

SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LVII.—No. 4.
[NEW SERIES.]

NEW YORK, JULY 23, 1887.

[\$3.00 per Year.]

IMPROVED TYPE COMPOSING AND DISTRIBUTING MACHINE.

A great deal of ingenuity has been exercised upon the perfecting of labor-saving machinery for the composing rooms of printing offices, and quite a large number of devices for setting up and distributing type mechanically are now actually in use. Whether the ordinary conditions of the printing trade are such as to render a general use of this machinery impracticable, or whether a conservative adherence to time-honored customs is antagonistic to revolutions such as would ensue upon the adoption of wholly efficient composing and distributing machinery, need hardly be discussed. It is certain that in this country at least, while such machinery does find favor in quite a number of offices, their use does not extend widely. Of course they are necessarily costly and complicated, and assuming everything to be satisfactory, they must be


kept in constant use to effect any marked economy, or rather perhaps to avoid a loss.

One of the most interesting objects at the American Exhibition, now open in London, is a machine of this kind. We illustrate it below by a general view, and by some diagrams which will serve to show the general mode of working.

As will be seen on reference to the general view, the two principal features of the Thorne type setting and distributing machine are a keyboard and two vertical cylinders, C and C¹¹, having the same axis, the upper cylinder resting on the lower one. Both cylinders are cut with a number of vertical grooves, C¹ C¹¹, of such a form as to receive the type, which is to be first distributed and then reset. In the machine shown at the exhibition there are 90 of these vertical grooves in each of the cylinders, sufficient to contain enough characters and kinds of characters as are wanted for ordinary

purposes, but of course machines are made with a greater number of these grooves. The keyboard carries a number of keys corresponding to that of the grooves, and when the machine is in operation, whatever key is depressed, the letter corresponding to it is thrown from its proper groove in the cylinder, C¹¹, upon a circular and revolving table, D, which has the same axis as the cylinder, but is of larger diameter. Of course quite a number of types may thus be ejected from the grooves in each revolution of the disk, D, and all are brought round in their proper order to a point of delivery, where they are taken up by a traveling metallic band, K, and fed continuously in front of the keyboard to a galley, M. Here any justifying that is necessary is done by a second operator, who stands opposite the small case, N, containing spaces, quads., etc., any desired one of which can be thrown forward by an

(Continued on page 52.)

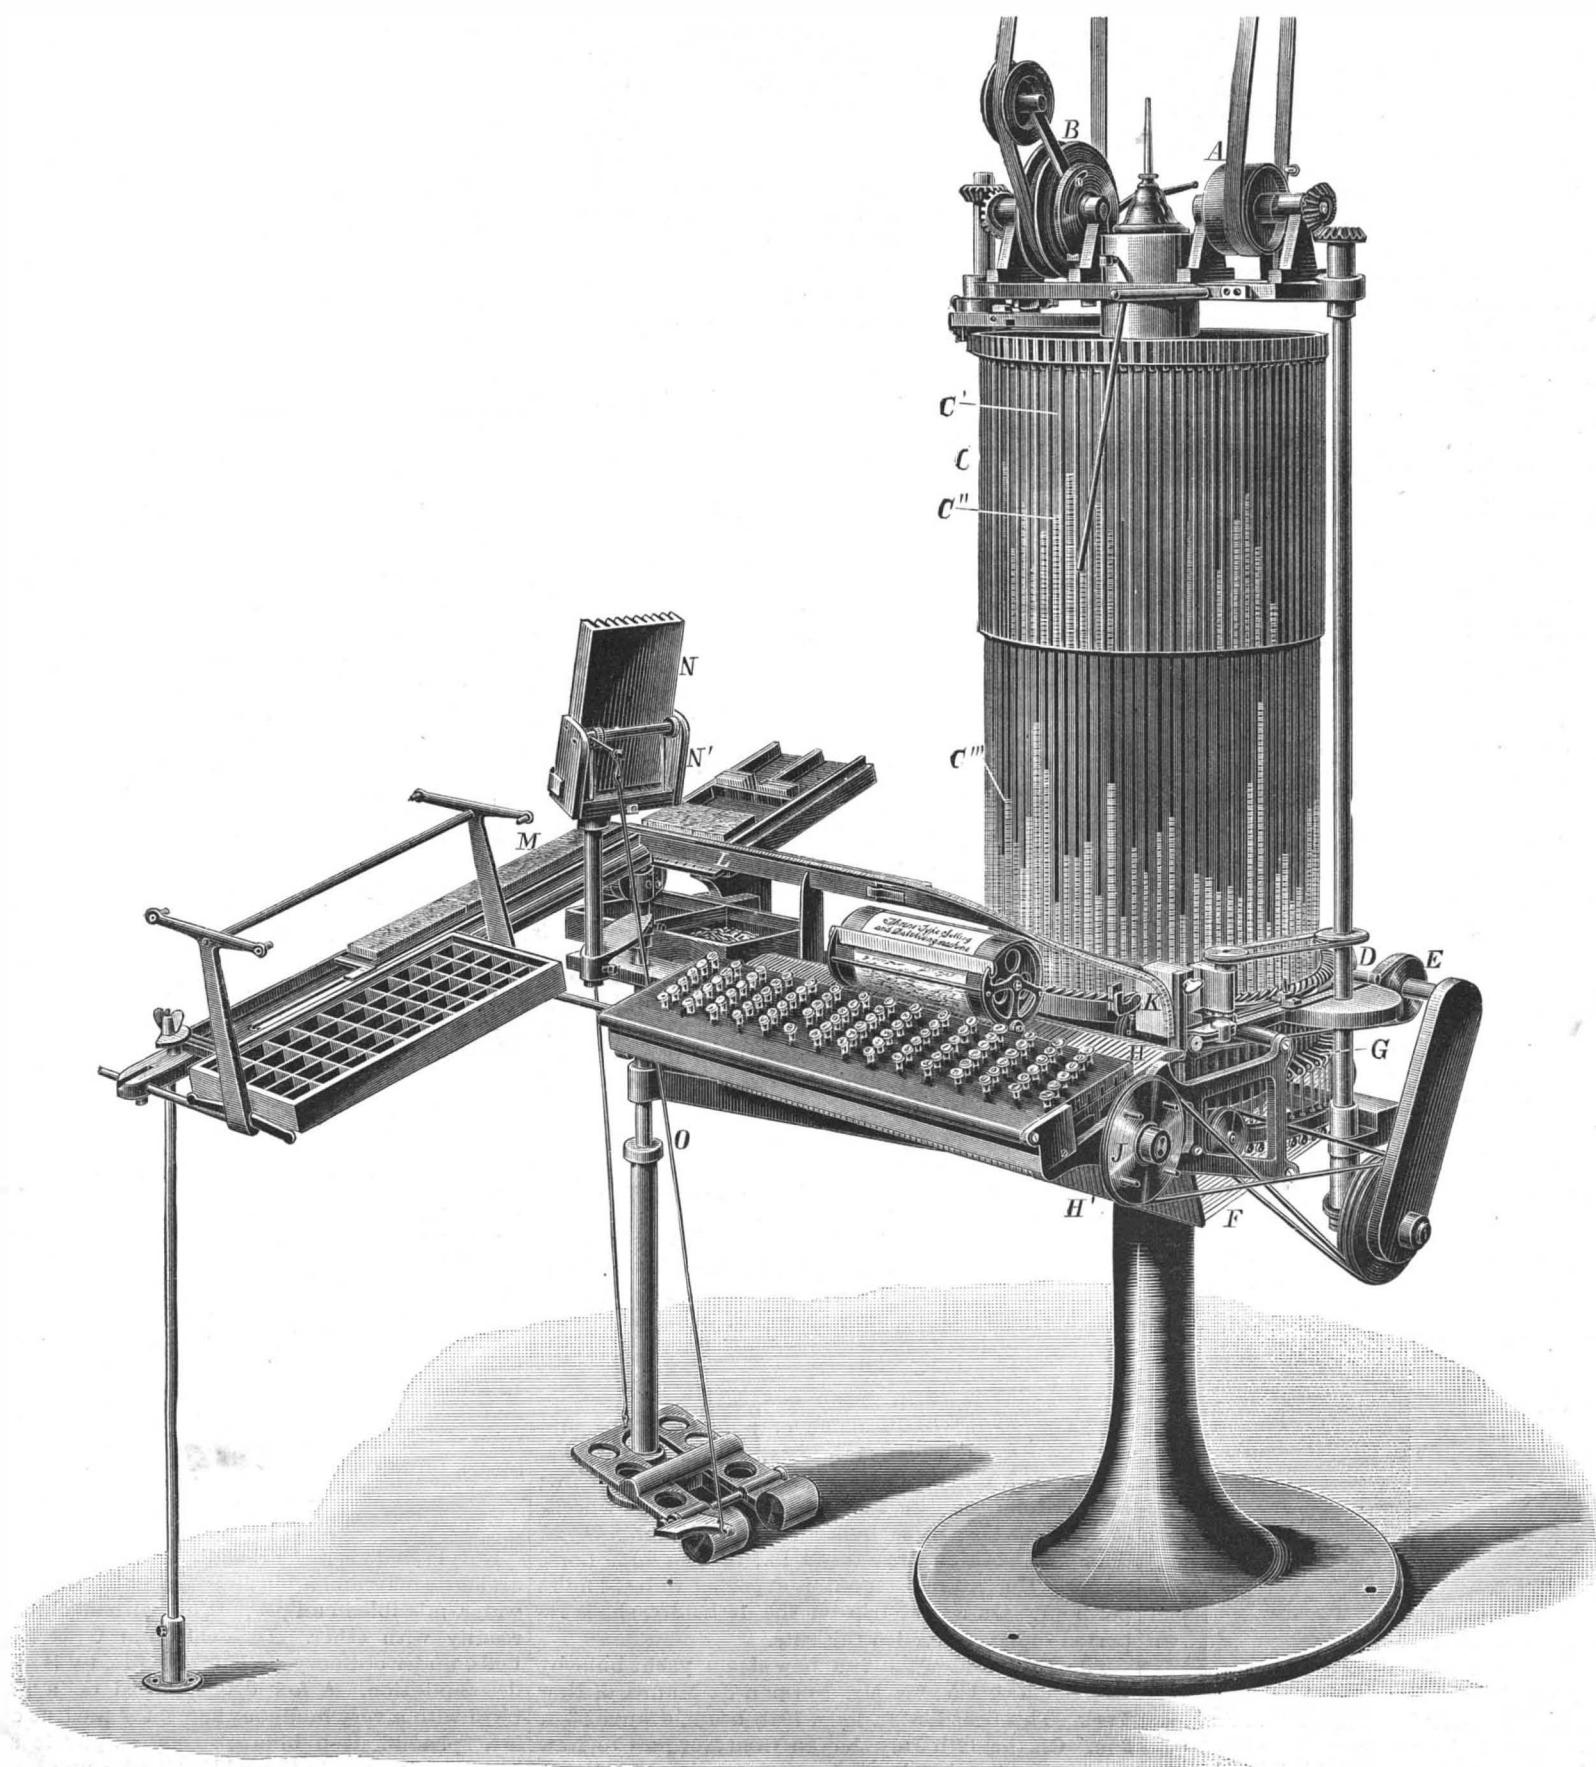

IMPROVED TYPE COMPOSING AND DISTRIBUTING MACHINE.

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN.

A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S. or Canada.....\$3 00
 One copy, six months, for the U. S. or Canada..... 1 50
 One copy, one year, to any foreign country belonging to Postal Union, 4 00
 Remit by postal or express money order.

Australia and New Zealand.—Those who desire to receive the SCIENTIFIC AMERICAN, for a little over one year, may remit £1 in current Colonial bank notes. Address

MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, \$5.00 a year, for U. S. and Canada. \$6.00 a year for foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to any address in U. S. or Canada, on receipt of seven dollars.

The safest way to remit is by draft, postal order, express money order, or registered letter.

Australia and New Zealand.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for a little over one year on receipt of £2 current Colonial bank notes.

Address MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

Scientific American Export Edition.

The SCIENTIFIC AMERICAN Export Edition is a large and splendid periodical, issued once a month. Each number contains about one hundred large quarto pages, profusely illustrated, embracing: (1) Most of the plates and pages of the four preceding weekly issues of the SCIENTIFIC AMERICAN, with its splendid engravings and valuable information. (2) Commercial, trade, and manufacturing announcements of leading houses. Terms for Export Edition, \$5.00 a year, sent prepaid to any part of the world. Single copies, 50 cents. Manufacturers and others who desire to secure foreign trade may have large and handsomely displayed announcements published in this edition at a very moderate cost.

Address MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

NEW YORK, SATURDAY, JULY 23, 1887.

Contents.

(Illustrated articles are marked with an asterisk.)

Alabandine.....	49	Insect destroyer of boots and shoes.....	56
Axle, wagon, lubricating, improved.....	51	Inventions, agricultural.....	58
Ball lightning.....	53	Inventions, engineering.....	58
Boats, fast, new.....	48	Inventions, index of.....	59
Books and publications.....	51	Inventions, mechanical.....	58
Bridge, Mississippi, new.....	57	Inventions, miscellaneous.....	58
Bridge, suspension, curious.....	55	Iodine stains, removing.....	51
Brown reins or saddle leather.....	55	Items of interest, many.....	49
Business and personal.....	58	Krupp, Alfred.....	48
Buryl sebate.....	48	Lantern slide, novel.....	55
Calf weaner, improved.....	51	Lubricator, vehicle, improved.....	50
Car coupling, improved.....	51	Mammal, an extinct.....	57
Cart, dirt, self-loading.....	50	Mount Pilatus railway.....	54, 55
Clyde-built vessels, fast steaming.....	51	Nitro-glycerine in shells.....	50
Contagion, carriers of.....	53	Notes and queries.....	59
Electric light in telemetry, use of.....	56	Nutshell cutter for confectioners, etc.....	51
Fire, cause of, curious.....	51	Oak, gigantic.....	49
Fluoride of nitrogen.....	52	Photographic notes.....	49
Folding rack for solar printing frames.....	50	Railway, Mount Pilatus.....	54
Fountain for projection, circulating.....	55	Respiration, artificial, simple method of.....	53
Glass, platinizing.....	55	Sound, mirage of.....	56
Guns, magazine.....	48	Stand, convertible.....	56
Gymnastics at school.....	53	Steamships, fast, two large.....	57
Harness collars.....	56	Tramway, long.....	53
Horse collars, pad for.....	51	Type composing and distributing machine.....	47, 52
Ice plow teeth, fastening for.....	50	Wealth, does labor produce all.....	53

TABLE OF CONTENTS OF SCIENTIFIC AMERICAN-SUPPLEMENT No. 608.

For the Week Ending July 23, 1887.

Price 10 cents. For sale by all newsdealers.

I. BIOGRAPHY.—Antoine Laurent Lavoisier.—The life of the great French chemist.—His tragic death.—Translation of a hitherto unpublished letter by him to Black, the great English investigator.—His portrait by David.—1 illustration.....	9637
II. CHEMISTRY.—Iron and Steel Analysis.—By J. JAS. MORGAN.—The various leading methods for this work described, with the apparatus needed.—2 illustrations.....	9636
III. ELECTRICITY.—Electric Lamp for Divers.—An electric lamp of 100 C. P. fitted to a diver's helmet, to be actuated by a dynamo.—1 illustration.....	9631
Pellat's Absolute Amperemeter.—A recent French apparatus, described with formulas for its construction.—3 illustrations.....	9634
Systems of Distribution of Electricity.—By ELIHU THOMSON.—The seventh Sibley College lecture of the 1887 course.—A full review of the present state of this branch of electrical engineering.—18 illustrations.....	9632
IV. ENGINEERING.—Jardin's Hydraulic Press and Injection Pump.—A new hydraulic press for extracting oil.—Its construction for hand and for steam power.—5 illustrations.....	9628
The Panama Canal.—A recent review by Dr. WOLFFRED NELSON of the work on the Isthmus, with special reference to the difficulties encountered.....	9624
The Port of Cadiz.—An exhaustive account of the great engineering works at this port and their cost.—7 illustrations.....	9625
V. GEOLOGY.—Natural Gas.—The outlook for natural gas in the State of New York.—Prof. Henry Wurtz's remarkable prophecies made in 1871.....	9630
VI. METALLURGY.—Composite Steel and Iron.—The defects of steel, its sensitiveness to damage, and attempts to produce a new material free from these troubles.....	9635
VII. MISCELLANEOUS.—Correction.—The wave theory of sound considered.—Correction in Prof. H. A. MOTT's late article on the above subject.....	9635
MacCord's Scale.—Note by Prof. MACCORD on the use of his table for gear cutting.....	9635
Shadow's Group of the Princesses.—Statue of the princesses of the house of Mecklenburg married to King William of Prussia and Prince Ludwig of Prussia respectively.—1 illustration.....	9623
Taking a Bullet from the Brain.—A remarkable surgical operation described.....	9637
The Cycle and the Road.—By the Rev. J. M. TAYLOR.—The Oarsman tricycle reviewed and described by its inventor; use of the cycle in war.....	9629
VIII. NAVAL ENGINEERING.—Launch of H. M. S. Victoria.—Account of the launch of this ironclad from Sir William Armstrong's yard, with his speech on the occasion, giving the progress of naval engineering.....	9627
The French Warship Neptune.—A recent addition to the navy of France, launched at Brest; her armament of steel plate and cellulose.—3 illustrations.....	9625
IX. PHYSICS.—Curious Optical Illusion.—An interesting experiment in physics without apparatus.—1 illustration.....	9636
X. TECHNOLOGY.—Diffusion Plant for Cane Sugar.—The diffusion process applied to cane sugar; a full description of a recent apparatus.—5 illustrations.....	9661
Practical Lithography in Half Tones.—By J. HUSBAND, Serkt. Major, R. E.—A new process of photo-lithography, with formulas.....	9680
Refined Slag in the Manufacture of Glass.—By A. D. EILBERS.—An interesting use for this refuse material.....	9630

ALFRED KRUPP.

The news of the death of the chief proprietor of the great Krupp steel works, at Essen, Prussia, has just been cabled to this country. On July 14, at his villa near Essen, Alfred Krupp breathed his last. He has been aptly classed with Bismarck and Moltke as the third of Germany's warriors, as his cannon did such fearful execution in so many battles for the fatherland.

Though it was in Alfred's hands that the works attained their great magnitude, he was not their founder. His father, Friederich Krupp, was born in 1787, and was proprietor of a small "hammer forge" driven by water power, and situated near the present Essen. In 1816 he moved to Essen, and on a locality in the center of the present works erected his modest shop. Here he remained to the day of his death, executing a variety of small work in steel. The works were of the smallest scale. The age of steel had not yet come. Four years before he moved to Essen, his eldest son was born. On April 26, 1812, Alfred Krupp first saw the light. On October 26, 1826, his father died.

The works were placed in charge of Alfred, who conducted them for his mother Theresa. For many years his younger brother Hermann worked as a workman in the forge. The growth of the business was very slow, and long before it attained any size, the brother Hermann left it and entered upon another line of work. On February 24, 1848, the firm was given the name of "Friederich Krupp," in honor of the founder of the Essen works.

The growth of the works became more rapid as steel was more widely used. In 1851, Krupp was already in the front ranks of the world's steel producers. He sent to London world's fair of that year a great block of steel, the largest that up to that time had ever been produced. Agricultural and engineering appliances received most of Krupp's attention until the manufacture of steel cannon was undertaken by him. In the Paris exposition of 1867 a prize was awarded him for his cannon, that four years later were to be a powerful factor in bringing about the conclusion of the Franco-German war. He was one of the early advocates of steel guns, and at an early period saw that the successful breech-loading cannon was to be the gun of the future. The size of his pieces increased year by year. He maintained a hot rivalry with Sir William Armstrong in the production of the largest and most powerful gun. With the exception of England and the United States, almost all of the principal countries bought cannon at Essen. The more peaceful branches of his business were not neglected, as massive steel forgings of all kinds of axles, crank shafts, locomotive tires, and the like were and are made in vast quantity at Essen. In 1864, at the conclusion of the Danish war, letters of nobility were offered him by the King of Prussia, but he refused them.

The works, and incidentally the town of Essen, had grown with unprecedented rapidity. The economic triumphs of his life, in developing such an establishment, are perhaps the greatest, exceeding in their beneficial aspect his metallurgical exploits. His father's works, it is said, began with two workmen. In 1860, 1,764 hands were in Alfred Krupp's employ. In 1870, 7,084 men were on his rolls. To-day, including the works, blast furnaces, and mines, nearly 20,000 workmen, representing with their families, as it is computed, about 66,000 souls, are maintained by the Essen works and dependencies. The establishment is classified by sections: 1, the factory at Essen; 2, three coal mines at Essen and Bochum; 3, five hundred and forty-seven iron mines in Germany; 4, several iron mines in Spain north of Bilbao; 5, the blast furnaces, in 1885 eleven in number; 6, a range for trial of artillery at Meppen; 7, other smaller ranges; 8, four steamers for marine transport; making eight sections into which the business is divided.

The management of the works is in the hands of a syndicate of the owners, who consult with Friederich Alfred, the only son of the late proprietor, as to the more practical details of the work.

The town of Essen now numbers nearly one hundred thousand inhabitants. Outside of the city limits a great portion of the employees have their homes, lodgings to the number of four thousand being owned by the firm.

NEW FAST BOATS.

The New York is the name of a new and splendid passenger boat designed for service on the Hudson River. She is 311 ft. long; depth moulded, 12 ft. 3 in.; hull of iron; tonnage, 1,552; feathering paddle wheels, 30 ft. diameter; three boilers each 33 ft. long, 9½ ft. diameter, working pressure 50 lb., furnish 3,850 horse power. Her average speed is expected to be 23 miles per hour. On a trial trip on the 13th July, she is reported to have exceeded this rate.

The Now and Then is a new steam yacht built by Herreshoff & Co., for Mr. Norman L. Munro, of New York. This boat is 85 ft. long, 10 ft. beam, draught 3 ft. 3 in. On the 12th July she ran from Newport to New York, 170 miles, in 7 hours 4 minutes, being an average of 24 miles an hour. This is claimed as the fastest time for a steam vessel, for any considerable distance, on

this side the Atlantic. The parties interested make considerable brag over her performances.

The speeds of both the above vessels are excellent, but they fall considerably short of the latest engineering realized in England. For example: The new passenger steamer Queen Victoria, of the Manx line, plying between Liverpool and the Isle of Man, is 340 ft. long, 39 ft. beam, 24 ft. depth, gross tonnage 1,500 tons, engines 6,000 horse power. Believed to be the fastest merchant steamer afloat. She lately steamed from Greenock to Liverpool, about 240 miles, in 9 hours 23 minutes, her average speed being 25.62 miles per hour.

The Prince of Wales, another boat of same build and dimensions, is expected to have the same speed. The Cunard steamer Etruria, plying between New York and Liverpool, sometimes steams 557 miles in 24 hours, being an average of over 23 miles per hour. J. & G. Thompson, of Clydebank, are now building two new steamers which are to surpass the Etruria in speed.

The Italian iron clad Dogali, 267 ft. length, 37 ft. beam, mean draught 14 ft. 6 in., has a speed of 23 miles an hour.

The new German war steamer Greif can make 25½ miles per hour. The Thornycroft torpedo boat lately built at Chiswick for the Spanish government is 147 ft. 6 in. long, 14 ft. 6 in. beam, and draws 4 ft. 8 in. water. On a recent trial trip, tide in her favor, she attained a speed of 33½ miles an hour with the tide, and a mean speed of 30 miles per hour, with and against tide.

A torpedo boat lately built by Yarrow & Co., for the Chinese government, is 128 ft. long, mean speed 27½ miles per hour. The same builders have delivered to the British government boats of the Falke type that average 26½ miles per hour, 135 ft. long, 14 ft. beam, boilers 1,660 h. p.

Torpedo boat number 79, same builders, reached a mean speed of 26½ miles per hour; 125 ft. long, 13 ft. beam. Engines 1,000 h. p.

The twin screw torpedo boat recently built at Poplar, by Yarrow & Co., for the Italian government, attained a mean speed loaded of 28 miles per hour. Length 140 ft., beam 14 ft., draught 5 ft. 4 in., displacement 100 tons. Engines 1,400 i. h. p.

It is doubtful if there are any corresponding vessels in our waters that can equal the foregoing in point of speed, nor is there any present evidence of our ability to construct them. We are building new war ships, but before they are finished they will be out of date in respect to speed. Not one of the new vessels is expected to run as fast as the boats above mentioned.

Whether for use in war or peace, the first requisite, in these active days, is high speed.

In the forthcoming international yacht race, in which sailing vessels only will compete, it is to be hoped our transatlantic rivals will, as before, suffer defeat; but if the race were to be with steam vessels, it is certain we should be left in the lurch.

Is there no one in this great country possessed of means and brains enough to produce a steam vessel that shall beat the world?

Magazine Guns.

The repeating rifle of the German army differs from the ordinary rifle in the fact that the stock, instead of stopping short where it is grasped by the left hand, is prolonged to within an inch of the end of the barrel. This constitutes the reservoir of cartridges. The firing consists of three movements—the "ready," during which each man gives a sharp turn to the right to a lever above the lock of his gun, and the familiar "present" and "fire." The company stand four deep, the two front ranks firing while the two rear ranks recharge their magazines. So rapid are the movements that the magazine is emptied, with a perceptible allowance each time for rapid aim, in ten seconds. To think of what would happen to any body of men exposed to half a minute of firing like this is simply appalling.

It is all very well for a Russian governor to issue orders to his troops calling upon them to remember that battles are won by courage, and not by repeating rifles; but the moral effect of the new weapon both upon those using it and those opposed to it must be enormous. To be able to wait until the enemy, in whatever form he may be, is within a few yards of you, and then to deliver your fire upon him at the rate of a shot a second, is quite enough to revolutionize all attack formations.—*Broad Arrow.*

Butyl Sebate.

Butyl sebate is a colorless liquid of an agreeable and aromatic odor and a burning taste. It is insoluble in water, miscible in all proportions with alcohol, but less readily with ether. Its density at 0° is 0.9417. It boils, under ordinary pressure, at 344° to 345° without decomposition. A few drops placed on a glass rod burn with a very luminous flame, the nucleus of which is a splendid deep blue. Strong sulphuric acid decomposes it, even in the cold. Caustic potassa saponifies it, ammonia gives a white precipitate of sebamide in microscopic crystals.—*G. Gehring.*

PHOTOGRAPHIC NOTES.

Toning Bromide Prints with Platinum.—In a communication to the *Photographic News*, Leon Vidal refers to the advantage of changing the character of bromide prints by toning with bichloride of platinum, which, in his opinion, renders them more permanent. He says: After development with ferrous oxalate, and washing in water acidulated with acetic acid, the prints are immersed in the toning bath, composed as follows:

Bichloride of platinum..... 1 gramme.
Water..... 2 liters.
Pure hydrochloric acid..... 30 grammes.

The prints are left in this bath sufficient time for them to be well covered with a good coating of platinum, this metal being gradually substituted for the silver. The image is weakened under the action of the toning bath. Therefore over-exposure is necessary, as is the case with impressions on albumenized paper. With a little practice, it is easy to know what the proportion of this over-exposure should be, and also the time necessary for the immersion in the platinum bath. To verify whether the toning action is produced, and to appreciate its intensity, have at hand in a small dish a solution of 12 per cent of bichloride of copper dissolved in water. Before toning, the image on a fragment of a print plunged into this bath will completely disappear, the reduced silver being transformed by the bichloride of copper into white chloride of silver; but as soon as the deposit of platinum has begun to take place, this metal not being attacked by the liquid in question, an image at first feeble is seen to remain, becoming more and more powerful in proportion to the time of immersion in the platinum bath. Images thus produced are indestructible; for admitting that that portion of the image which is of silver may completely disappear, there will always remain the platinum image, somewhat attenuated, it is true, but quite complete, however, if the duration of the exposure and development have given an intense proof. There will remain an image of sepia color; and we may assure ourselves, without waiting for it, of the effect of any alteration due to time, by plunging, after toning, the entire proof into the bath of bichloride of copper. All reduced silver which has not been replaced by platinum will be transformed into white chloride of silver; and what remains visible is an image formed solely of platinum. If it is desired to preserve it as such, there is nothing further to do than to place the image in hyposulphite of soda to dissolve all the chloride of silver, and an image will remain formed exclusively of platinum. It may be that in studying this question more deeply we may succeed in forming on the silver image a deposit of platinum of a black color. We are now engaged in experiments having this end in view. When a proof has been passed through the bath of bichloride of copper, in order to ascertain the amount of platinum that has been deposited, it may be easily restored to its primitive condition by immersing it, after washing it in three waters, in a bath of ferrous oxalate identical with that which has served to carry on the development. The image immediately regains its original vigor, and there is nothing to prevent its being afresh submitted to the action of the toning bath for a more complete platinization if required.

It will be noticed that when the image has been made to disappear in the bichloride of copper bath, it becomes more brilliant and of a bluer black tone when reconstituted in the ferrous oxalate bath. We may even, thanks to the use of this bath, succeed in reducing a too vigorous impression. This offers a very important advantage when enlarged proofs are in question. In such case we must over-expose, because we have the power of afterward very easily bringing back the image to the desired depth. From what has just been said, it naturally results that positive gelatinobromide of silver papers conduce to applications which are of very great interest, and which could not be realized with so many advantages by any other sensitive preparations.

We only insist that platinum toning allows us to obtain, at less cost than by any other means, images having platinum as a base, and under conditions, as to rapidity, of great value. We believe we render a service to our photographic brethren by pointing out a method destined to extend the field of their labors. No one has up to the present, so far as we know, published the means of assuring the permanence of impressions obtained upon gelatinobromide of silver papers, at the head of which we do not hesitate to place those of the firm of Eastman & Co.

Alabandine.

A solution of manganese acetate, even if slightly acidified with acetic acid, gives an abundant precipitate if treated in the cold with sulphureted hydrogen. There is formed the well-known rose-colored sulphide, which, if heated to 100° in a closed vessel, is transformed into the compact green variety. On prolonged standing, crystals are produced, even at common temperatures, and prove to be alabandine.—*H. Baubigny, Comptes Rendus*, vol. civ., No. 20.

Many Items of Interest.

The *Electrical Review* thinks many will be surprised by the statement that more than 3,500,000 passengers are carried annually in this country on street cars moved by electric motors. In Montgomery, Ala., electricity is used on eleven miles of road, and the cost is reported by the general manager to be only one-half the cost of horse power. Roads on which electricity takes the place of horses are found in Baltimore, Los Angeles, Port Huron, Detroit, Scranton, Appleton, Wis., and Denver. Electric railways are either in course of construction or under contract in twelve other cities, and in thirty-seven, companies have been formed or other steps taken for the building of such roads. Upon none of the roads now in operation in this country, however, is force supplied by storage batteries attached to the cars. In most cases, power is communicated by an overhead conductor.

The pests known as Buffalo moths prevail in many localities along the Hudson River, and in the aggregate the loss they have entailed is large. All sorts of devices, including benzine, tobacco, cedar shavings, and various other agents, have been used by busy housewives for the extermination of the pests, but without avail. They infest bureau draws, and riddle holes in linen and in all kinds of dry goods. They are found in closets and wardrobes, in trunks and under carpets. In some places these little furry-coated moths pursue their way so industriously that housewives do not fasten down their carpets, as they have to be lifted regularly every day to kill the moths.

For a kitchen floor, especially one that is rough and uneven, some one in the New York *Tribune* recommends the following glue paint: To three pounds of spruce yellow add one pound, or two pounds if desired, of dry white lead, and mix well together. Dissolve two ounces of glue in one quart of water, stirring often until smooth and nearly boiling. Thicken the glue water after the manner of mush, until it will spread smoothly upon the floor. Use a common paint brush, and apply hot. This will fill all crevices of a rough floor. It will dry soon, and when dry apply boiled linseed oil with a clean brush. In a few hours it will be found dry enough to use by laying papers or mats to step on for a few days. When it needs cleaning, use hot suds.

The Hartford Steam Boiler Inspection and Insurance Company have favored us with a bound volume of the *Locomotive* for 1886. It is a book of nearly 200 pages, full of matter of interest to steam users and those having charge of boilers. This matter relates to current practice, and gives the latest experience and observations on steam boilers. The price is one dollar, and it may be had at the office of the company, Hartford, Conn.

The way in which glass may best be cut with scissors is told in the *Pottery Gazette*, London: Glass may be cut under water with great ease, to almost any shape, with a pair of shears or strong scissors. Two things are necessary for success. First, the glass must be kept quite level in the water while the scissors are applied; and secondly, to avoid risk, it is better to perform the cutting by taking off small pieces at the corners and along the edges, and to reduce the shape gradually to that required. The softer glasses cut the best, and the scissors need not be very sharp.

A singular fire occurred in this city on the 13th inst. in the following manner: By the crossing of two telegraph wires, sparks were produced which set fire to a telegraph pole in John St., opposite the Western Union building. There were about 150 wires hung on the pole. An alarm of fire was sounded, and soon engines arrived and the pole was saved. The flames were near the top, and it was with some difficulty that water could be raised to such a height; but at last the effort was successful and the flames were overcome, amid the shouts from the 2,000 or 3,000 persons who had assembled on Broadway.

Some new quick-firing guns of heavy caliber, intended for the British navy, have just been successfully tried upon the proof ground of Sir William Armstrong, Mitchell & Co., near Silloth. The first weapon tried was a 36 pounder improved rapid-fire breech-loading gun of caliber 4.724 in. This was fired with 7½ lb. of powder. The weapon is made entirely of steel, its length being 14 ft. 2½ in., length of barrel 35 calibers, and weight 34 cwt. Ten rounds can be fired in 47 seconds, giving a rate of fire six times faster than the present service of guns of the same caliber. The next gun tried was a 70 pounder, which was discharged about half a dozen times, both with 25 lb. and 30 lb. charges, at a speed of from eight to ten rounds per minute. According to the *Naval and Military Gazette*, London, the results were considered satisfactory.

Copies of photographs of flashes of lightning are desired by the Council of the Royal Meteorological So-

ciety, London, who hope that many photographers may be found willing to take up the matter. It is pointed out that there is no special difficulty in photographing lightning, as, if a rapid plate and an ordinary rapid doublet with full aperture be left uncovered at night during a thunderstorm for a short time, flashes of lightning will, after development, be found in some cases to have impressed themselves upon the plate. There is, however, uncertainty whether any particular flash will happen to have been in the field of view.

California has a well deserved reputation of doing everything on a grander scale than any other State in the Union, and this peculiar phase of her development is soon to be manifested by the erection of a huge tomb in the Mountain View Cemetery, Oakland, Cal. This mortuary monument is being erected by the millionaire physician, Dr. H. D. Cogswell, to his own memory and from designs made by himself. Dr. Cogswell has already achieved notoriety, not perhaps always properly appreciated, by his presentation of drinking fountains to various cities, from designs of which he himself is the originator. The monument, which is his latest achievement, and with which he proposes to keep his memory ever green, and which he intends shall stand as an everlasting memorial of his wealth and genius, will be over 70 ft. high, and will be placed in the center of his large circular lot. The granite plinth contains 23 square feet, and is in four pieces. The first base stone is over 12 ft. square. There are three enormous stones placed one above the other over the base stone, and each slightly smaller than the one below it. The die is 5 ft. square, with raised polished moulded tablets on each side, and upon this will be raised the obelisk. There are polished columns at the four corners of the die, and upon the columns at the base of the obelisk are placed four female marble figures, 7 ft. high, representing Faith, Hope, Charity, and Temperance. The obelisk is 4 ft. square and 36 ft. high, and weighs 29 tons, and carries at the top a dome covered with bronze work, with a single glass star, measuring 7 ft. from point to point. There will be elaborate stone work about the monument, and the whole will cost, it is estimated, over \$75,000. The granite work is being conducted by Mr. Alexander McDonald, of Cambridge, Mass., the stone being supplied from Mr. McDonald's quarry at Mason, N. H., and is now in course of transportation across the continent.

"Are you aware of the extent of the toothpick business in Maine?" Mr. J. C. Bridgman, who represents the National Toothpick Association, asked a representative of the Portland (Maine) *Press* the other day. "That seems to be a pretty big name for small business, I suppose you think," he continued. "But you will be surprised when I tell you that our association have contracted for enough toothpicks to be made in Maine the coming year to load a train of fifty cars with nothing but toothpicks. We shall take out of Maine before next June five thousand million toothpicks. A pretty fair sized wood lot, you see, will be slit up to go into the mouths and vest pockets of millions of Americans. Maine furnishes the larger portion of all the toothpicks used in the country. Our association controls the trade. It is something like the Standard Oil Trust, the Cotton Seed Oil Trust, and the lately formed Rubber Trust. It regulates the price and output of toothpicks as the big trusts regulate the prices and output of oil or rubber goods. We have not adopted the name Toothpick Trust yet, however. We have a mill at Belmont, N. Y.; Harbor Springs, Mich.; and Fond du Lac, Wis. Besides these, all our mills are in Maine; one at Strong, one at Farmington, one at Canton, and two at Dixfield. There is a small mill at Mechanic Falls, also, but it has not joined our association. In Massachusetts, also, there is one small mill not in the association. So you see Maine is the great center of the industry of toothpick making."


A Gigantic Oak.

One of the sights at Havre Maritime Exhibition is the trunk of a gigantic oak placed in an iron boat especially constructed for its reception. This trunk was found accidentally in the bed of the Rhone, at La Balme, as long ago as 1874, when, during a period of low water, a branch was observed projecting above the surface. On a closer examination, this was found to belong to a huge trunk embedded in the mud of the river. It was not till ten years later (1883) that the level of the water was low enough to enable the tree to be taken out. It took five months to remove it from the bed of the river, some 30 feet of sand and gravel having to be removed in order to liberate it. At length, on March 25, 1884, it was brought to the shore, where the dimensions of the trunk were found to be as follows: Length, 101.6 feet; circumference at the origin of the roots, 29.5 feet; circumference at the level of the soil, 19.6 feet. The actual weight of the tree is 121,000 pounds, and its age is estimated to be from 400 to 450 years.


The boat, called the Dryophore ("oak bearer"), is intended to transport the tree from river to river, for exhibition.

AN IMPROVED FASTENING FOR ICE PLOW TEETH.

In the cutting of ice for market in large quantities, as the industry is carried on up the Hudson River, and in other places, plows are employed, which have several teeth, one behind the other, each following tooth cutting deeper than the one preceding it, and the shallower cutting teeth set at a greater inclination than those which cut deeper. On this account it has heretofore been necessary to fit each tooth fastening separately upon the plow plate and tooth sections carried by the plow

**BODENSTEIN'S FASTENING FOR ICE PLOW TEETH.**


beam. This difficulty is obviated by the invention herewith illustrated, which forms the subject of a patent recently issued to Mr. Henry Bodenstein, of Staatsburg, N. Y., the fastening shown accommodating itself to the various inclinations of the inserted teeth, which are thus held firmly and rigidly in position, yet so as to admit of ready adjustment. The forward edges of the plate sections against which the teeth rest are beveled to receive grooves formed on the back edges of the teeth, and against the front edge of each tooth is held a stop plate of novel form, this stop plate having two bearings against the tooth, and being held in position by a wedge key, which brings the teeth in rigid contact with the plate sections. The peculiar formation of the stop plate and wedge key is such that they always have an even and positive bearing upon each other and upon the teeth and plate sec-

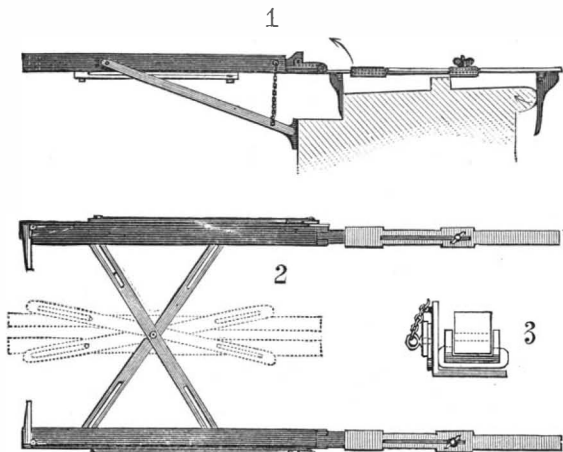**STRACHAN'S RACK FOR SOLAR PRINTING FRAMES.**

tions, and when a new tooth is inserted of greater or less width, the inclined edge of the stop plate will accommodate itself to the difference.

A STAND ADJUSTABLE FOR MANY USES.

A framework of simple construction, adapted for readily forming therewith quite a variety of stands desirable for various household uses, and which can be quickly taken apart and folded up into compact form for storage or removal, has recently been patented by Mr. Frederic S. Weatherley, of the city of Quebec, Canada. Its adaptations and the principal features of construction will be readily understood from the illustration, the vertical posts forming the end supports being permanently connected in pairs, and rigidly braced by four parallel cross bars. The end posts are

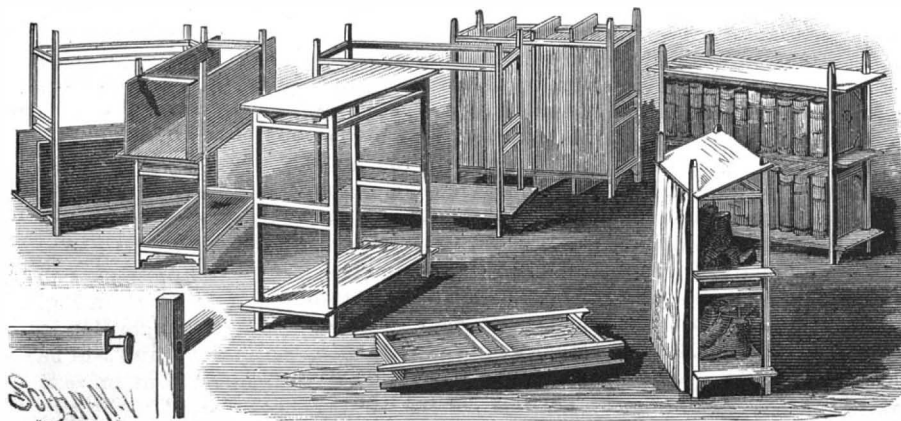**WEATHERLEY'S CONVERTIBLE STAND.**

longitudinally connected by side bars, one end of each bar being hinged to a post and its free end being formed with a tenon that fits in a corresponding slot in the opposite post, each post thus carrying one hinged end of the side bar, and having a socket for the reception of the free end of another side bar. Three boards of like size are employed in connection with the frame, each of them having slots in their edges adapted to fit closely the posts, and the end and side bars, which are of equal and uniform cross section. At the base of each of the slots in the boards is pivoted a catch adapted to be swung into angle slots in the inner corners of the side bars and end cross bars, and small blocks, equal to the thickness of a board, are adapted to fit in the corners in such way that a table may be made with its upper surface flush with the tops of the posts, or the boards will fit the posts to make a table with an inclined top.

A SELF-LOADING DIRT CART.

A cart designed to automatically take up its load as the cart is started forward is shown in the accompanying illustration, and forms the subject of a patent issued to Mr. Samuel M. Stevenson, of Bastrop, La. The scoop or shovel is rigidly attached to two rearwardly extending levers, pivotally connected to clips secured to the axle, these levers having outwardly extending flanges, which lie within the path of roller-carrying pins upon the spokes of both wheels. When the wheel is revolved, these rollers attached to the spokes raise the levers, carrying the scoop with its contents up over the body of the cart to the position shown in dotted lines in the illustration, whereby the scoop will be emptied into the cart. Just as the levers carrying the scoop reach this position, the rollers upon the spokes of the wheels pass beyond the upper edges of the flanges upon the levers, and the latter drop back to the ground. To an upwardly extending arm of the clips upon the axle are connected levers carrying rods and standards, whereby either of the wheels of the cart can be readily raised from the ground and turned to register with the other wheel, so that the rollers upon the spokes of both wheels will engage simultaneously with the scoop-raising levers. After the cart has been loaded, and is to be moved from place to place, the levers, with the scoop, are held in vertical position over the cart body by side chains from the shafts, the load being delivered from the cart by dumping in the ordinary way.

A FOLDING RACK FOR SOLAR PRINTING FRAMES.

An improved rack for holding the frames to obtain sun exposures conveniently from a window, as ordinarily required in photographic printing, is shown in the accompanying illustration, and forms the subject of a patent recently issued to Mr. Joseph Strachan, of No. 322 Madison Street, Brooklyn. Fig. 1 is a side view, the parts being represented as they appear locked in the window in position to support a printing frame. Fig. 2 is a plan view, the dotted lines showing the frame as folded for storage, Fig. 3 being a sectional view through the clamping attachment. It will be readily understood from the illustration how the side arms are fixed at the desired distance apart for holding the printing frame, by the clamping of the cross rods at the requisite angle, the side arms having flanges for the introduction of the frame. The extensible clamping attachment on the inner ends of the arms is so made that the rack can be readily fixed in position in any window frame, and the brace rods under the arms are adjustable to support the rack in a horizontal plane, or at any desired angle, as will most facilitate printing at different times of the day, according to the position of the sun.

Nitro-Glycerine in Shells.


A number of experiments were made with nitro-glycerine on San Francisco Bay, north of San Francisco, California, on June 11th, which were witnessed by many interested persons. A number of shells were fired from a twenty pound Parrott gun, a three pound charge of powder being used. The first experiment was successful, the shell plowing on the opposite bluff ten seconds after leaving the gun. In the second and third experiments the shells used were defective, and failed to explode. The fourth struck the water

and extinguished the fuse. In the fifth trial the gun was aimed into the mud, and the shell exploding sent up a column of mud 100 feet into the air. The hole made by this shell was eight feet in diameter and five feet deep. In the sixth trial the shell was loaded with common powder, the other conditions being the same as in the fifth experiment. The concussion, however, was much lighter, the hole two and a half feet in diameter, and but one foot deep. The experiments were regarded as highly successful, as demonstrating the possibility of firing charges of nitro-glycerine in ordinary shells.

Curious Cause of a Fire.

The Boston *Commercial Bulletin* records a noteworthy instance:


A fire happened in a woolen mill in a most remark-

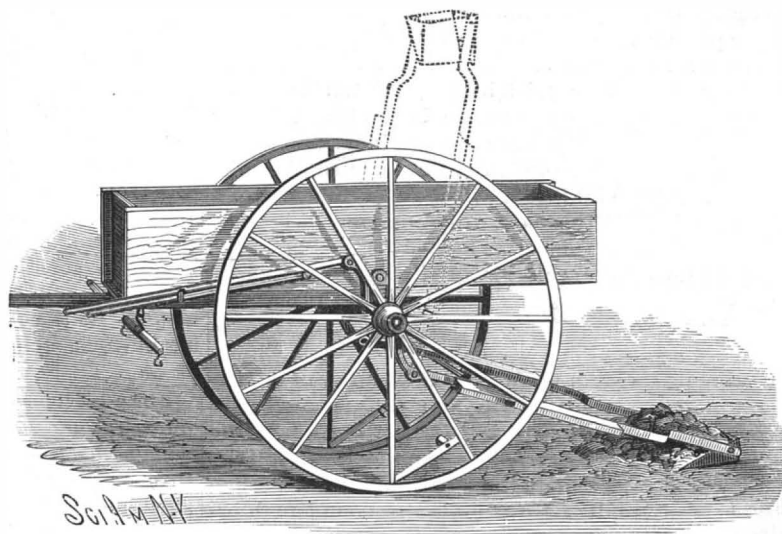**STEVENSON'S DIRT CART.**

able way a short time since. Two shuttles in a flannel loom got out of adjustment and the metal points struck each other so exactly on the end as to cause a spark that set fire to the warp. A pail of water extinguished the fire. A fire from this cause was never known before, and might never be known to occur again, as the most minute deviation would have caused the shuttles to slip by. Considering the velocity of their movement, it is as remarkable as though two bullets meeting in the air should strike one another exactly on the tip.

AN IMPROVED VEHICLE LUBRICATOR.

A lubricator intended for application to wheels of almost any vehicle has been patented by Mr. James P.

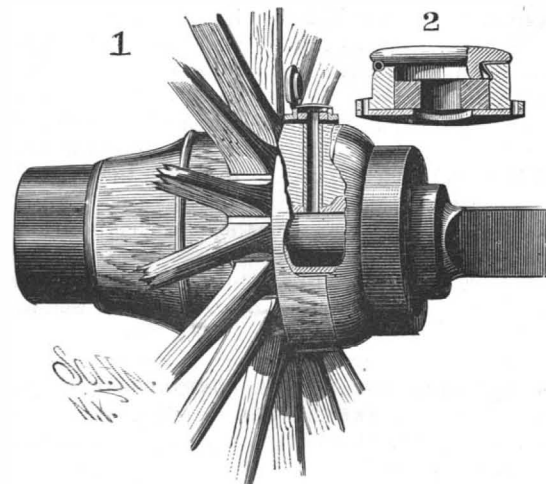**RUTH'S AXLE LUBRICATOR.**


Ruth, of West Alexander, Pa., and is shown in the accompanying illustration, Fig. 1 representing a hub with the lubricator in position, and Fig. 2 being a sectional view of the lubricator removed. The lubricator is in the form of a circular box, with outwardly extending lugs by which it may be fixed upon a hub, through the wooden and metal portions of which a vertical hole is made, and lined with a tube. About the upper end of this tube is placed a rubber washer, upon which the lubricator is seated, so that any lubricant poured through the central opening finds its way to the axle and box. Any escape of the lubricant is prevented by turning down the hinged cover, which is clamped to place by a spring. The use of this device obviates the necessity of removing vehicle wheels in order to lubricate the axles.

Magnesia for Vines.

Magnesia forms a very important constituent in all soils in which the French vine resists, and in those where the American vine flourishes best. Its percentage in the ash of the American vine is more considerable than in the ash of *V. vinifera*. Practical experiments are needed on the use of magnesium-ammonium phosphate as a manure for vines.—A. C. Dejardin.

AN IMPROVED LUBRICATING WAGON AXLE.

A wagon axle that may be easily and perfectly lubricated has been patented by Mr. Cornelius M. Regan, of Brooklyn, N. Y., and is represented in the accompanying illustration. A flange encircles the axle and overlaps the inner end of the box, which is thus protected from the sand and dust, and in the upper portion of the axle is formed an oil groove, about three sixteenths of an inch deep at the point to five sixteenths of an inch deep at the shank, to facilitate the distribution, but prevent the too rapid flow of oil. The oil is admitted to this groove through a vertical hole made in the axle back of the flange, an oil cup closed with a

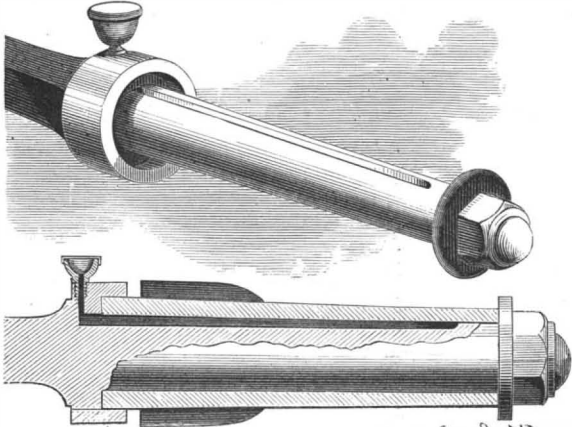

REGAN'S WAGON AXLE.

cap being fitted to the vertical opening, so that the axle may be conveniently lubricated without removing the wheel.

For further information concerning this invention, address Mr. A. M. Levy, of No. 760 Myrtle Avenue, Brooklyn, N. Y.

AN IMPROVED PAD FOR HORSE COLLARS.

The collar shown herewith has a pad so attached that it supports the whole weight of the collar, and leaves a small air space between the pad and the top of the collar. The pad forms the subject of a patent recently issued to Mr. John S. Pope, of Madison, Lake County, Dakota Territory, and is made of a single piece of leather or other suitable material, perforated with small holes, stiffened at the back by narrow strips of sheet metal. The collar is suspended from the pad by straps and buckles on either side, the collar being




POPE'S PAD FOR HORSE COLLARS.

free to turn with the movement of the horse's shoulders without moving the pad, thus preventing the chafing and galling of the horse's neck so frequently caused by the ordinary form of collars.

A NUTSHELL CUTTER FOR CONFECTIONERS, BAKERS, ETC.

The accompanying illustration represents an effective device for cutting the shells of nuts, to release their kernels without bruising the meat, which has recently been patented by Mr. Charles Pecht, of No. 804 Red River Street, Austin, Texas. The nuts are placed successively in the metallic ring, which has a series of cutters extending inward radially, the cutters of one

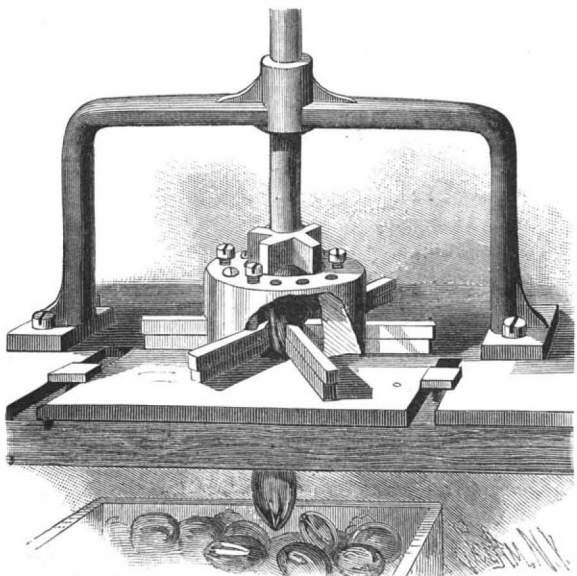


PECHT'S NUTSHELL CUTTER

series being set farther in the ring than the cutters of the other series, the nuts being pushed through between the cutters by a follower, which may be driven by hand or power. The cutters are set at the required distance apart for different sized nuts by a plug gauge, and clamped in their places by set screws. A number of these machines may be clamped side by side on a table, and fed through a system of perforated cylinders, so that a boy or girl can feed two or three machines without danger of crushing or maiming the fingers. By actual experiment it is stated that the shells have been cut on forty pounds of nuts by the machine in an hour, steam power being used, and by running it with a treadle, thirty pounds have thus had their shells cut in an hour.

AN IMPROVED CALF WEANER.

A simple, easily applied, and effective device to prevent a calf from drawing milk from its mother when the period for weaning arrives is shown in the accompanying illustration, and forms the subject of a patent recently issued to Mr. Robert L. Rickman, of Graham, Texas. The pendent plate is formed of galvanized iron or other light, yet strong and stiff, material, and is bent at an angle near the top to form an inclined portion, at the top edge of which is longitudinally attached a rod with projecting sharpened ends. Upon the plate are two arms, one rigidly attached and the other pivoted, the arms carrying buttons, adapted to fit on the sides of the cartilage of a calf's nostril, the buttons being lightly clamped thereon and the plate thus held in suspension over the mouth. The inclined portion of the plate does not permit the weaner to be thrown up over the nose, and the pointed rod pricks the mother when the calf comes in contact with her, thus effectually preventing the animal from drawing milk from the mother.

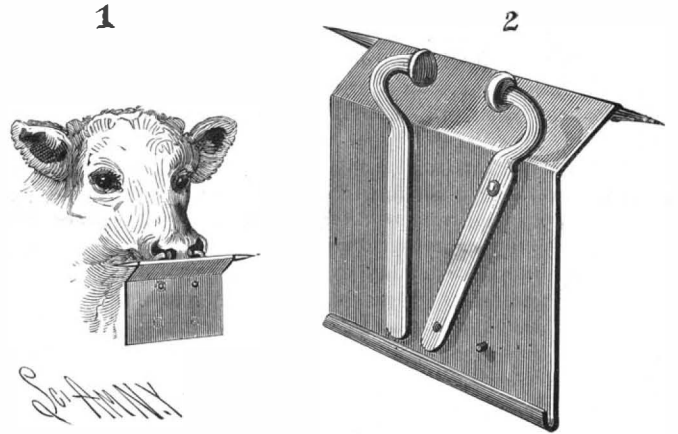

RICKMAN'S CALF WEANER.

Fast Steaming by Clyde-built Vessels.

Much of the ship building and engineering work which has recently been turned out exhibits the high qualities for which Clyde workmanship has long been famous. In support of this we might instance several cases of huge steamships notable for strength of structure and power of engines, *e. g.*, the magnificent P. & O. liner the Victoria, of 6,600 tons, built by Messrs. Caird & Co., and the belted cruiser for H. M. government, the Australia, built by Messrs. Napier & Sons; but there is more call to point to the number of "fastest passages on record" which different types of vessels of recent Clyde build have been achieving. Notable among these are the performances of the Queen Victoria and the Prince of Wales, the new paddle steamers on the Liverpool and Isle of Man service. On the trial trip of the latter vessel the speed attained was 24 1/4 knots, or 28 miles per hour, and on a steaming distance of 32 knots between Ailsa Craig and Cambric Light, which was accomplished in 1 hour 25 minutes, the average speed was 22.6 knots, or 26 miles an hour. The Prince of Wales is, therefore, entitled to be considered the fastest steamer in the world (exclusive of some recent torpedo boats), and only slightly better than her sister ship, Queen Victoria, which covered the distance between Tail-of-the-bank, Greenock, and Liverpool in 9 hours 23 minutes, steaming time, the mean speed being 22 1/4 knots per hour.

The race for supremacy in this important service has seemingly not yet been completed with the placing of these two craft on the route, as it is stated that the Isle of Man Steam Packet Company have asked the Barrow Shipbuilding Company if they can guarantee to produce a steamer to go at least 25 knots or the matter of 30 miles per hour. The reply to this, it is understood, has been made in the affirmative, and it will probably lead to an order. This, of course, means additional and still faster vessels of Clyde build in the future. The new steamer Meteor, built by Messrs. J. & G. Thomson for the London and Edinburgh Shipping Company, has accomplished the voyage between London and Leith—wharf to wharf—in 27 hours and 45 minutes, and from Gravesend in 25 hours 40 minutes, this being the fastest passage on record between the two places, a distance of 475 nautical miles. Of this steamer it is interesting to note that although exactly of the same form and dimensions as the Iona, the last crack vessel built for the company, she is about 5 per cent lighter in structure, owing to improvements in systems of construction. She is fitted with the now universal triple-compound engines, and the substitution of these for the ordinary double-compound type results in the engines developing 50 per cent more power with an addition in the weight of engines of only 16 per cent over the old system. The Iona, it may be added, which left London 1 hour and 50 minutes before the Meteor on the passage above alluded to, only reached Leith 5 minutes sooner than the latter vessel.

Another circumstance in which Clyde people justly take pride is the recent "breaking of the Atlantic record" by the Cunarder Umbria. This noble vessel recently made the run from Queenstown to Fire Island, New York, in 6 days 2 hours 37 minutes, the shortest

time on record. The best passage previously made was accomplished by her sister ship, the Etruria, in 6 days 5 hours 31 minutes to Sandy Hook, the latter being 35 miles, or equivalent to 1 1/4 hours further steaming than Fire Island.—*Marine Engineer.*


Removing Iodine Stains.

The *Repertoire de Pharmacie* describes a method of removing the disagreeable yellow stain produced upon the skin by the application of tincture of iodine, and which in ordinary cases remains for a considerable time. In the case of the hands, we are told, where the skin has become hardened, dilute ammonia, soda, charcoal, or common soap may be employed; but in treating women, whose skin is tender, and for those parts of the body, such as the face and neck, where the epidermis is not hardened by friction and exposure, it is preferable to employ the sulphite or bisulphite of soda, which are not irritating, and at once absorb the superfluous iodine to which the stain is due. The sul-

phite of soda has been used for this purpose in solution varying in strength from 1/10 to 1/100 in water. The liquid is penciled on to the place where the tincture of iodine has been applied, or used in compresses. In a few moments it will be found that the pain and irritation caused by the free iodine, as well as the disagreeable yellow stain, will have all totally disappeared, to the great satisfaction of the patient. As tincture of iodine is in daily use, and many persons are prevented from visiting or receiving visits for many days after an application of it, the little recipe above mentioned will prove frequently of great service.

AN IMPROVED CAR COUPLING.

The invention herewith illustrated, which forms the subject of a patent issued to Mr. Abraham G. W. Fos-

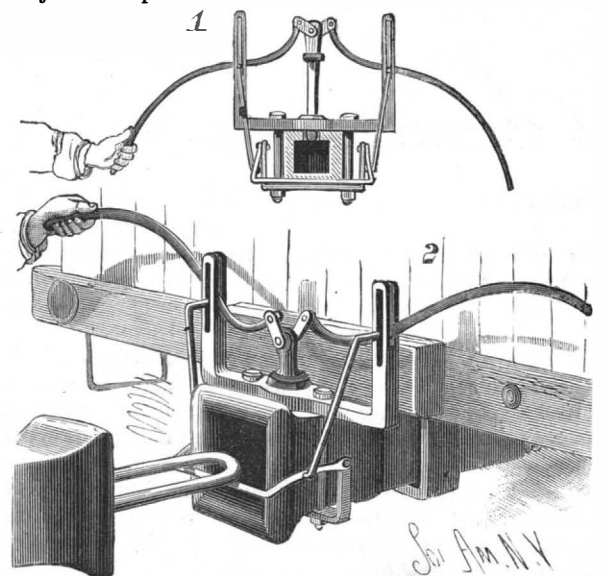

FOSTER'S CAR COUPLING.

ter, of Newnan, Ga., provides a coupling which may be operated from the sides of the car, and in which the link may, from the same point and with the same lever, be adjusted to enter an opposing drawhead of different height. Bolted to the top of the drawhead is a bar having upright arms, and with a central aperture registering with the pin aperture in the drawhead, the upright arms having vertical slots at right angles to each other, through which extend, sidewise, curved levers, pivoted through short connecting plates to the coupling pin. The curved levers are pivotally held in the side slots by connecting rods which pass through the front slots, extending thence forward and downward, where their ends are attached to a U-shaped guide bar for raising the coupler link, as shown in Fig. 2, the coupling pin being shown in raised position in Fig. 1. For use on passenger cars, a single arm will be all that is necessary, having its free end bent upward to extend above the car platform, instead of the two curved levers reaching to each side. For further particulars about this invention, address J. H. Shelnutt, Newnan, Ga.

IMPROVED TYPE COMPOSING AND DISTRIBUTING MACHINE.

(Continued from first page.)

ingenious treadle arrangement, N and O. Proof corrections are, of course, done in the ordinary way. The lever connections between the keyboard and the stops, which eject the various types from their respective slots, are indicated by F, J, G, H, and H'. They are necessarily complicated, but, according to the manufacturer, are not liable to get out of order. Their mode of working will be presently explained. In the general view, A B show the mechanism for causing the distributing cylinder to revolve. As in many other machines of this class, the control of the types is effected by forming on the side of each character recesses something like the wards of a key, the arrangement, of course, being different for each different character. Besides this, some very thin types, such as *l* and *i*, are formed with a nick at the bottom. The grooves on the cylinders are provided with projections corresponding to those on the types, so that no type will fall into any groove other than that it is intended for. This arrangement applies only to the cylinder, C'', which does not revolve. The grooves in the distributing cylinder, C, are large enough to receive all the types indifferently that are fed into them.

The work of distribution is effected as follows: A suitable attachment to the side of the cylinder, C, enables the operator to place the galley containing the type to be distributed in contact with the cylinder, and by a very simple device line after line of type is fed into the cylinder until, if desired, every groove is nearly filled. Weights are then introduced into the grooves above the type to keep the latter steady, and the upper cylinder is caused to revolve upon the lower one with which it is in contact. As the columns of mixed type pass over the heads of the shaped grooves of the lower cylinder, letter by letter falls into its proper groove as soon as the nicks in the type find their corresponding wards. In this way, and at a speed depending on the rate at which the cylinder, C, is driven, the types are all distributed ready for the work of the compositor.

The details on this page, while not representing exactly the arrangement of the mechanism of the Thorne machine shown at the American Exhibition, will give a clear idea of the principles upon which its action depends.


Fig. 1 is a diagram plan of the stationary type case, showing a sufficient number of grooves to illustrate the principle. These grooves or channels, 2, are so formed in the type case as to be open at their upper ends, and they are closed at their bottom ends by means of the base, 20, Fig. 3, which forms a rest for the type lying in the channels. These channels are all furnished on one side with one or more wards, 8, which are variously arranged so as to correspond with nicks made in the types as already said.

The type conveying mechanism consists of a type carrying table, 30, the surface of which lies in the same horizontal plane as that occupied by the bottoms of the type channels formed by the base, 20. It is mounted so as to revolve with the center of the type case for its center of movement, and thus is adapted to receive type from the channels, 2, upon its surface and carry the same around with it in its circular path of travel.

A circular vertical guard, 21, forms the outward limit to which the types may be projected. This guard is attached to the base, 20, so as to project above the face of the table, 30, to a height at least equal to the thickness of the largest type used in the machine, and this vertical guard is supplemented by a horizontal guard, 22, which projects inwardly and nearly covers the type race that is formed by the type case, the table, and the vertical guard.

The lower end of the type case is furnished with guards covering the space between the type channels that prevent type in process of composition from becoming jammed between the guard, 21, and the type case, as will be explained further on.

The type case, C, and the mechanism and devices sustained by it are supported by a central shaft, 31, mounted in a stand, 61, and by the framework that carries the keys and the side plates, 62, 63.

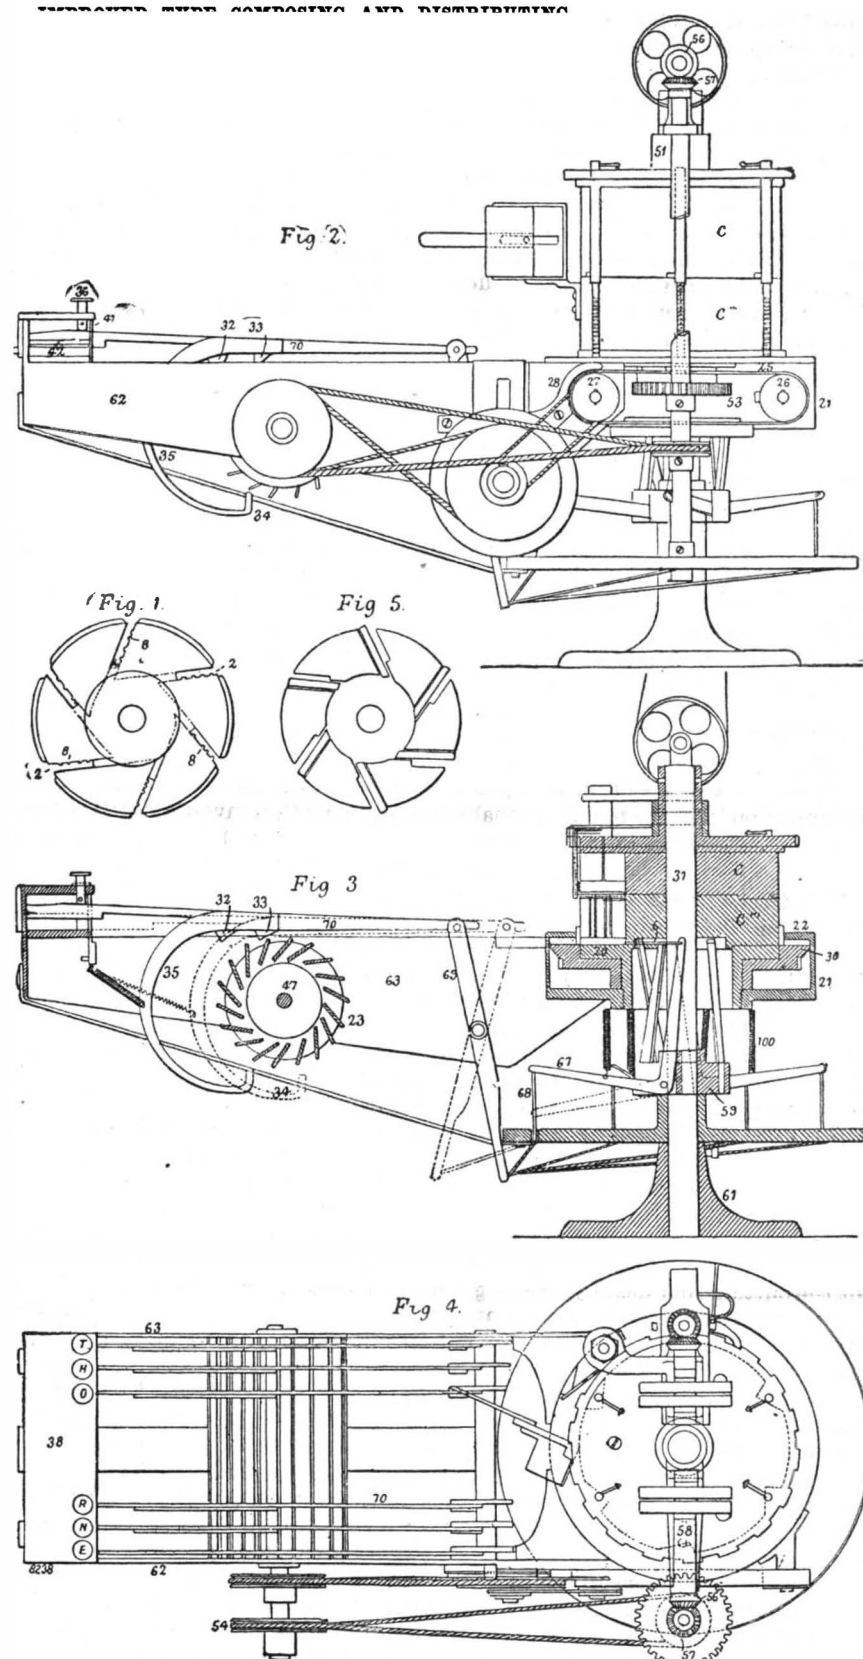

The means for revolving the type carrying table, 30, is a vertical shaft, 51, at one side of the machine, which carries a spur wheel, 53, that engages the toothed perimeter of the table, 30. This shaft is driven by means of bevel gears, 56, 57, from a cross shaft, 58, mounted above the machine, and supplied with driving and loose pulleys.

The type ejecting mechanism is constructed as follows: Each type channel of the type case, C, is provided with a type ejector, 6, each of such ejectors consisting of a flat plate of metal of a width adapted to that of the type channels, and of a thickness less than that of the type it is to operate upon. The faces of these ejectors are beveled and are carried at the ends of bell crank levers, 67, that are pivoted in recesses of a fixed hub, 59, and held normally in the positions shown in Figs. 2 and 3 by springs, 100, the movement of which bell cranks causes the ejectors to reciprocate horizontally in the bottom ends of the type channels, and during each forward movement to push the lowermost type out of a channel on to the revolving type carrying table, and during each rearward movement to clear the channel, so that the types remaining therein may fall.

The bell cranks, 67, are attached by means of cords, 68, to the lower ends of rocking levers, 69, to the upper ends of which latter the key bars, 70, are pivoted. These key bars are provided with tappets, 32, 33, attached to their bodies so as to be above the plates, 23, of a rotating type bar driver, and with a tappet, 34, that is carried by a curved arm, 35, so as to be below the plates, 23, of the same type bar driver.

This type bar driver consists of suitable heads attached to a carrying shaft, 47, and provided with a number of angularly arranged plates, 23, and it is constantly rotated by means of a pulley, 54. The key bars are capable of being moved vertically as well as horizontally, and when carried downward their tappet, 32,

will be engaged by one of the revolving plates, 23, which will thus move the depressed key bar forward and carry its tappets, 33 and 34, into their foremost position. When the key bar is thrown so far forward that the plate, 23, which propelled it passes off from the tappet, 23, it will have brought its rear face engaged by another of the plates, 23, which plate, in moving over the inclined rear face of said tappet, 33, presses the same upward and raises the key bar to which it is attached, thus lifting the tappet, 34, high enough to be engaged by one of the plates, 23, which will then, by means of the arm, 35, carry the type bar back to its rearward position, when it will be held by its sustaining spring in the raised position shown in Fig. 3.

Each of these key bars has its front end guided in a vertical slot in the plate, 41, and the division plate, 42, of the key board frame, and it carries at its front end a small cross stud that will pass through a slot at the front end of the division plate, 42, when the key bar is pressed downward and forms a riding guide bearing against the under side of the division plate, 42, as the key bar is carried inward. At its rear end this division plate has another slot that permits the upward passage of the stud, 43, and consequently allows the key bar to rise at the end of its rearward stroke, so that it may be moved forward with its stud, 43, riding upon the top of said division plate.

Each key bar is surmounted by a key, 36, which keys are held in vertical guide slots in the top plate, 38, of the key board frame, and so as to rest upon the upper surface of the key bars. When a key is depressed, it forces a key bar downward, thus bringing its tappet, 32, into a position to be engaged by one of the plates, 23, the slot in the front end of the division plate causing the stud, 43, not to obstruct such movement. When a key bar, 70, is thus moved downward, a plate, 23, engages its tappet, 32, and forces the bar rearward by a positive movement. The stud, 43, then bears against the under face of the division plate, 42, and with it acting as a guide, holding the key down, the tappet, 32, is in engagement with the said plate. The rearward or inward movement of the key bar moves the lever, 69, and rocks the bell crank, 67, the latter forcing a type ejector, 6, outward, and causing

it to expel a type from its type channel. The type thus ejected is received upon the rotating carrying table, 30, and is carried around with its face foremost until it reaches the throat, 3, through which it is propelled on to a type conveying belt, 25, running over pulleys, 26, 27, which is arranged to travel with its edge in the same plane as that of the table, 30. This belt travels at a speed slower than that of the carrying table, and conveys the type to an inclined guiding chute, 28, whence it is conveyed to the line forming mechanism with a momentum that will not cause its face to be injured.

The detailed figure illustrates the type distributing mechanism, which is very simple and has already been sufficiently described.

From the foregoing description the great ingenuity of this machine will be evident. It appears to have been very successfully introduced in the United States, where its capacity for setting and distributing is equal to 12,000 ens per hour. The machine is made by the Thorne Machine Company, Hartford, Conn.

We are indebted to *Engineering* for our engravings and the foregoing particulars.

Fluoride of Nitrogen.

The supposed compound was formed by passing an electric current from seven ferric chloride batteries through a concentrated solution of ammonium fluoride. After the lapse of a short time, several drops, of oily consistence, were observed attached to the negative plate. On becoming connected with the positive, a thin gold wire, these drops exploded with violence. The compound is undoubtedly highly unstable, being at once decomposed in contact with glass, silica, or organic matter, thus rendering the analysis of the same one of considerable risk. Its explosive violence is even greater than the chloride of nitrogen, and it is also prone to spontaneous decomposition.—*Chem. News.*

Gymnastics at School.

The honorary secretary of the National Physical Recreation Society gave some interesting evidence lately before the Royal Commission on Elementary Education, and it had the advantage over much of the other matter collected by that body of being statistical in large measure. Speaking of the work done by the Liverpool Gymnasium for the treatment of spinal curvature, he stated that some 3,000 cases had come under his own observation there, of which 2,500 were cases of children between the ages of eight and fourteen years, 2,000 of these being girls. There can be no doubt, we think, that deficient physical exercise, if not the only or even perhaps chief cause of this very common deformity, is highly calculated to promote it; and, even apart from any specific evil, a well-considered and systematized plan of training for the muscles is undoubtedly a most valuable regimen, and eminently adapted to preserve and benefit the general health. But it is of the highest importance, in following out this object, to avoid pernicious exercises, which may do irreparable mischief to the growing organs and unbraced body of a child. The following instance is very much in point: "The caretaker commanded them all (like children of an elementary school) to keep their knees stiff and touch their toes with their hands, and while he kept them in that position he proceeded to give them an impromptu discourse upon the benefit of physical training. When the children rose up you could tell from the hectic color of their cheeks that they were evidently suffering at that moment from palpitation of the heart caused by leaning down in this extraordinary position." Equally sound appears to us the following comparison between the horizontal and the parallel bars: "In the case of the horizontal bar, or anything pendent, children naturally jump up and get on with their hands together; that is a position of contraction; the chest is contracted and the shoulders brought forward, unless they have a very painstaking instructor, who will make them widen out their hands and change frequently. In the case of the parallel bars, the ordinary position of a child upon it causes expansion of the chest; the very movement of resting upon the parallel bars is one of expansion, without any teaching whatever."—*Lancet*.

Does Labor Produce All the Wealth?

Rev. Dr. G. M. Steele, in *Work and Wages*: "Is it really true that 'labor produces all the wealth of the world'? Of course, by labor here is meant the putting forth of physical energy, otherwise the succeeding sentences have no meaning. Does any one who thinks at all about the subject believe that the great factories, the docks, the vast buildings of stone and brick and iron in our great cities, the railroads, the mighty steamships, the complicated machines and innumerable other structures are the result of manual labor alone? Suppose there is a line of railway fifty miles in length to be built, and five thousand steady, intelligent, and reliable laborers are told to go and build it. Will they be able to build the bridges, to make the deep cuts, to construct the causeways through treacherous swamps, to calculate the grades, and do other equally difficult parts of the work? How many ordinary wage laborers would it take to produce a Corliss engine, the first of its kind? No; there must be much besides muscular effort in order to attain these results. There must be toil of brain, long and protracted, and often exhausting thought, sometimes accompanied by great sacrifices and great hardships. In order to extensive production there are required great mental qualities, some of them of a rare kind. There is needed power to contrive, to invent, to organize, to direct, or little can be achieved. The man who blows the organ might claim that he produces all the music of the instrument. It is true he is generally an essential condition, but not by any means the only or the most essential condition. No more is manual labor the only or the most essential condition of the production of great wealth."

A Long Tramway.

The longest street tramway in the world will be that which is to connect a number of towns near Buenos Ayres, South America, and which will have a total length of 200 miles. The road will also be exceptional in that sleeping cars will be run upon it for the comfort of the passengers. Horses will be employed as a motive power instead of steam, because horses are cheap, fuel is dear, and the people are slow. The price of two tons of coal will buy a horse with its harness. The sleeping cars and all the other equipments of the line are being supplied by a Philadelphia company, and these cars are stated to be curiosities. They are four in number, 18 feet in length, and are furnished with four berths each, which are made to roll up when not in use. The cars are furnished with lavatories, water coolers, linen presses, and other conveniences, and are finished throughout with mahogany. The other rolling stock comprises four double-decked open cars, twenty platform cars, twenty gondola cars, six refrigerator cars, four poultry cars, furnished with coops, eight cattle cars, two derrick cars for lifting heavy material, and two hundred box cars.

Carriers of Contagion.

Flies, aside from being pests, are actual conveyers of contagion. The fly can communicate virus from an open sore, and can carry this from one person or place to another. This may not be credited, but it has been proved by direct experiment to be not only possible, but an actual fact. The common house fly, by lighting on a diseased spot, either in an animal or a man, and thence passing to a healthy subject, has been known to impart the infection to the latter. Whether the poisonous matter be an animal virus or a germ of disease, a bacillus, does not matter; and in this connection it is well to speak of other common methods of possible disease infection. A postage stamp may in various ways convey contagion. One of the simplest and most plausible is that in which a postage stamp, partially attached to a letter to pay return postage, is sent by a person infected with some disease to another person. The disease is transferred, in the first place, to the adhesive stamp through the saliva, and in being attached to the letter by the receiver the poison may be transmitted to him in turn through the saliva.

Another cause may be the infection of the stamp with disease germs. The stamp, having been exposed in a room where a diseased person lies, may become slightly moistened and thus retain the germ. That this is true can be proved very simply by a microscopical examination. It is even possible that an active and tangible poison, as arsenic, may accidentally or intentionally be attached.

We often see a person holding change for a moment in the mouth, probably not knowing that investigation has shown that disease germs can be carried by money. If one could see through what hands the money has passed, they would hesitate before using such a third hand. Silver money is as bad as paper money; but while many would hesitate to hold a dirty bank note in their mouth, they think that a silver piece, because bright, is apparently clean.

Cigars may convey contagion, especially syphilis. We have seen a note in which a physician gave as an excuse for not loaning a light to a friend, that he was afraid of contagion; but if he was so afraid he should have been consistent and refused to smoke the cigar. Cigar wrappers are in the cigar factories, especially in Cuba, moistened with the lips and tongue, and the girls who roll the wrappers are by no means of the highest reputation. Disease can be carried in this way. Tobacco, contrary to the common belief, does not destroy disease germs, and smoking will not confer immunity from contagion.

Any one who uses a towel in common with the public, or a piece of soap, or brush and comb, or any requisite of the toilet, runs the risk of possible infection. The subject of antiseptics, simply another word for cleanliness, has not necessarily brought to light many new facts, but has set people to thinking of old ones. The germ theory of disease is to most people a very vague one. There is a general idea that disease is carried by germs, and that the air is filled with these, and it is a wonder to most people that every one is not so afflicted, the laity conclude that the germ theory is an absurdity and a contradiction. They do not consider the element of a fertile soil. The germ is the same as a seed, and all organic bodies are reproduced by a seed. We must plant seed in a soil suitable for it, and the surroundings—heat and moisture—must be adapted to it if it is to grow. As we descend in the scale of organic life, we find that some of the lower animals can hardly be distinguished from plants, and these are reproduced not by seed, but by a process of division or budding. A part of the animal is divided and separated, and forms a new animal.

As we descend in the scale, we find that instead of seeds we have spores, as in ferns; but these serve the purpose of seeds, and demand a fertile soil before they can grow. Of many million spores, but one or two may serve their purpose; the rest die without giving any result. As we descend still lower, we find that fungi and moulds need not only a fertile soil, but a peculiar soil, and many of them will not grow except in or on another organic body.

In medicine, a common example is the ergot of rye. Another is corn smut. These, in addition to requiring a peculiar soil, undergo an "alternation of generation." For example, corn smut is first reproduced on the barley leaf as "rust," and this rust in turn produces corn smut. The theory of disease germs is founded on the knowledge of the actions of the lower animals and plants. The bacillus may be an animal or it may be a plant, poisonous in itself or simply a carrier of contagion. It may even be a result of disease, and have nothing to do with its cause except as a foreign body. Still as we find it present, and find it always present, we are necessarily induced to believe that it is an active agent, but in order to reproduce itself it must have a fertile soil. This it finds, as a rule, in a person whose constitution is run down from overwork, lack of rest, poor living, or disease. It may be introduced into the system, directly into the blood, through an open wound, thus inducing septicaemia, a state of poisoned blood, or it may be introduced indirectly into the blood through the alimentary system. In this case it must

be inhaled or eaten with food. In either case it is absorbed, or perhaps actively works itself through the mucous membrane. Once in the blood, the bacillus grows, as a rule, by division, and multiplies to an enormous extent. Disease may also be carried by a virus, which may in turn consist of bacilli or of organic putrefactive matter. The common example of this is the virus of cow pox or of a snake, an actual poison.

Either of these factors may be present on a piece of soap or money, or a soiled towel, or a book that has been in constant use, in fact, any article that has been handled by a number of people; and we can perhaps realize how omnipresent disease germs are, when we consider that washing our hands in an antiseptic solution, and wiping them on a perfectly clean antiseptic towel, we shall find they are still, scientifically speaking, unclean. Cleanliness, then, is above all to be inculcated as a preventive of disease. If not next to godliness, it is surely next to health.—*M. T. E., Technics*.

Ball Lightning.

At the recent meeting of the Royal Meteorological Society, June 15, the following papers were read:

"Note on a Display of Globular Lightning, at Ringstead Bay, Dorset, on August 17, 1876," by Mr. H. S. Eaton, M.A. Between 4 and 5 P. M. two ladies who were out on the cliff saw, surrounding them on all sides and extending from a few inches above the surface to two or three feet overhead, numerous globes of light, the size of billiard balls, moving independently and vertically up and down, sometimes within a few inches of the observers, but always eluding the grasp. Now gliding slowly upward two or three feet, and as slowly falling again, resembling in their movements soap bubbles floating in the air. The balls were all aglow, but not dazzling, with a soft superb iridescence, rich and warm of hue, and each of variable tints, their charming colors heightening the extreme beauty of the scene. The subdued magnificence of this fascinating spectacle is described as baffling description. Their numbers were continually fluctuating. At one time thousands of them enveloped the observers, and a few minutes afterward the numbers would dwindle to perhaps as few as twenty, but soon they would be swarming again as numerous as ever. Not the slightest noise accompanied this display.

"Ball Lightning seen during a Thunderstorm on July 11, 1874," by Dr. J. W. Tripe. During this thunder storm the author saw a ball of fire of a pale yellow color rise from behind some houses, at first slowly, apparently about as fast as a cricket ball thrown into the air, then rapidly increasing its rate of motion until it reached an elevation of about 30°, when it started off so rapidly as to form a continuous line of light, proceeding first east, then west, rising all the time. After describing several zigzags, it disappeared in a large black cloud to the west, from which flashes of lightning had come. In about three minutes another ball ascended, and in about five minutes afterward a third, both behaving as the first, and disappearing in the same cloud.


"Appearance of Air Bubbles at Remenham, Berkshire, January, 1871," by Rev. A. Bonney. Between 11 and 12 A. M., a group of air bubbles, of the shape and apparent size of the colored India-rubber balls that are carried about the streets, were seen to rise from the center of a level space of snow within view of the house. The bubbles rose to a considerable height, and then began to move up and down within a limited area, and at equal distances from each other, some ascending, others descending. These lasted about two minutes, at the end of which they were borne away by a current of air toward the east, and disappeared. Another group rose from the same spot, to the same height with precisely the same movements, and disappeared in the same direction, after the same manner.

Mr. H. C. Russell, F.R.S., of Sydney, described a fall of red rain which occurred in New South Wales, and exhibited, under the microscope, specimens of the deposit collected in the rain gauges.


Simple Method of Artificial Respiration.

In the *Brit. Med. Jour. (London Med. Record)*, Mr. J. A. Francis describes a simple method of artificial respiration which, he alleges, combines all the advantages of the Marshall Hall, Sylvester, and Howard methods, without any of their disadvantages. The plan is as follows:


The body of the patient is laid on the back, with clothes loosened, and the mouth and nose wiped. Two bystanders pass their right hands under the body at the level of the waist, and grasp each other's hands, then raise the body until the tips of the fingers and the toes of the subject alone touch the ground; count fifteen rapidly; then lower the body flat to the ground, and press the elbows to the sides hard; count fifteen again; then raise the body again for the same length of time; and so on, alternately raising and lowering. The head, arms, and legs are to be allowed to dangle down quite freely when the body is raised. The author alleges that this method is most successful, and it is so simple that any one can perform it without any teaching.

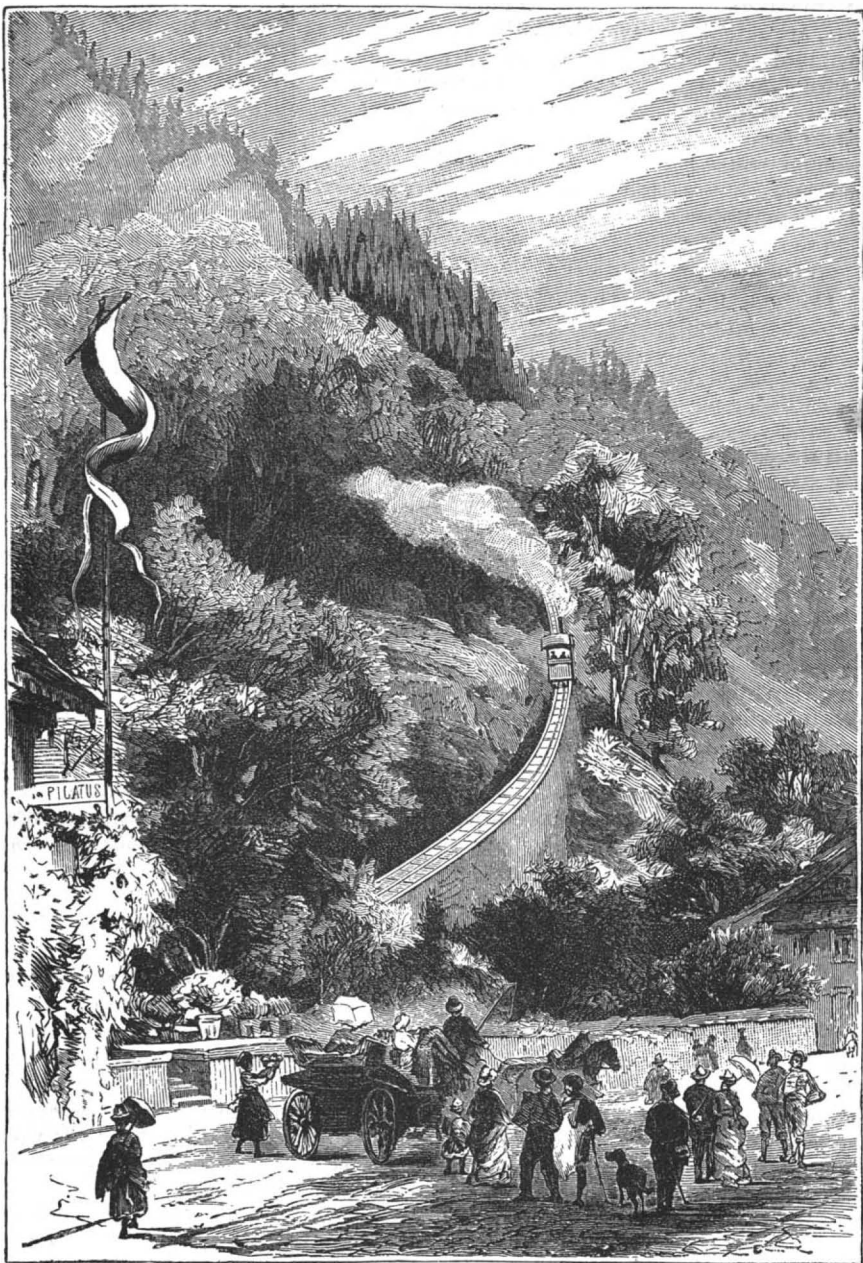

THE STARTING PLACE.

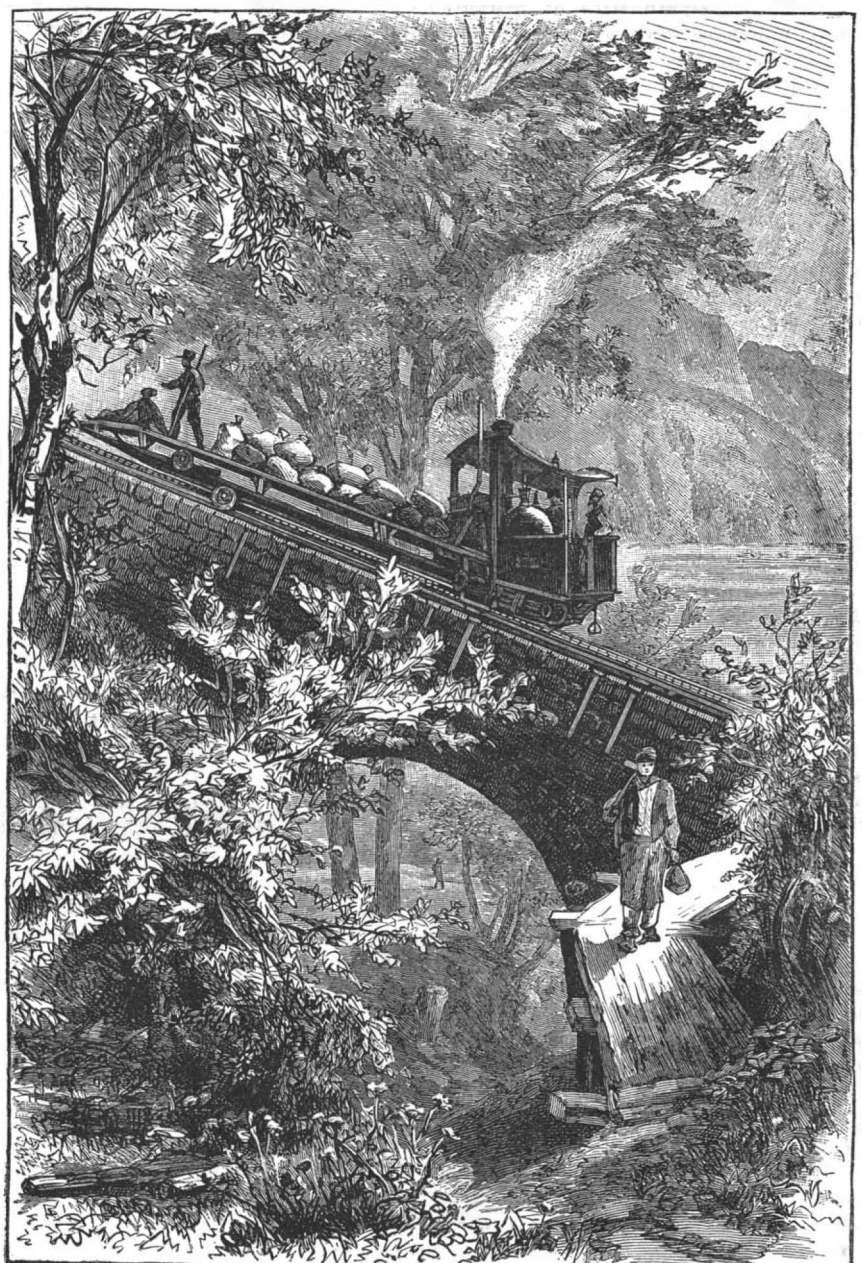

LOCOMOTIVE AND FREIGHT TRUCK.

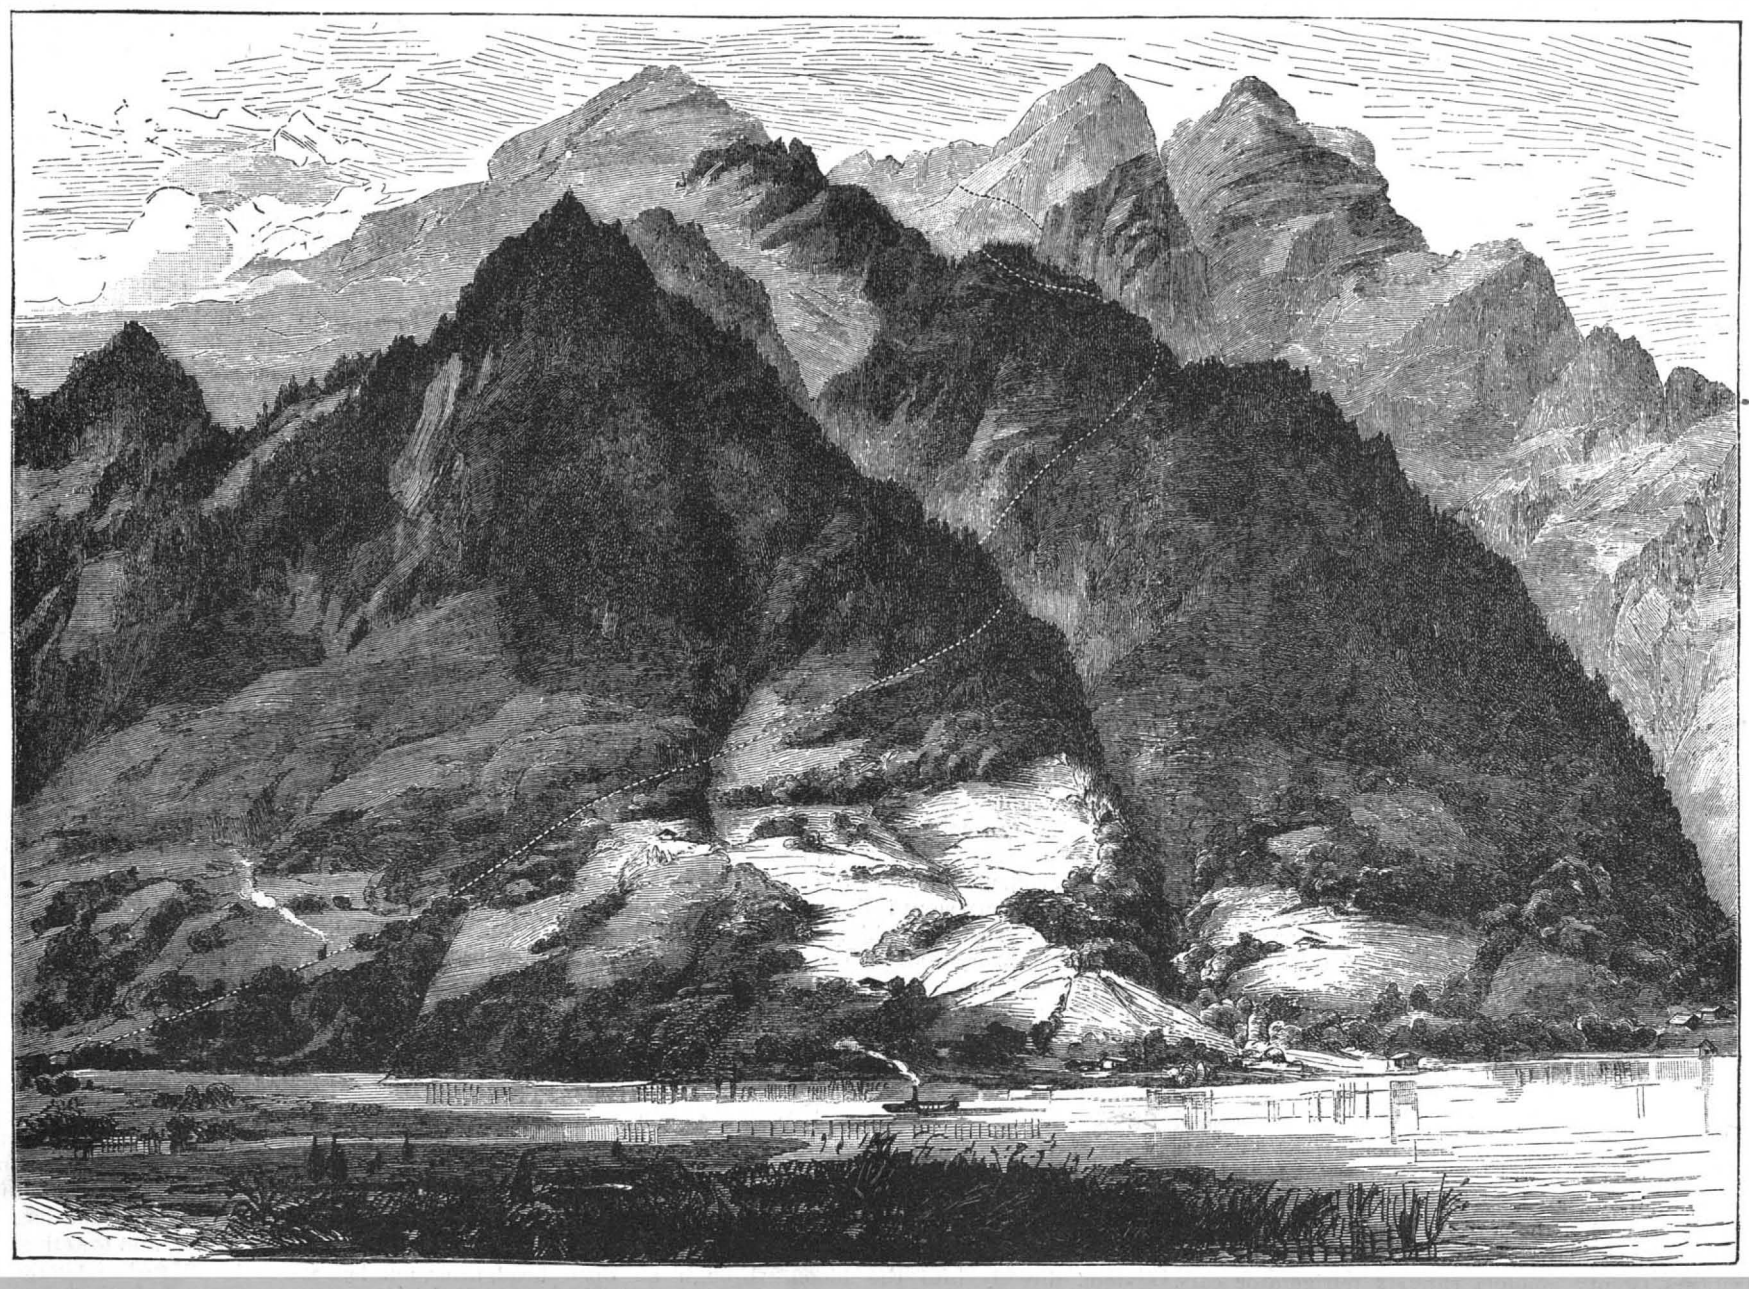

GENERAL VIEW OF THE ROUTE OF THE MOUNT PILATUS RAILWAY.
[The dotted lines indicate the track of the railway.]

THE RAILROAD ON MT. PILATUS.

If the Rigi railroad is worthy of being considered an extraordinary and wonderful piece of work, the latest undertaking of this kind—the building of the railroad on Mt. Pilatus—certainly ought to attract the attention of engineers and of the traveling public. This new road differs essentially from its older rivals in the construction of its roadbed, as well as of the rolling stock. The ruggedness and steepness of the mountain, together with its great height (6,882 feet, against 5,905 in the case of Rigi), offered much greater obstacles than the roads previously built, and required an entirely different system.

The restless spirit of man is always glad to set for itself some new task, and consequently men were found who, equipped with the necessary capital, were willing and able to carry out this tremendous undertaking. When a portion of the road had been completed, all fear in regard to strength and safety were removed, for it was thoroughly tested every day, the locomotives going as often as was necessary to that part of the road on which they were at work, carrying materials of all kinds, weighing from 20,000 to 22,000 pounds.

The southeastern side of the mountain was chosen for the road, which begins at Alpnach-Stad, between the Hotel Pilatus and the Eagle Hotel (1,448 feet above the level of the sea). From there it climbs in a northerly direction to the Aemsigenalp, then westward to the Mattalp (5,315 feet above the sea), and after much winding reaches the plateau of the Hotel Bellevue on Mt. Pilatus (6,811 feet above the sea).

The road is about $2\frac{3}{4}$ miles long, and the total height climbed from the shore of Alpnach Bay to the Hotel Bellevue is 5,360 feet. The grade is from 18 to 48 per cent, which is scarcely exceeded by any rope road. In the middle of the line, at Alp Aemsigen, there is a switch. Seven thousand two hundred and sixty-seven feet of the entire road consists of straight stretches, curves, with radii of from 262 feet to 328 feet, constituting the remainder. The road includes a viaduct, three short tunnels and one long one. The width of the track is 2 feet 7 inches. The foundation consists of a wall covered with plates of granite and loose material, and on this the superstructure is firmly anchored.


The toothed bar—which is placed midway between the rails and is somewhat higher than the latter—consists of soft steel, and is provided with a double row of vertical teeth, which are milled out of the bar. The cogged wheels on the cars, which engage the toothed bar, are arranged in pairs at the right and left of the same. The axles of these cog wheels are not horizontal with the level of the road, as in the Rigi system, but perpendicular to the same, this arrangement making it impossible for the cog wheels to become displaced.

The locomotive and cars form a train with two running axles and four cog wheels engaging the toothed bar. The boiler and engine are behind or below the

Locher, of the firm of Locher & Co., in Zurich, under whose supervision and control the road has been built. The engine was invented by mechanical engineer Haas, and engineer Hensler, who has had much experience in the construction of railroads, undertook to act as the representative of Messrs. Locher.—*Illustrirte Zeitung*.

NOVEL LANTERN SLIDE.

The engraving shows an inexpensive and very simple and effective device for exhibiting the action of the circulating fountain upon a screen. It consists of a glass tube of small diameter bent into the form of a volute, with the inner end of the tube extended laterally, and

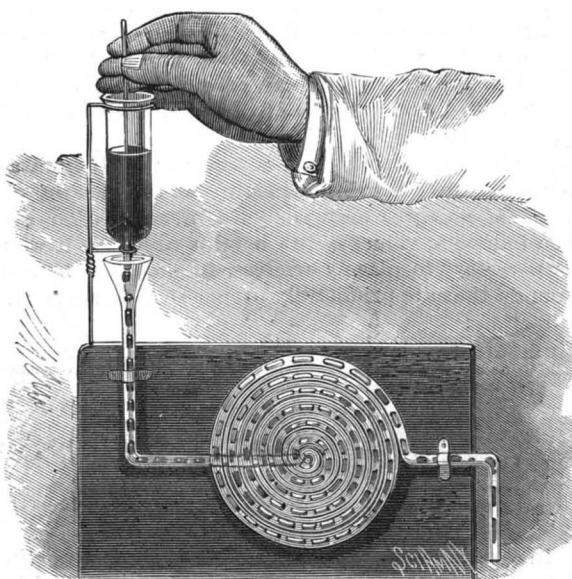

CIRCULATING FOUNTAIN FOR PROJECTION.

then bent vertically and provided with a funnel at the upper extremity. The tube at the outer end of the spiral is bent outward radially, then downward at right angles. The tube thus bent is mounted on a board having a circular aperture a little larger than the spiral, so that the entire spiral may be strongly illuminated while the ends of the tube leading to and from the spiral are concealed by the board.

Above the funnel is supported a reservoir with a fine ajutage, the reservoir being provided with a pointed wooden rod which extends down into tube at the lower end and forms a valve for regulating the flow of liquid.

The liquid employed is water to which has been added some coloring matter, such as aniline blue, red, or green. A few drops of aniline red ink answers for this purpose.

The flow of the liquid is started by loosening the valve, so that the water drops regularly into the funnel of the tube below. The drops should fall so as to

diameter, and the spiral is three and one-half inches in diameter.

When the fountain is in operation, the material of the spiral appears to revolve, but each convolution at a different rate of speed, owing to its increasing diameter. When projected with a good lantern and a strong light, it becomes a very interesting object.

G. M. H.

SUSPENSION FOOT BRIDGE.

An instance of the practical work done by amateurs in mechanics is furnished by the suspension bridge which has been erected at Oak Park, Ill., and which we illustrate in the accompanying engraving. The bridge is very light, and is intended solely for the use of foot passengers, and it is suspended from a large double elm tree on one side of the river, while a tower has been erected as a pier on the other bank, which is a rather high bluff. The cables at this end, however, are carried to an oak tree, where they are anchored at the ground.


Mr. Leo G. Haase, who sent us the photograph, says in his letter that "the bridge was built by amateur mechanics, with no other knowledge of bridge building than that gained by observation and constant and thorough reading of the SCIENTIFIC AMERICAN. The builders were young men, just in their twenties."

The bridge extends over the river Displaimes, with a span of 125 feet in the clear. The distance from the tree pier to the concrete anchorage is 75 feet clear, and the distance on the other bank between the tower and the tree anchor is 50 feet. The total length, therefore, is over 225 feet. It weighs but 2,750 pounds, and has been tested by placing fifteen men thereon. There are four five-eighths inch cables, but only two carry the load, the other two forming an auxiliary support in case of accident to the main cables.

The passenger way is narrow, the floor being about 3 or 4 feet wide, and passing directly between the two trunks of the tree through which the cables are passed. The height of the floor at the tree is about 10 feet. The flooring is built of planks 1 inch by 6 inches, laid 1 inch apart, on account of snow, on longitudinal stringers, 2 inches by 4 inches. These are supported by 1 inch gas pipe, hammered flat at the ends. One-half inch pipes are used at the middle of the bridge. The bottom ends are bolted to the stringers, and upper ends are provided with small wooden blocks clamped by two three-eighths inch bolts, and a space being left in the blocks for the passage of the cables. The bridge was built in the winter time, in order that a scaffolding could be erected on the ice on the river to facilitate the construction. The bridge is considered quite a curiosity, and many thousands cross it every year.

Brown Reins or Saddle Leather.

Unstained leather may be colored a fine chestnut

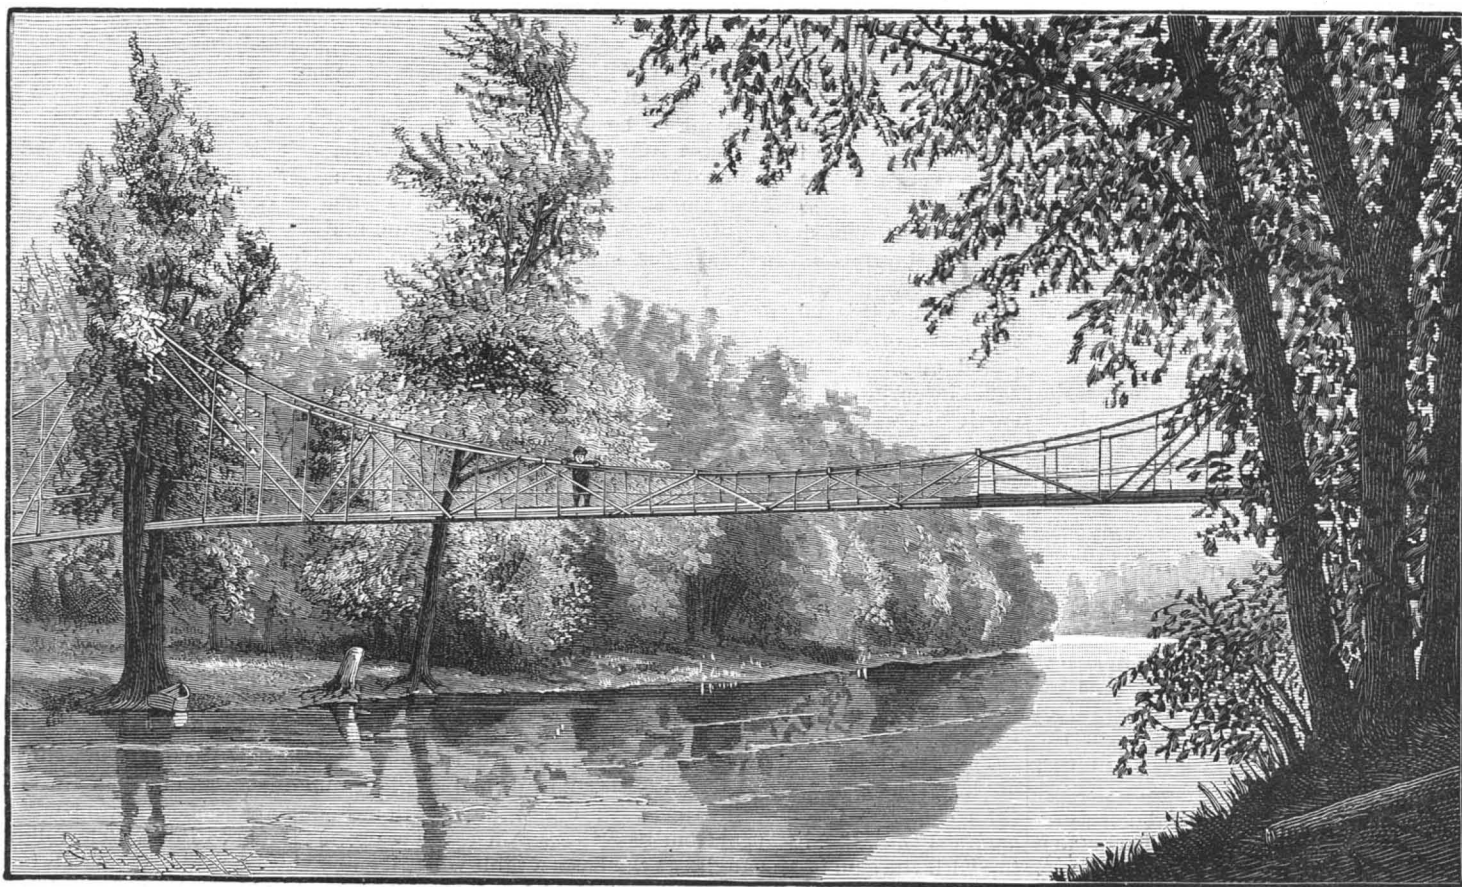

A CURIOUS SUSPENSION BRIDGE NEAR CHICAGO, ILL.

cars, which latter accommodate thirty-two passengers. Brakes can be applied to all of the cog wheels, and besides this there are two clamps at the upper running axle which clutch the head of the rail, thus preventing the upsetting of the cars by the wind. The weight of the loaded cars is about 21,000 pounds, and one trip up or down can be made in about 80 minutes.

The idea of the Pilatus road originated with Edward

include air spaces between them. The liquid, as it issues from the downwardly turned end of the spiral, is received in a cup, by which it may be returned to the reservoir to be used again.

When it is desired to accelerate the motion of the liquid in the tube, a short rubber pipe is connected with the downwardly turned end of the glass tube.

The glass tube is about one-sixteenth inch internal

brown by treating it daily for a week or more with a solution of pine and alder barks. The bark is leached with rain water, using, by bulk, ten times as much water as ground bark, returning the water to the leach until all the coloring matter is extracted from the bark. The leather is then laid into the water, and allowed to remain until wet, then hung up to dry. By repeating the process three or four times, a fine color is secured.

An Insect Destroyer of Boots and Shoes.

In the last report of the Commissioner of Agriculture, Professor C. V. Riley states that the beetle known to science as *Dermestes vulpinus*, and, in its larval state, to tanners as the "dry hide worm," came under his observation in 1884, for the first time, as a destroyer of boots and shoes. The insect was first noticed in the establishment of a wholesale manufacturer in St. Louis, in the spring of 1884, when a lot of boots and shoes which had been shipped to some Southern town were returned condemned as "wormy." This led to an examination of the stock in store, and the proprietor found, to his astonishment, that there was justice in the complaints of his customer, and that several boxes of heavy boots and shoes which had been packed for some time were literally swarming with the insect in all stages of development. This was the first time that he had ever known of the existence of such a pest.

About the same time, the insects were found in numerous leather houses throughout the same city, and invaded the manufactories. In the summer of 1885, public attention was called to the pest by various oral and exaggerated accounts of the "grub" that worked unseen in the soles of shoes, reducing them to mere shells, which crushed into fragments when subjected to the pressure of the foot in wearing.

Another case of the destructive action of this same beetle was brought to Professor Riley's attention at about the same time by Mr. F. Eisenstein, of A. Eisenstein's Sons, of Savannah, Ga., whose firm had instituted a lawsuit against the Boston & Savannah Steamship Company, by reason of damages done by the insect to boots while in transit from Savannah to Boston.

In the St. Louis cases, none of the dealers was able to trace the introduction of the insect from any particular warehouse or tannery, but learned from tanners that it was quite common in old hides.

In the warehouses and manufactories the insect still retained its partiality for undressed leathers, and an examination at once shows that the soles and heels of boots and shoes are more liable to injury than the uppers. It seems probable that the comparative immunity of the uppers is due to the oily dressing used in the finishing processes. They do not, however, entirely escape, for they are occasionally found bored by the larva or roughened and eroded by the beetle.

The work of the larvæ, both young and full grown, consists in boring smooth, round channels in every direction through the leather, preferring, as above stated, the soles and heels. A favorite place for entering the shoe is in the angle between the sole and heel, or in the crevice between the upper and the sole, a crack of some kind seeming to be necessary to enable them to get sufficient purchase to begin boring.

The principal occupation of the adult beetle is the propagation of the species, yet it also is a leather destroyer, gnawing and scoring the surface of the boot or shoe, but not burrowing bodily into its substance.

Professor Riley states that when the insect has already made an entrance into cases of boots and shoes, it will not be a difficult matter to destroy it by a proper use of bisulphide of carbon. Of course, it would be preferable to overhaul the contents of each box thoroughly, and to treat the boots in which the insect is found with benzine or some other efficacious insecticide; but, where this cannot be done without too great expense, it will probably suffice to open each case and place an open saucer of the bisulphide on top of the contents. The liquid will volatilize, and the vapor will sink down through the mass, if the box be tight, and will kill the insects in their burrows.

As the natural home of the insect is in hides, it devolves upon transportation companies that carry both made-up leather goods and hides to exercise some degree of care and cleanliness, as they are otherwise liable to lay themselves open to damages payable to the owners of the more expensive goods.

The Mirage of Sound.

Mr. H. Fizeau has just presented a very interesting note to the French Academy of Sciences, on the mirage of sound. The attention of this learned physicist was attracted to this subject by the recent collisions between ships which presented the greatest guarantees of security, and were provided especially with the powerful sonorous apparatus now generally in use, such as sirens, steam whistles, etc.

Under the influence of variations in temperature, the propagation of sonorous waves may give rise to a sort of *mirage of sound*, entirely analogous to the well known phenomena of light, and which results from a more rapid propagation in the less dense strata.

If, then, we suppose that, under certain circumstances, the sea is hotter at its surface than the neighboring strata of air, the latter in fair weather must, in the vicinity of the warmer water, take on an arrangement of strata of decreasing temperature, in measure as their distances increase up to a certain height above the level of the water. This is what is oftenest observed at sea during the night, and frequently during the day in foggy weather.

Under these circumstances, which are precisely those under which the greatest use is made of acoustic signals, the sonorous rays designed to propagate themselves horizontally in the strata of air in the vicinity of the sea necessarily undergo, through the effect of the inequalities in the temperature under consideration, unequal velocities—those nearest the surface of the water getting ahead of those that traverse the strata situated above. Now, as the direction of the rays is always given by a line at right angles with the common tangential plane of the waves, it will be seen that this direction must be successively inflected from below upward, so long as the propagation continues in a direction near a horizontal one.

This inflection of the sonorous waves, which is not very sensible in the vicinity of the sound's origin, increases greatly with the distance, and at some hundreds of yards may produce considerable of an effect, even with slight variations in temperature in the superposed strata of air.

If we suppose that the temperature of the strata of air decreases with the height, at the rate of one-tenth of a degree only per yard, a calculation gives the following values as the heights at which it would be necessary to place ourselves, in order to hear the sounds that are primitively propagated in the normal direction:

Horizontal distances starting from the origin of the sonorous waves.	Vertical heights of the sonorous waves above their primitive horizontal direction.
328 feet	0.36 inch.
3,280 "	3 feet.
8,200 "	18.78 "
16,400 "	75.14 "
24,600 "	168.9 "
32,800 "	300.5 "

In certain cases, for example during foggy weather, fair nights, and a calm sea warmer than the neighboring strata of air, we would obtain still greater differences than these, resulting from the above hypothesis, and it would be necessary to double or treble the vertical heights if the decrease in the temperature of the air happened to reach two-tenths or three-tenths of a degree per ten feet of height.

The means to be employed for correcting the effects of this accidental deviation in sonorous signals, and to obtain the greatest range possible in all weather, are obvious. Since we have to fear an inflection of the sounds in the direction of a curve whose concavity is turned upward, it must be advantageous to place the starting point of the sounds on one side and their point of arrival on the other, at a sufficient height above the lower strata of air to allow the sounds to follow their path in a straight line freely, without getting out of the space wherein they can be heard.

In conclusion, Mr. Fizeau expresses the hope that special experiments may soon be made, on the open sea and near the coast, under circumstances proper for utilizing practically what is formulated in the above theory.—*La Nature*.

Use of Electric Light in Telemetry.

Up to the present time, the idea of using the electric light as a measurer of distance has not been entertained. Nevertheless, at night this might be of the greatest advantage, and by the process suggested to us by M. Edme Genlaire, not only could a ship provided with producers and reflectors of the electric light discover the enemy stationed at greater or less distances, but at the same time it could in the simplest manner determine its distance.

To do this, it is only necessary to establish in the bow and stern of the ship reflectors, whence can be projected on all points of the horizon luminous rays of equal intensity. If now from each of the two reflectors two luminous rays are caused to converge upon the same point, the distance from which, to the ship is to be determined, a triangle will be furnished for solution whose base (the distance separating the two reflectors) and two adjacent angles are known.

To facilitate the measurement of these angles, the support of each reflector carries a needle, perpendicular to it and which moves over a graduated circle. With regard to the distance to be determined, the two luminous rays can be regarded as the sides of an isosceles triangle whose base is the space between the reflectors, and this consideration will yet be of the greatest use to us.

The two luminous rays being equal in length, the angles at the base are equal, and their sum subtracted from 180° gives the angle at the apex; and it may be assumed that, the distance from base to apex increasing with the sum of the angles at the base, a table will be arranged containing, opposite to each value of the sum of these angles just spoken of, the corresponding distance from the base to the desired point. The two luminous rays grow larger as they increase in length, and it is only with difficulty that the point seen will be brought into the central axis of both converging rays. It is only by a succession of trials that this question can be determined, and great precision as yet cannot be looked for. Following out the above course of reasoning, a ray of light should be projected upon the desired point, so that it shall be well lighted by the

central luminous area. The angle of the reflector required for this result is to be calculated, it is multiplied by two, and the table constructed as a preliminary will show opposite the doubled angular value the desired distance.

This process will be of the greatest utility on account of its ease of execution, on occasions when great exactness is not required and where quickness is of importance. On the other hand, the table can be determined experimentally.—*Electricité*.

Harness Collars.

Custom has much to do with the styles of harness used and the manner of mountings. This is shown in the use of the collar. A man who would use a breast collar upon a coupe or coach harness would become a laughing stock for all his neighbors, while to use a round coach collar upon a trotting horse would bespeak a lack of taste and judgment.

This adopting of a fixed style for any one kind is due in part to the study of the requirements of the case by men who have interested themselves in improving the horse. The trotting horse, in order to give full action to his shoulders, works best in a breast collar when driven single, as the only strain put upon the shoulders is the draught. But if driven double, the pole and yoke must be supported, and the bearing down upon the neck requires more support and a better distribution of the strain than can be given by the breast collar, so a light round collar is preferred. The making of the latter collar is a branch of business that requires much skill if the work is to be well done. A ring around the neck is not what is wanted. The collar must be more than a ring. It must be made to fit the horse's neck. It should set snugly, but not bind at any point. If too narrow in the neck it chokes the horse, and if too wide it falls too far back and interferes with the freedom of the shoulders and produces permanent injury. It was long argued that a soft cushion was wanted, and that the galls on horses were due to the bad character of the collars. This theory seems to have been abandoned by the most intelligent horsemen, who now demand a collar that is solid, smooth, and firm, and one that fits the neck, and in order to maintain the latter quality the hames are fitted to the collar instead of being allowed to draw the collar out of shape, as they will if not bent to fit.

It is not always possible for the owner of a horse to have his neck properly fitted, owing to the distance from the collar manufacturer, but he may give such directions as will produce a well fitted collar. There is no fixed rule that can be relied upon, owing to the difference and size of horses' necks. But an old rule is to measure the height of a horse and add 5 inches to the number of hands for the size of the collar. Thus a horse 15 hands high would require a 20 inch collar. It is claimed by some that this rule works well, and can be relied upon except in the case of heavy draught horses or ponies. In the absence of a collar rule, this guide is better than none, but we think a better result can be obtained by resting the short arm of a carpenter's square upon the horse's neck where the collar rests, and allowing the lower end to rest upon the bearing line of the shoulder, and indicating the length by the long arm of the square. In addition to this, the collar maker should know the character of the neck, whether full or thin at three points, top, at shoulder, and midway between these two points. For weight of collar, give the circumference of the body at the shoulder.

It is claimed by some collar makers that there is no rule which can be followed, and they live up to their theory by making all collars over a single shaped block, but the success of a few men who have made collar making a study falsifies all such claims. There are men in the business who obtain from 20 to 25 per cent more for their collars than their neighbors do, simply because of the collars fitting the horse's neck properly, and if one man can fit from stock a variety of horses, we can see no reason why another should not do the same thing.—*Harness*.

Platinizing Glass.

In the gallery of the *Conservatoire des Arts et Metiers* is preserved a frame of glass covered with a thin layer of platinum, which exhibits this remarkable property. Used as a reflector, the image of an object appears in it as in a mirror; used as if transparent, it acts like common glass, and objects can be seen through it. This invention, to-day abandoned, dates back more than twenty years. It is due to Dodé. The following is the process given by this chemist. It consists in intimately mixing platinic chloride with essence of lavender, A, and on the other hand in preparing a flux consisting of essence of lavender, borate and oxide of lead, B. A and B are mixed. When the paste is quite homogeneous, it is spread by a fine brush over one side of the glass. When dry, it is baked in a muffle at a low red. The volatile matters, including chlorine, are driven off, and the metal is left, mixed with the flux, to which it communicates a gray color. These objects, quite difficult to prepare, have hitherto been little appreciated. This might offer an interesting field for work.—*La Nature*.

THE DINOCERAS, AN EXTINCT MAMMAL.

In 1870, while Prof. O. C. Marsh was making some explorations in central Wyoming, he discovered the remains of a huge animal whose form was entirely unknown to him, and which he at once recognized as an extinct form, and which he named the dinoceras. His explorations in this region, at this time and subsequently, were extensive, and remains of different parts of this type were found from time to time, and the Peabody Museum at Yale College, over which Prof. Marsh presides, now contains specimens or portions of specimens of over 200 individuals, showing how common and abundant a type this must have been during a certain period of the earth's development.

These specimens were found in a basin north of the Uinta Mountains of Wyoming, and east and west of the Green River, within a hundred miles of its banks on either side. During the tertiary period this basin was an inland sea, and was formed into such by the elevation of the Rockies on the east and the Wasatch Mountains on the west, which cut off its connection with the open sea, and turned it gradually into a fresh water lake.


The surrounding lands were covered with a luxuriant tropical vegetation, and as this whole region was gradually raised from the sea level to a height of 7,000 or 8,000 ft., these basins were filled by sediment and wash

they had been washed down and covered up. A considerable portion of the skeleton was discovered near the place where the skull was found, and the engraving represents the specimen as it now appears, the missing parts in certain portions being made up from other individuals. The skull is very perfect, and the skeleton, as a whole, affords an excellent opportunity of study, and an excellent estimate may be formed of the probable appearance of the animal when it was a living inhabitant of the marshy shores of this vast inland sea. The dinoceras appears to have possessed traits in common with the elephant and rhinoceros.

In his walk he must have resembled closely the former, while in some other particulars there is a likeness to the hippopotamus, the neck being longer than that of the elephant (thereby enabling the head to reach the ground); and the horizontal nasal opening and the overhanging nasal bones and well developed turbinal bones render the presence of a proboscis extremely improbable, and, in fact, such a feature would have had no function, and could not well have existed. The brain was small, and the massive bones would indicate a sluggish, dull, slow-moving animal, little adapted to withstand the climatic changes, and unable to adapt itself to the altered environment at the close of the Eocene. They therefore probably became gradually extinct about that period, and no forms have been

New Bridge across the Mississippi at St. Paul, Minn.

The specifications are out for the new bridge, and proposals were opened in June. In accordance with American practice, the design of the bridge is left to the contractor; the design being in conformity with the general plans furnished as to length of span, location of bents, clear headway, grade elevations of masonry, etc., and to the specifications in regard to construction, materials, and unit strains. The structure will be a deck bridge throughout, and will be 41 feet 6 inches wide between railings, having 24 feet roadway and two 8 feet sidewalks. Its total length will be 2,770 feet, with the following spans: Four 40 feet tower spans, three 50 feet tower spans, and two 60 feet spans, all riveted plate girders; nine 80 feet and five 90 feet spans, riveted lattice girders; one 170 feet and four 250 feet spans, pin connected trusses. There will be two trusses 22 feet apart, c. to c., and the single intersection type is preferred. The trusses and girders will be carried on iron trestle bents, each composed of two columns, and the bents united in pairs to form towers at certain designated points. No compression member is to have a length exceeding forty-five times its least width; in beams and girders the compression flange is to be of the same gross section as the tension flange. No continuous girders admitted. Rolled beams for roadway stringers to have a depth not less than

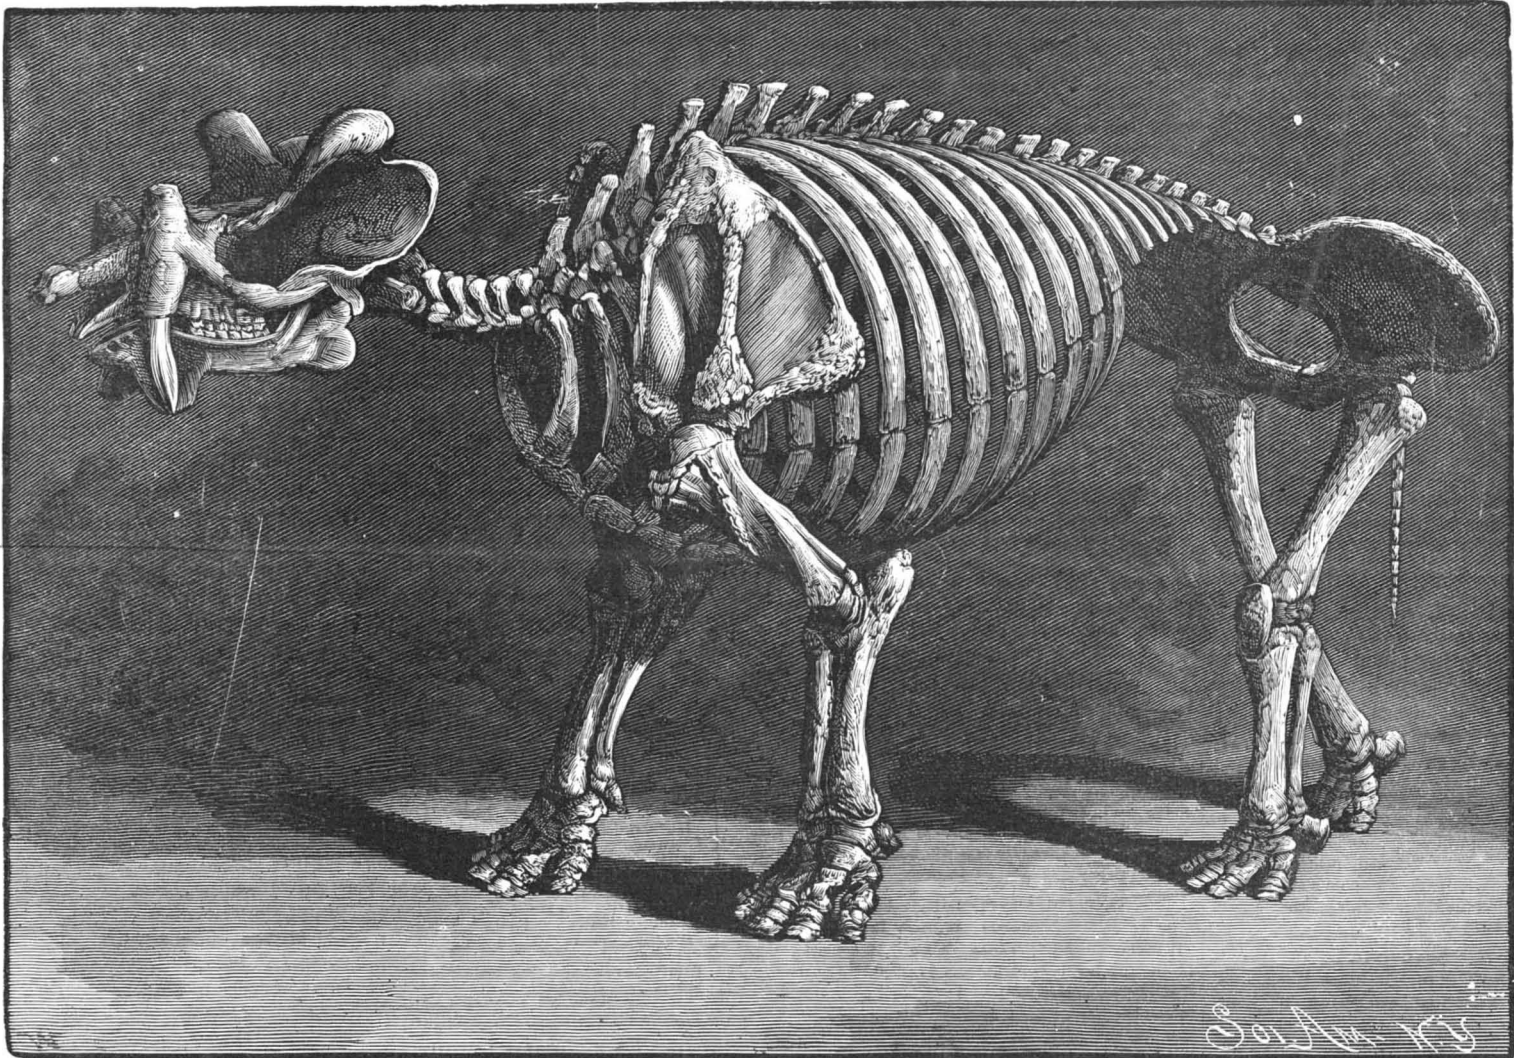

THE DINOCERAS—A GIGANTIC EXTINCT ANIMAL FOUND IN WYOMING.

from the surrounding mountains, and deposits were formed which reached during the Eocene period between one and two miles in vertical thickness. A complete record was thus kept in these gradual deposits of the history of animal life during this period of early tertiary, and the tracing and reading of this history is facilitated by the subsequent washing away and denudation of some portions of this territory, and by the vast process of erosion that has taken place.

In this Eocene lake region were found types innumerable; among others, the ancestral forms of the horse, the tapir, lemurs, crocodiles, tortoises, lizards, fishes, and serpents. Many specimens of forms hitherto unknown were discovered, and most prominent among these are the dinocerata, which have been separated into three groups, the dinoceras, the tinoceras, and the untatherium.

The skill and perseverance which were displayed in making the collection of fossils which have been so instrumental in the classification of these curious forms is manifested by the difficulties that were overcome in securing a complete specimen of the skull of the dinoceras mirabile, which has been taken as a type. The skull was found embedded in a soft matrix, which permitted the brain cavity to be readily worked out. It was, however, located on the edge of a steep precipice, and it was discovered, as the work of exhumation progressed, that several important parts of the skull were missing, and it was necessary to institute a systematic search, which finally resulted in the unearthing of the missing parts in a deep ravine many feet below, where

discovered which would lead one to presume that they had survived a much later age.

The exact nature of the horns is still a matter of conjecture, but Prof. Marsh assigns as possible a form of horn similar to those of the American antelope; or still more probable is, perhaps, the explanation that the horns were covered with a thick, callous skin, and certain injuries found on the horn core of some specimens would indicate that blows had been inflicted through the outer covering on the core during conflict with other animals. Judging from the inside of the foot, this must have been covered with a thick pad, like the elephant. The size of the tinoceras, which is the largest type of the dinocerata, was about twelve feet in length; the height to top of the back was about six and one half feet, and the width across the back about five feet. Judging from existing animals, the weight must have been about 6,000 lb. The dinoceras mirabile was somewhat smaller. The numerous remains found in these deposits would indicate that these strange, uncouth monsters must have been very abundant during the period of the middle Eocene, and the plentiful distribution and the position of these remains lead one to believe that they lived probably in herds on the shores of the tropical lakes, feeding upon the luxuriant vegetation that abounded in these localities. For the data from which the above information has been drawn, we are principally indebted to Prof. Marsh's monograph entitled "An Extinct Order of Gigantic Mammals," published by the U. S. Geological Survey.

one-fifteenth of span, and riveted plate girders not less than one-twelfth of span. The heads of eye bars to be so proportioned that the bar will break in the body rather than in the head or neck; no welds allowed in the body of eye bars, lateral sway rods, or counters, except for loop-eyed bars. Hole one-fiftieth larger than pin.

Two Large Fast Steamships.

Messrs. J. & G. Thomson, of Clydebank, have orders for two steamships of the largest and most powerful type now employed in ocean navigation, to be built for the Inman and International Steamship Company for its mail and passenger service between Liverpool and New York. In point of size alone these two vessels are noteworthy, being about 8,500 tons gross measurement each; but in respect of other features, such as proportions, speed, means of propulsion, and structural character, they will form most noteworthy departures in the development of modern steamships. Their outstanding characteristics will be propulsion by two screws actuated by two separate and self-contained sets of engines and boilers of the most modern type, as regards high pressure and increased expansion of steam, and minute subdivision of the hull by longitudinal and transverse water-tight bulkheads, rendering the ship unsinkable through collision with another vessel, and almost absolutely unsinkable from any cause whatever. It is expected that these vessels will attain a speed of 19 knots per hour on trial.

ENGINEERING INVENTIONS.

A machine for unloading cars has been patented by Mr. John Scully, of South Amboy, N. J. It is a construction made to operate horizontally movable blades or shovels arranged to be carried back and forth from the ends to the center of the car, for shifting coal or other material to the discharge opening there provided in many cars.

An air regulator for furnaces has been patented by Mr. Frank C. Smith, of Delaware, Ohio. It is an automatic device, operated whenever the fire door is opened, and effecting the closing within a prescribed time from the opening of the damper, in order to admit cold air on the top of the fire for a limited period after the fuel is supplied.

A car coupling has been patented by Mr. Thomas Maroney, of Weedsport, N. Y. By this invention the coupling pin is automatically set and held for coupling with an entering link, and the coupler has a link-adjusting attachment by which the projecting end of the link may be raised or lowered to a proper position to couple with cars of different standard heights.

A draught attachment for furnaces has been patented by Mr. George W. Wheeler, of Ogdensburg, N. Y. It is designed especially for locomotive furnaces with fresh air, for which a draught flue, extending from the roof or side of the cab, enters the front end of the ash pit, the opening of the flue mouth being controlled by a lever on the outside, and graduated deflectors attached to the grate bars directing the air thus admitted to most efficiently promote combustion.

MECHANICAL INVENTION.

An improvement in gearing has been patented by Mr. Coles D. Hardcastle, of New York City. The invention covers a novel construction and combination of parts in a system of gearing intended to cause but little friction, and so devised that there will be no cessation or irregularity of motion during its operation.

AGRICULTURAL INVENTIONS.

A hay elevator has been patented by Messrs. Ellis O., Willard O., and Herbert S. Long, of Hayesville, Ohio. This invention covers novel features of construction and combination of parts of an apparatus adapted to raise loads of hay or grain in a store house or barn and dump them into a mow at one side of the driveway.

A plow has been patented by Mr. William J. Locke, of San Antonio, Texas. It is hung upon an axle, is readily adjustable to plow at any desired depth, has a landside wheel and an inclined furrow wheel, the plow having no landside, but only a point and mouldboard, and may be readily changed to take more or less land as desired.

A hay rake and stacker has been patented by Mr. Buck Mason, of Trenton, Mo. This invention covers a novel construction, combination, and arrangement of parts in a horse rake, whereby the hay may be gathered in the field and transported to the wagon or stack, and there elevated and deposited upon the wagon or stack.

MISCELLANEOUS INVENTIONS.

A nut lock has been patented by Messrs. Stephen H. French and William J. Maltby, of Baird, Texas. It is formed with a wedge or body and a head having extensions or flanges, the locking being effected by turning to desired position on a slitted bolt, and driving a key into the slit, when its extensions rest against the flanges.

A hasp lock has been patented by Mr. Brunswick W. Leonard, of Old Saybrook, Conn. The bolt is pivotally connected with and also movable longitudinally with reference to the hasp, by which means, in connection with other novel features, the lock may be used to form a "latch" fastening or a lock fastening as desired.

A reversible folding slate has been patented by Mr. Louis Steinberger, of New York City. It consists of two reversible hinged slate or tablet panels having an adjustable spacing attachment, whereby the two tablets may be held extended at any desired angle, either face of each tablet being arranged so that it may be brought into use.

A knife has been patented by Mr. Isaac E. Schollars, of Bellamy, Mo. It has a pair of blades peculiarly beveled, with equidistant holes for receiving fastening or pivotal screws, with other novel features, it being designed for use as a plain knife, a drawshave, a spokeshave, pruning hook, pruning shears, a chisel, and a vegetable cutter.

A rowing attachment for boats has been patented by Mr. Selden B. Lard, of Waterville, Kansas. This invention covers a novel construction for propelling boats by means of valvular oars, which open when forced through the water in one direction and close in returning, the mechanism to be operated either by hand or by steam.

A nut lock has been patented by Mr. J. Frank Dill, of Ridgway, Pa. It is especially adapted for use with bolts and nuts employed to secure fish plates upon rails of railway tracks, two metal plates being used, one plate passing through the other, so that each holds the other in place, even when the bolts have become worn and loose.

A flower pot and flower pot holder has been patented by Mr. Gayger D. Tolman, of Shawano, Wis. The flower pot is made of a sheet metal blank cut to form a strip for the sides, a disk for the bottom, and a tongue to cover the joining of the sides, the holder being formed of bent wire or a metal bar, adapted to be easily secured to any woodwork.

A rice machine has been patented by Mr. Frederick J. Syme, of New Orleans, La. It consists of a cylinder, bowl, and plug with spiral rib, with

mechanism for revolving the bowl and plug in opposite directions, for removing from rice that covering immediately within the hull without to any considerable extent crushing or breaking the grains.

A bottle stopper has been patented by Mr. Frederick Thorn, of Wilkesbarre, Pa. The bottle is made with a lug or projection slightly below its neck, and a neck band held on the bottle carries swiveled side bars, one end of which carries a stopper frame and an elastic stopper, the other end being adapted for engagement with the lug or projection formed on the bottle.

An indicator for exhibiting advertisements by day and night has been patented by Mr. Jose E. Mercadante, of Rio Janeiro, Brazil. A hollow column has a double arm carrying in vertical bearings a horizontally revolving casing, in which are transparent sign plates, a gas pipe through the column and one arm supplying a burner within the casing.

A fence has been patented by Messrs. John A. Williams, of Orange, and Edwin H. Thomas, of Hornby, N. Y. It is made without driving posts into the ground, having cross base pieces, to which are attached side braces for the uprights, and a bottom rail or board, inserted in mortises in the uprights, and notched over the base piece.

An apparatus for the manufacture of salt has been patented by Mr. Richard G. Peters, of Manistee, Mich. It has an elevator carrying buckets which have little holes or perforations, together with a peculiar construction of storage and other troughs, and various other novel features of construction and arrangement of parts.

An extension fire ladder has been patented by Mr. Frederick A. Warner, of Halifax, Nova Scotia, Canada. This invention covers a novel construction, combination and arrangement of parts and details, making a ladder capable of being quickly moved about, raised and set to any angle in a narrow or wide street, and having means for leveling the front truck carrying the ladder.

An evaporator has been patented by Mr. Seth W. Lowell, of Belfast, N. Y. It is designed more especially for use as a fruit drier, and has a case, open at one side, provided with sections of steam pipe, and having inclined deflecting plates removably connected to the under side of each section, the fruit to be dried being set in trays upon the upper faces of the pipes.

A process of producing designs on glass plates has been patented by Mr. Ludwig Lendry, of New York City. A specially prepared coating is put upon the glass plate, and then the pattern is placed on the coating and the plate exposed to light, after which the pattern is removed and the glass plate washed with oil, whereby the design of the pattern appears upon the plate.

A dry goods exhibitor has been patented by Mr. John W. Leass, of West Manchester, Ohio. It consists in a support of suitable form and convenient height, provided with a wedge-shaped standard, having a rounded end adapted to enter into the end of a cloth bolt and support it in vertical position, to economize time and labor in showing and handling goods.

An ink eraser has been patented by Mr. Richard M. Swinburne, of La Crosse, Wis. It consists of a fibrous holding body charged with citric acid, rolled to pencil form, and having a cover, the moistened end of the eraser being rubbed on the ink to be erased, followed by a drop of water charged with chloride of lime, and excess of moisture absorbed by blotting paper.

A gin saw sharpening machine has been patented by Messrs. William Behan and Paul Frienschner, of Texarkana, Texas. It consists of a frame with bearings for the gin saw shaft, a horizontal shaft in bearings adjustable vertically and horizontally to suit the saws, a filing machine being made adjustable thereon, and means for operating it, with other novel features.

A book binding band has been patented by Mr. George Huether, of New York City. It is formed of heavy twisted warp cords bound or woven close together by fine filling threads, making a band of sufficient strength, thickness, and uniformity to take the place of the parchment or raw hide now in common use, which frequently loses strength with age and is irregular in quality.

An evaporator has been patented by Mr. Rufus Goodson, of Barnesville, Mo. It is for defecating or purifying saccharine juices, and has a furnace body with a circuitous combustion chamber, tracks held to the body, and a rotatable carriage mounted on the tracks, the carriage carrying pans which close the top of the furnace, these pans holding the saccharine juices in different stages of evaporation.

A temperature alarm has been patented by Mr. Donald McDonald, of Louisville, Ky. The invention covers an apparatus of peculiar construction by which a connection is formed between an alarm or cock, put into operation by an open column of mercury and alcohol contained in a space communicating with the mercury, and may be used with or without electrical devices.

A gas burner has been patented by Mr. David R. Kline, of Ridgway, Pa. The inlet pipe has a nipple screw-threaded on its inner and outer sides, a tube screwed into the inner thread of the nipple and a disk upon the outer thread, with a detachable cap and pendant flange supported upon the disk, to heat the gas more highly and give more perfect combustion when it issues through the jet holes.

Bird food forms the subject of a patent issued to Mr. John D. Heins, of New York City. A new article of manufacture is described, consisting of the whites and yolks of boiled eggs, mixed with pulverized farinaceous substance, prepared after a specified manner, making an article that will keep and can be put up in small boxes or packages and sold upon the market.

A bottle stopper has been patented by Mr. William Beardsley, of Beacon, Iowa. This invention covers an improvement on a formerly patented invention of the same inventor, of stoppers for bottles designed to hold aerated liquids, in which the pressure of the gas forces a ball held within the bottle into a packing ring in the neck of the bottle, provision being made for the expansion of the packing ring.

A bottle casing has been patented by Mr. Wilson Godfrey, of New York City. Its outside portion is formed of three ply veneer, inside of which, against the bottle, is a thick packing of felt or other suitable material, the top being also of veneer, of conical shape, fitting around the neck of the bottle, an inside and an outside hoop fitting around where the bottle bends to form the neck, and there being a hoop around the bottom.

A lumber cart has been patented by Mr. Thomas B. McFaul, of Phillips, Wis. Across opposite ends of the frame are journaled rollers, and there is an intermediate roller armed with short spikes adapted to take hold of the lumber, this roller being adapted to be conveniently locked, while under one end of the frame there is a trailing wheel, the cart being durably built and designed to easily discharge its load without breaking the ends of the lumber.

A beer cooler has been patented by Messrs. Edward J. Liddicoat and Albert W. Utzinger, of Astoria, Oregon. It consists of a specially devised box, readily attachable to the chimes of the beer keg at the end carrying the tap, the box carrying a spiral pipe which may be surrounded with ice, said spiral pipe connected at its inner end with the inner tap, and terminating outside the box in an outer tap, so that the beer will rest in and be drawn through the ice-covered spiral pipe.

A baling press has been patented by Mr. William A. Laidlaw, of Cherokee, Kansas. The frame has a feed opening to the baling chamber, a follower and sweep, a compressor within the chamber, and a sliding frame connected thereto, with other novel features, the invention being an improvement on a former patented invention of the same inventor, and designed to compress hay to one half its bulk before delivering it to the bale chamber, thereby dispensing with the usual door and catches.

SCIENTIFIC AMERICAN
BUILDING EDITION.

JULY NUMBER.

TABLE OF CONTENTS.

1. Plate in Colors of a Two Thousand Five Hundred Dollar Dwelling, at Montclair, N. J., with floor plans, also sheet of details, specifications, bills of estimate, etc.
2. Plate in Colors of a Handsome City Residence at Kansas City, Mo., costing Seven Thousand Five Hundred Dollars, with plans, specifications, sheet of details, etc.
3. Page drawing in perspective of an Elegant Stone Residence, corner 119th Street and Sixth Avenue, New York City.
4. An Attractive Residence at Providence, Rhode Island, with perspective and plans. Cost, Five Thousand Five Hundred Dollars.
5. Dwelling at Jersey City, N. J., with elevations and floor plans. Cost, Three Thousand Five Hundred Dollars.
6. Page drawing showing floor plans and elevations of a very comfortable Dwelling at Flatbush, N. Y., costing Three Thousand Seven Hundred Dollars.
7. Drawing in perspective of a Dwelling at East New York. Cost, about Three Thousand Five Hundred Dollars.
8. A Modern English Dwelling, with half page perspective drawing.
9. Drawing in perspective of a Residence at East Orange, N. J., costing about Four Thousand Five Hundred Dollars.
10. Engraving of the Bourse at Havre, France.
11. Hotel and Office Building, River Side Avenue, Spokane Falls, W. T. Quarter page engraving.
12. The new Facade of the magnificent Cathedral of the Duomo of Florence. Full page engraving. Portrait of Donatello, the sculptor.
13. The Manchester Royal Jubilee Exhibition, with nine large engravings, covering four pages, including specimens of "Old Manchester and Salford."
14. A Residence of Moderate Cost, in St. Louis Park, Minn., with perspective and floor plans.
15. A substantial City Residence at Chicago. Quarter page engraving and floor plan.
16. Design for Young Men's Association Building, Buffalo, N. Y. Half page drawing.
17. Illustrations of Memorable Buildings in Rouen, France, including the front of the Cathedral of Notre Dame and the portal of St. Ouen. Three engravings.
18. Drawings in perspective of Three Comfortable Dwellings of Moderate Cost, at Cambridge, Mass.
19. The New Post Office, Springfield, Ohio. Quarter page engraving.
20. Miscellaneous Contents: Women as Architects. Terra Cotta Panels.—Acoustic Effects of the Britannia Bridge.—Regulation of Building in Boston.—Improved Camera Clamp and Tripod Head, illustrated.—Joints in Woodwork, with illustrations.—Preventive for Dry Rot.—Great California Dam.—Plumbing and Drainage.—Varying Meters, illustrated.—Sketch of Life of M. Ruprich-Robert, the distinguished French Architect.—Home Interests.—Pa Crusta, a new style of interior decoration.—Algerian Marbles.—Ancient Relics at Sidon.—Portrait of Henri Jacotot, raiser of Gloire de Dijon.—New Hardy Passion Flower, illustrated.—Effects of Change of Temperature on Girders.—The Howe Broiler Farm, with two illustrations, showing method of heating brooders.—Air Filter illustrated.—About Plumbing.—Common Use of Woods in England.—Sandstone as a Building Stone.—Hall Patent Sheathing, illustrated.—Red Granite.—A Novel Weather Vane, illustrated.

The Scientific American Architects and Builders Edition is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects. The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural publication in the world. Sold by all newsdealers.

MUNN & CO., PUBLISHERS,
361 Broadway, New York.

Business and Personal.

The charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

In the new "Trautwine's" the articles on water pipes, pipe joints, valves, etc., and those on beams, riveted girders, etc., are new and full. Dimensions, weights, and prices are revised to date.

For Sale Cheap—Two patents on kitchen articles. Address C. A. Bryant, box 61, Wakefield, Mass.

Wanted.—To work on royalty, the British patent of a good invention in machinery. H. J. Griswold, Leicester, England.

Second-hand engine and boiler for sale cheap. One non-condensing walking beam engine, cylinders 20 x 36 inches, in good condition; also a drop flue boiler, 8 ft. x 28 ft., 16 riveted flues (14-12 inch and 2-20 inch). For further particulars address P. M. Wise, Superintendent Willard Asylum for the Insane, Willard, N. Y.

For Sale—An entirely new mechanical movement. Adapted to small machinery for producing a forward and retrograde motion. Apply to Parker & Parker, 164 High Street, Boston, Mass.

Press for Sale—Quick acting. Hole in bed 8x5; punches to center of 13 in. sheet; 2 1/2 in. shaft; also four spindle Drill. A few second-hand engines in first-class condition. B. W. Payne & Sons, Elmira, N. Y.

For the latest improved diamond prospecting drills, address the M. C. Bullock Mfg. Co., 133 Jackson St., Chicago, Ill.

The Australian-American Trading Co., 20 Collins St., West Melbourne. Sole agencies for American novelties desired. Correspondence solicited. Care of Henry W. Peabody & Co., Boston.

The Railroad Gazette, handsomely illustrated, published weekly, at 73 Broadway, New York. Specimen copies free. Send for catalogue of railroad books.

The Knowles Steam Pump Works, 113 Federal St., Boston, and 93 Liberty St., New York, have just issued a new catalogue, in which are many new and improved forms of Pumping Machinery of the single and duplex, steam and power type. This catalogue will be mailed free of charge on application.

Link Belting and Wheels. Link Belt M. Co., Chicago.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

Woodworking Machinery of all kinds. The Bentel & Margendant Co., 116 Fourth St., Hamilton, O.

Nickel Plating.—Sole manufacturers cast nickel anodes, pure nickel salts, polishing compositions, etc. \$100 "Little Wonder." A perfect Electro Plating Machine. Sole manufacturers of the new Dip Lacquer Kristaline. Complete outfit for plating, etc. Hanson, Van Winkle & Co., Newark, N. J., and 92 and 94 Liberty St., New York.

Iron Planer, Lathe, Drill, and other machine tools of modern design. New Haven Mfg. Co., New Haven, Conn.

Supplement Catalogue.—Persons in pursuit of information of any special engineering, mechanical, or scientific subject, can have catalogue of contents of the SCIENTIFIC AMERICAN SUPPLEMENT sent to them free. The SUPPLEMENT contains lengthy articles embracing the whole range of engineering, mechanics, and physical science. Address Munn & Co., Publishers, New York.

Timber Gaining Machine. All kinds Wood Working Machinery. C. B. Rogers & Co., Norwich, Conn.

Curtis Pressure Regulator and Steam Trap. See p. 253.

Use Ainsworth's Belt Clamp. See advt. next issue.

Iron, Steel, and Copper Drop Forgings of every description. Billings & Spencer Co., Hartford, Conn.

We are sole manufacturers of the Fibrous Asbestos Removable Pipe and Boiler Coverings. We make pure asbestos goods of all kinds. The Chalmers-Spence Co., 419 and 421 East 8th Street, New York.

Chucks—over 100 different kinds and sizes in stock. Specials made to order. Cushman Chuck Co., Hartford, Ct.

Steam Hammers, Improved Hydraulic Jacks, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

60,000 Emerson's 1887 Book of superior saws, with Supplement, sent free to all Sawyers and Lumbermen. Address Emerson, Smith & Co., Limited, Beaver Falls, Pa., U. S. A.

Safety Elevators, steam and belt power; quick and smooth. D. Frisbie & Co., 112 Liberty St., New York.

"How to Keep Boilers Clean." Send your address for free 88 page book. Jas. C. Hotchkiss, 120 Liberty St., N. Y.

The Holly Manufacturing Co., of Lockport, N. Y., will send their pamphlet, describing water works machinery, and containing reports of tests, on application.

Pattern makers' lathe. Back knife gauge lathe for turning chair stock. Rollstone Machine Co., Fitchburg, Mass.

Split Pulleys at low prices, and of same strength and appearance as Whole Pulleys. Yocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

Send for new and complete catalogue of Scientific Books for sale by Munn & Co., 361 Broadway, N. Y. Free on application.

NEW BOOKS AND PUBLICATIONS.

FIFTH ANNUAL REPORT OF THE OHIO AGRICULTURAL EXPERIMENT STATION FOR 1886. Columbus, O. 1887. Pp. 317.

In this admirable manual is a review of the extensive work of the State Experiment Station under the directorship of N. S. Townshend, Esq., assisted by his staff. The experiments for the past year included field tests of a great variety of wheat, potatoes, strawberries, and other crops. The opinions formed by the station authorities as the result of these trials are given succinctly for each kind or variety of plant. As an indication of the laborious nature of this investigation, it may be mentioned that of wheat alone some hundreds of named kinds are elaborately reported on. Thick and thin seeding was tried, different fertilizers were used, and the results are tabulated. Pigs were examined, to ascertain the relative merits of different breeds and of different systems of feeding, and are reported on. Insects, weeds, vitality of seeds, botanical notes, and veterinary observations also form subjects of parts of the book. It is sent free to all inhabitants of Ohio, to others on remittance of 10 cents. It is a volume that no farmer of the State or its vicinity should be without, and to all intelligent agriculturists it is a work of the highest interest.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information, and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all, either by letter or in this department, each must take his turn.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(1) T. O. T. asks: 1. Can you give a receipt for a good toning solution? A. Acetate of soda and common salt, each 15 grains; chloride of gold, 1 grain; 8 ounces water. This makes a good, practical toning solution, but something always depends on the way your paper is sensitized. 2. Is there any way of polishing photographs without the aid of a burnisher or glass plate? A. Not any way of making so good a polish. 3. What is the best cure for ringworm? A. Wash the part affected with a little lemon juice; then rub in with the finger a little gunpowder which has been bruised in a mortar. Do this gently about twice a day. 4. Can you give a receipt for good rubber cement? A. See receipt given in article on Cements in SCIENTIFIC AMERICAN SUPPLEMENT, No. 158.

(2) B. F. McD. asks: What is the best kind of steel to make magnets of for telephone receivers? Can Bessemer, good tool, or spring steel be used? Also should the same be tempered or hardened? A. For magnets the usual run of Bessemer steel is too soft. Good tool steel is to be recommended, tempered to a straw color, provided you can subject it to a sufficiently powerful source of magnetization. You may very well use a purple tempering color.

(3) E. M. asks the radius of the sharpest curves in use on the elevated railroads in New York city. A. 90'.

(4) F. J. P. asks how he may construct a reliable telephone from his store to his residence, a distance of 180 rods. A. Cut a circular aperture about 6 inches in diameter in a board. Over this tack a piece of parchment. To a wire solder a button or disk one inch in diameter. Pass the wire through a hole in the center of the parchment, support the latter horizontally, wet it, and suspend a weight to the wire. Prepare two of these. When dry, place one at each end of the line and stretch a wire tightly between them, drawing against the bottoms. Where the wire goes around corners, which should be avoided as much as possible, one or more loops of marlin must be used to carry it. It must touch no solid object. If properly arranged, on talking against one drum head the sound will be reproduced by the other.

(5) S. A. H. writes: Many of the spectacles sold are advertised as Russian or Scotch pebble. Do they make any glass of Russian or Scotch pebble? Is it superior to ordinary flint or crown glass for spectacles? A. Pebble spectacle glasses are made from pure crystal quartz. The advertised name of origin has no significance whatever as to their quality. Fine crystalline quartz is found in every country, and probably none better than in the United States. It is no better than good optical glass in its optical properties, but is somewhat harder than glass, and when well polished, retains its luster longer than glass. Ordinary spectacle glasses are made of plate glass, which is inferior to quartz in optical quality, and generally imperfectly polished.

(6) T. H. asks: 1. Will it be a good plan to connect a lightning rod to an iron pump in well that has 1½ inch gas pipe for suction? A. Yes; but the pipe should not be relied on as the only ground for your rod, unless it always extends deeply into the water. 2. Are the nickel or silver plated points on lightning rods better than plain copper wire points? A. Bright points are more efficient than dull ones. 3. How many points should there be on one story house, about 27 feet square, with 1 24x14 feet? A. There should be one on each chimney and one on each gable. 4. How to make a bright black paint for locomotive stack and smoke box, that can be put on with a sponge? A. Coal tar answers very well for this purpose. Asphalt varnish is also good.

(7) H. C. O. asks if hard rubber would do as well or better than glass for the plate of a Wimshurst electric machine, such as has been described in the SCIENTIFIC AMERICAN several times in the past few years. I have constructed one, and it worked well, but I have trouble with the glass plates breaking. A. Rubber plates are sometimes used for this purpose, but in time they deteriorate. The sulphur which separates from the rubber and incrusts its surface seems to interfere with its action. Glass seems to be preferable.

(8) H. S. B. asks: Does the phonograph imitate the peculiar tone of voice of the person who speaks into it, and can it imitate the different notes in a piece or song, and can it imitate the different musical instruments? A. The phonograph does imitate all the features of the voice or any other sound affecting it, but imparts also its own metallic character thereto. Musical notes will be reproduced if the exact speed of rotation is preserved in the second turning of the barrel.

(9) H. J. K. desires a formula for the wax used for map engraving by the wax plate process. A. Take of white wax 2 ounces, asphaltum 2 ounces. Melt the wax in a clean pipkin, add the asphaltum in powder, and boil to a proper consistence. Pour it into warm water, and form it into balls, which are kneaded and put into taffeta for use.

(10) W. C. C. writes: 1. I have two pop valves on my compress set at 90 pounds, and neither ceases to pop until they get to near 80. What is the remedy? A. There is none, but to relieve them of any undue friction by cleaning free from rust and dirt. Possibly the spring is not set with a central tension, which may cause slight friction. No safety valve will close within 2 or 3 pounds of its opening pressure unless pulled back to its seat. The increased area after opening is the primary cause of this, which with friction from dirt or rust may add several pounds to the difference of opening and closing. 2. Last year I had three ½ steel sheets put on the bottom of each of my boilers, the original boiler being seven-sixteenths iron. Boilers are 60 in. by 16 ft. long. Was it a good plan to put steel sheets on old boilers? A. There should be no apprehension in regard to putting steel sheets in your old boilers, if the work is well done. 3. We use water from artificial tank. What kind of scale preventive would you advise me to use? A. Could not give advice in regard to scale without knowing kind of scale you have. See SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 286, 137, also Davis on steam boiler incrustation, which we mail for \$2.00.

(11) C. W. B. asks a receipt for bluing gun barrels. A. Clean bright, then heat in an oven or long muffle until the desired color is obtained. Cool and rub with linseed oil.

(12) N. McG.—You can japan brass by heating, to oxidize the surface, or dipping in acid for the same purpose. Bright work does not take the japan well. It is also liable to crawl in baking.

(13) T. M. B. asks a receipt for icing for cakes and pastry. A. 10 teaspoonfuls of pulverized sugar to the white of one egg. Beat to a stiff froth.

(14) C. R. asks when a rattlesnake has its first rattle. A. At 2 years of age.

(15) A. J. G.—To make stick rouge. Melt paraffine and mix rouge so that there shall be as little paraffine as will possibly hold the rouge together, and roll into sticks.

(16) W. T. B.—The amount of flow in an artesian well is not always indicated by the static pressure when the well is closed. The kind and coarseness of the sand or gravel composing the stratum from which the water enters the pipe, governs the volume of the flow to a large extent. A high static pressure with the lower end of pipe terminating in a coarse gravel usually gives an abundant flow of water. While if it terminates in close sand the flow is strangled or the water may bring sand with it if under great pressure.

(17) A. N. S. asks: What weight will be sustained by a cubic foot of air at 150° Fah., the outside air being at 80°. A. 0.008463 of a pound per cubic foot.

(18) J. M. W. asks: Why are kites not more used for propelling boats? A. It would not be possible thus to obtain as much power as can be got from sails, and the direction of the vessel could not be as readily controlled. Short trips have thus been effected frequently as an experiment, a man having thus made good time across Long Island Sound in a small boat, and it is reported that Benjamin Franklin was once towed across a pond while in swimming, by holding a kite string in his mouth.

(19) F. V. V. writes: In reply to G. S. D., No. 19 query of July 9, page 27, I find that you have made a mistake. You state never sharpen the clipper on the flat side, always on the bevel side. Use Washita or Arkansas stone and oil. Being a cutter and grinder, and having about eight or nine years' experience in the business, I feel it my duty to inform you of your error. I grind from 15 to 30 pairs of clippers per month myself, and have tried almost every way and everything. The way that I have succeeded in turning out a clipper to give perfect satisfaction was to take the clipper apart and grind the flat surfaces on a wheel running horizontally. This wheel is made up of two-thirds tin and one-third lead, and is turned up on a lathe perfectly flat. Then it is ready for use. When in use, Soling flour emery is used the most, as it is the most effective. A little sprinkled on the wheel when in motion gives great satisfaction. When the wheel is in such constant use, it must be turned up every three months, to be in good condition.

(20) F. L. D.—The force of dynamite and all other explosives is equal in all directions from the center fire. Whatever is laid upon the charge has weight. The air has weight. Tamping is, however, more necessary with gunpowder than with dynamite, gunpowder, and the other high explosives, because the latter act with many times the suddenness of gunpowder.

(21) W. I. asks: Does a larger coal stove produce more heat from the same amount of coal than a smaller one? A. The size of stove should be proportioned to that of the room to be heated, when the stove is burning the fuel in the manner for which it was designed. There is a great difference in the way various stoves are intended to operate, but the forcing of combustion in too small a stove, in order to warm a large room, frequently results in carrying no inconsiderable portion of the heat up the chimney.

(22) Americus.—Balloons cannot be made of papier mache with rivets and braces, nor are they yet made of sufficient buoyancy to carry their own gas-generating apparatus. See a great number of articles on balloons in back numbers of SCIENTIFIC AMERICAN SUPPLEMENT.

(23) J. R. D. asks if meerschaum pipes are ever colored by a chemical process. A. They are. Various dealers throughout the United States boil the meerschaum in an oily mixture, the exact composition of which is kept secret, and thereby artificially color the pipe. The process is restricted to the cheaper varieties.

(24) H. J. asks about liquids for silver plating. A. Such preparations are usually salts of mercury in combination with silver, of which combinations

the following is one of the better class: Take 3 ounces of nitric acid, put it in a bottle, and add a 25 cent piece, cut fine. Let it dissolve, and then add 3 ounces mercury, which is also to be dissolved; finally add 2 quarts rain water. In using, immerse the article to be plated, and after a few minutes rub gently with a piece of sponge wet with the solution, and polish with buckskin. The thickness of the plate may be increased by repeating.

(25) E. M. asks if silver chloride without being in contact with organic matter is decomposed by sunlight, also silver cyanide such as used in plating. A. The former is, while the latter, which is the double cyanide of potassium and silver, is not affected by light.

(26) A. B. desires a receipt for a varnish that when applied to one side ordinary glass will imitate the genuine ruby glass. A. Use an ordinary shellac varnish, made by dissolving shellac in alcohol, and color to suit your fancy by dissolving some aniline red in a little alcohol and mixing it with the varnish.

(27) C. P. McG. wants a formula for making a paste or glue with which to stick labels to tin boxes. A. Use starch paste with which a little Venice turpentine has been incorporated while it was warm.

(28) A. H. N. asks if there is anything that will positively remove freckles from the face of a person. A. Nothing will entirely banish freckles, although a wash made by dissolving three grains of borax in five drachms each of rose water and orange flower water is said to be excellent.

(29) P. H. C. desires a receipt for making a washing blue, and the best way to make it and compound it. A. Take one ounce of soft Prussian blue, powder it in a mortar with 1 quart of clear rain water and add ¼ ounce of oxalic acid. A teaspoonful of this is sufficient for a large washing.

(30) M. S. T. desires a receipt for mixing white paint (lead or zinc) to paint inside woodwork for his house, so it will not turn yellow. A. Use zinc white mixed with white varnish, and finish off with white varnish, also use best quality of ingredients to insure perfect success.

(31) R. S. McL. writes: Water, when allowed to freeze upon glass, adheres quite strongly. Will you please explain the philosophy of this? A. The ice is in intimate contact with the surface of the glass, and adheres, as all substances do under like conditions. The phenomenon is described in manuals of physics as adhesion. Glue and other substances show it in a high degree.

(32) T. K. P. desires a receipt for making a paint for branding wood red, something that will dry quick and not run when varnished. A. Take of shellac, 2 ounces; borax, 2 ounces; water, 25 ounces; gum arabic, 2 ounces. Boil the borax and shellac in water until they are dissolved, add the gum arabic, and withdraw from the fire. When the solution has become cold, complete 25 ounces with water, and add Venetian red enough to bring it to a suitable consistence and color.

(33) J. J. desires recipe for a good, harmless hair wash. A. Take of scalded black tea 2 ounces, with 1 gallon boiling water; strain, and add 3 ounces glycerine, tincture cantharides ½ ounce, and bay rum 1 quart. Mix well by shaking, and then add perfume.

(34) E. M. R.—High and low tone is difference in pitch, which is made by difference in the number of vibrations per second. The same tone may be loud or strong, or weak or soft, with the same number of vibrations per second. The strength of tone is a separate quality from pitch. A is right. B is also right. You have the terms confused. High and low are properly pitch terms. Loud and soft are properly volume terms. The lowest sound recognized in music has 32 vibrations per second. Highest, C, 9th octave, 16,384 vibrations per second. Vibrations may be heard slightly below and considerably above these figures.

TO INVENTORS.

An experience of forty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

July 5, 1887,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Abdominal supporter, C. K. Farrington..... 365,805
Advertising medium, J. W. Callahan..... 365,907
Air moistener, T. Bradford..... 365,785
Amalgamator, A. N. Rollins..... 366,130
Anderson, O. Steele..... 366,133
Animal releasing device, E. E. Hipp..... 366,100
Annunciator drop, electro magnetic, J. J. O'Connell..... 365,935
Atomizer, A. J. & G. H. Palmer..... 366,022
Awning or roofing, A. J. Bonner, Jr..... 366,071
Axle boxes from wheel hubs, implement for extracting, H. R. Geyer..... 366,163
Axle lubricator, J. P. Ruth..... 366,181

Baking furnace and oven, H. McCollum et al..... 365,929
Bathing machine, J. W. James..... 366,110
Battery. See Galvanic battery.
Bearing, ball, E. B. Lake..... 366,117
Bed and dressing case, combined, Sheppard & Buell..... 366,191
Bedclothes holder, S. A. Henning..... 365,814
Bedding protector, B. L. Holladay..... 366,000
Bedstead, wardrobe, W. D. Snyder..... 365,948
Beer cooler, Liddicoat & Utzinger..... 365,011
Belt, electric, Williams & Hammer..... 366,058
Belt fastener, A. J. Preston..... 366,127
Bevel and square, combined, R. E. Shaw et al..... 365,869
Bit. See Bridle bit.
Boats' gunwales, roller attachment for, P. S. Katsenys..... 366,007
Bobbin winder, D. W. Corey..... 366,909
Boiler. Steam boiler. Sectional boiler.
Boiler flue cleaner, F. L. McGahan..... 365,836
Boiler setting, T. Poore..... 365,858
Boilers, apparatus for purifying the water in steam, J. W. Hyatt..... 366,170
Boot or shoe, A. Haven..... 366,095
Boots or shoes, manufacture of, M. Wise..... 366,142
Bottle case, H. Palmer..... 365,851
Bottle stopper, W. Beardsley..... 365,961
Box. See Signal box.
Bracket. See Dental bracket. Stage or scaffold bracket.
Brake. See Car brake.
Bread raiser, C. J. Walthall..... 366,050
Bretzel and cracker manufacturing apparatus, D. F. Stauffer..... 366,041
Bricks, annular kiln for manufacturing, O. Hertrampf..... 365,997
Bridge, G. W. Coultas..... 365,970
Bridge fender, swinging, F. G. White..... 366,053
Bridges, [automatic signal for draw, L. J. Johnston..... 365,818
Bridle, J. A. Hunter..... 366,108
Bridle bit, H. Baldrige..... 365,968
Broom hanger, R. D. Dow..... 365,802
Buoy, P. Delany..... 366,077
Burner. See Gas burner.
Button, P. Hirschfeld..... 366,101
Button, E. Zoller..... 365,894
Butt-hole marking gauge, D. Phillips..... 365,888
Can. See Milk and creaming can.
Car brake, T. J. Megown..... 365,839
Car brake, automatic, O. P. Smith..... 366,059
Car coupling, J. A. Frazier..... 365,907
Car coupling, T. Maroney..... 366,018
Car heater, W. C. Dunn..... 365,977
Car heater, J. H. & S. W. Snyder..... 366,040
Car heaters, stove box for, J. W. Fowler..... 366,087
Car, railway, J. W. Post..... 365,969
Car step, J. F. Knapp..... 365,924
Car, stock, G. Grossman..... 366,061
Car wheel, E. Peckham..... 366,179 to 366,183
Car wheel, chill, L. R. Faught..... 365,914
Car wheels, mill for rolling, S. T. Hughes..... 366,109
Cars, apparatus for heating and ventilating railway, W. E. Depp..... 365,975
Cars, automatic brake for railway, T. J. Megown..... 365,840
Cars, cable road for street, C. Leavitt..... 366,119
Cars, fender for street, Mason & Hale..... 366,015
Cars, machine for unloading, J. Scully..... 366,033
Carpet lining, B. S. Bryant..... 365,966
Carpet stretcher and tack driver and extractor, G. F. Kolb..... 365,823
Carpenter's gauge, A. Fales..... 365,904
Carriage step, F. B. Johnson..... 366,111
Carriage top, C. L. Pritchard..... 366,129
Cart, dirt, S. M. Stevenson..... 366,048
Cartridge, electric, E. A. Monfort..... 365,942
Cartridge loading machine, N. Harrison..... 365,919
Case. See Bottle case. Pin case. Watch case.
Caster, furniture, E. Hamburjer..... 365,809
Chair. See Iron chair.
Chair and cradle, child's combined rocking, J. Ridenour..... 365,862
Chair bottom, E. T. Wade..... 366,048
Chalk suspender, D. W. Seely..... 365,867
Chopper. See Cotton chopper.
Churn, J. M. Curtice..... 366,157
Churn, M. Wilbur..... 366,065
Chute, stock, W. Hess..... 365,998
Cider mill, W. G. Gray..... 366,165
Cider or wine mill, W. E. Depp..... 365,976
Cigar bunching machine, H. J. Bachran..... 366,062
Cigar bundling machine, G. Leist..... 366,926
Cigar tip cutter, C. Knudsen..... 366,172
Circuit closer, thermotic, J. C. Mackey..... 366,176
Clasp. See Pencil clasp.
Cleaner. See Boiler flue cleaner.
Clevis, G. W. Vinson..... 366,140
Closet. See Water closet.
Clothes drier, N. J. M. Heck..... 366,096
Clothes drier, W. D. Martin..... 366,013
Coat and hat hook, wire, P. Taylor..... 365,882
Coat hanger, F. Taylor..... 365,881
Coffee roaster, mixer, and scourer, G. W. Hungerford..... 366,106
Collar pad, horse, J. S. Pope..... 366,027
Collars, instrument for the measurement of horses' necks for fitting, Spence & Storrar..... 365,873
Comb. See Curry comb.
Convertible stand, F. S. Weatherley..... 366,051
Cooler. See Beer cooler.
Cordage, machine for making, C. E. Barnes..... 366,064
Cotton and hay press, perpetual, J. La Dow..... 365,824
Cotton chopper and scraper, S. J. Rouse..... 365,864
Cotton gin, E. Van Winkle..... 366,189
Cotton press, self-feeding, M. R. Davis..... 365,799
Coupling. See Car coupling. Thill coupling.
Culinary apparatus, E. Fowle..... 365,915
Cultivator and corn planter, combined, S. W. Wright..... 365,893
Cultivator and potato digger, combined, H. C. Moore..... 365,844
Cultivator, sulky, J. C. Bird..... 365,900
Curry comb, S. Norwood..... 366,019
Curry comb, C. J. Waldron..... 365,855
Curtain, roller, Jones & Holt..... 366,112
Cutter. See Cigar tip cutter. Pipe cutter. Twine cutter.
Dental bracket, C. B. Porter..... 365,859
Dental flask, A. T. Hawley..... 365,811
Digger. See Potato digger.
Display horse, Emerick & Smith..... 365,979
Ditching machine, A. Price..... 366,185
Door check, W. H. Downing..... 366,159
Door knob and lock, combined, E. Whittingham..... 366,891
Door sill, J. B. & G. W. Beam..... 365,774
Doors, fastening for hinged and sliding, G. G. Smith..... 365,871
Dredger, K. Knott..... 366,010
Dressmaker's guide, M. A. Davis..... 365,800
Drier. See Clothes drier.
Drill. See Rock drill.
Drilling and tapping machine, universal, M. Geary..... 365,988
Drilling apparatus, J. O'Neil..... 365,860

Drum, W. R. Johnson..... 365,517	Meats, instrument for curing, J. J. Bailey..... 365,595	Spring. See Elliptic spring.
Dyeing, or coloring matters, manufacture of, C. Dulberg..... 366,078	Meter. See Grain meter.	Stage or scaffold bracket, J. F. Locke..... 365,830
Electric conductors, junction box for, J. Kruesi..... 366,173	Metallic fastening, F. Bean..... 365,898	Stalk cutting machine, T. H. Killingsworth..... 365,821
Electric distribution, system of, J. F. McElroy..... 366,124	Milk and creaming can, combined, D. H. Brown..... 366,148	Stand. See Convertible stand.
Electrical conductor, J. Kruesi..... 366,174	Mill. See Cider mill. Cider and wine mill.	Steam boiler, A. M. Coyle..... 365,971
Electrical distribution, system of, T. A. Edison..... 365,978	Mining purposes, drill for, W. H. Larimer..... 365,925	Steam engine, R. Creuzbaur..... 365,797
Electricity, apparatus for measuring, J. Cauderay..... 365,792	Money package, R. L. Choje..... 366,075	Steam engine, direct acting, M. N. & E. P. Lynn..... 365,122
Electro-magnetic motor, H. M. Paine..... 366,021	Mosaic work, E. Chatain..... 365,908	Steam generator, G. A. Karwiese..... 365,820
Elevator, A. Pitts..... 365,806	Motor. See Electro-magnetic motor. Gas motor.	Steam generator, J. C. Nichols..... 365,834
Elliptic spring, T. B. Chase..... 365,968	Mouse or rat trap, E. M. Murrill..... 365,848	Steam generator, J. Waters..... 365,889
End gate, J. B. Buntin..... 365,967	Mowing machine, V. G. Smith..... 365,946	Stone, etc., composition for artificial, J. Lorin..... 366,012
End gate, E. Haake..... 365,908	Mowing machine, G. G. Hunt..... 365,003	Stone sawing machine, J. Peckover..... 366,023
End gate, W. D. Hunt..... 366,107	Music recorder, V. S. Bekofsky..... 366,068	Stopper. See Bottle stopper.
End gate fastener, J. L. Hamner..... 365,992	Nail machine, wire, E. B. Parkhurst..... 365,855	Store service apparatus, I. Birge..... 366,145
Engine. See Steam engine.	Nail machine, wire, G. H. Ryan..... 365,944	Store service apparatus for twine, A. J. Chase..... 365,794
Engine, D. J. Dokey et al..... 366,079	Necklaces, memorial ornament for, W. H. Palmer..... 365,853	Stove door, J. W. Fowler..... 366,088
Envelope and tag, combined, M. L. & G. B. Whitney..... 366,054	Necktie fastener, E. B. Croker..... 366,156	Studs, machine for inserting lacing, H. A. Kingsland..... 366,115
Envelope machines, gum box for, F. H. Richards..... 366,186	Nut lock, D. Leake..... 365,828	Stump puller, C. Sauer..... 366,032
Envelope sticker, return, T. Weaver..... 365,890	Obstetrical instrument, C. A. Farnham..... 365,913	Supporter. See Abdominal supporter.
Feed cooker and scalding, combined, W. A. Steffa..... 366,042	Oil, process of refining and clarifying crude cotton seed, Hunt & Wilson..... 365,921	Switch. See Telephone switch.
Feeder, flock machine, H. M. Truesdell..... 366,137	Oven, baking, B. B. Van Derveer..... 366,138	Table. See Folding and adjustable table.
Fence, D. B. Gillespie..... 366,089	Pad. See Collar pad.	Teeth separator, S. G. Perry..... 366,025
Fence, Williams & Thomas..... 366,057	Pail, dinner, F. Maranville..... 365,834	Telegraph, printing, C. L. Healy..... 365,994
Fences, machine for constructing, J. A. McLealand..... 365,838	Paper box machine, A. Brehmer..... 366,146	Telegraph receiver, printing, Mahnken & Healy..... 366,178
Fender. See Bridge fender.	Paper box machine, F. L. Stone..... 365,879	Telegraph transmitter, printing, C. L. Healy..... 366,166
Fiber, machine for opening and preparing, J. N. Bourne..... 365,784	Paper, creasing and folding, F. H. Richards..... 366,188	Telegraphs, transmitter for printing, S. D. Field..... 366,982
File, E. A. Kittell (r)..... 10,847	Paper, machine for cutting and winding, W. W. Coley..... 365,796	Telephone lines, angle hanger for mechanical, A. W. S. Davis..... 365,798
Firearm, electrical breech-loading, E. A. Monfort..... 365,843	Paper tubing, manufacture of, W. H. Honiss..... 365,815	Telephone switch, mechanical, G. F. Shaver..... 365,868
Firearm sight, W. Lyman..... 366,121	Paper with sand, emery, etc., machine for coating, H. Slusser..... 366,037	Telephone system, police, Eckert & Seely..... 365,911
Fire escape, fire extinguisher, and elevator, J. L. MacDonald..... 365,833	Pen, fountain, J. Ullrich..... 365,953	Telephone transmitter, J. W. Bonta..... 365,776 to 365,781
Fire extinguisher, L. C. Kidd..... 365,922	Pen, fountain, V. Van De Mark..... 366,047	Telephony, electric, A. G. Safford..... 366,190
Fire extinguisher, automatic, J. C. Mackey..... 366,177	Pen holder, V. M. Harris..... 365,810	Thermometer, high temperature, W. F. Brewster..... 365,905
Fire extinguisher, low water, W. Reams..... 365,861	Pen holder, B. Lawrence..... 365,827	Thill coupling, Boozel & Mooney..... 365,782
Fires, compound for extinguishing, E. G. Penrose et al..... 366,126	Pencil clasp, W. H. Sherman..... 366,132	Tie. See Railway tie.
Flag staffs, etc., apparatus for repairing and extending, B. Vitalis..... 366,141	Perforating machine, G. A. Holm..... 366,104	Tin from tin plate and other materials, recovering, A. Lambotte..... 366,118
Flaxseed and grain separator, T. R. Rosier..... 365,893	Photographic apparatus, J. Baynes..... 365,897	Tobacco wringer and spreader, combined, A. U. Drayer..... 365,803
Flour packer, F. W. Howell..... 366,167	Photographic printing frame, L. F. Adt..... 366,060	Toboggan, C. H. Emerson..... 366,083
Folding and adjustable table, F. A. Blackmer..... 366,069	Pile, S. G. Hutchinson..... 365,816	Torpedo placer, railway, J. C. F. & L. K. Rishel..... 366,029
Food, bird, J. D. Heins..... 365,995	Pile for the manufacture of iron sheets, R. A. Carter..... 366,152	Trap. See Mouse and rat trap.
Frame. See Photographic printing frame.	Pin case, mechanical, C. M. Adams..... 366,059	Trousers and pattern therefor, W. W. Crisp..... 366,155
Fruit jar, H. L. Lovejoy..... 365,928	Pipe and flue connection, V. Bonzagni..... 365,783	Truck, J. G. Ringer..... 365,942
Furnace. See Baking furnace. Gas furnace. Hearth furnace.	Pipe cutter, C. C. Walworth..... 365,887	Tubes, art of welding the ends of metal, H. Jordan..... 365,819
Furnace, A. Backus, Jr..... 365,772	Pipe joints, pattern for, R. A. Robertson, Jr..... 365,943	Tubes, machinery for the manufacture of, F. Huggins..... 366,002
Furnace air regulator, F. C. Smith..... 366,098	Planters, dropper-actuating mechanism for, D. N. Baxter..... 366,144	Twine cutters, F. P. Hoeneman..... 366,102
Gauge. See Buttonhole marking gauge. Carpenter's gauge.	Plow, W. H. Green..... 366,090	Type writers, copy holder for, C. H. McGurrian..... 365,837
Galvanic battery, C. Seiler..... 366,034	Plow, J. T. Prior..... 366,128	Type writing machine, G. A. Fairfield..... 366,084
Garment, J. Holroyd..... 366,105	Plow, H. H. Sater..... 365,896	Vaginal expanding and cleansing instrument, M. G. Collins..... 365,969
Garment, reversible, H. L. Meltzer..... 365,841	Plow, sulky, M. T. Hancock..... 366,094	Valve, balanced, W. W. Lewis..... 365,927
Garter, F. Armstrong..... 365,770	Pneumatic dispatch, electric block system for, Bryson, Jr., & Mudge..... 365,787	Valve for beer and other vessels, tap, J. Inglish..... 366,028
Gas, apparatus for the manufacture of fuel and illuminating, J. Bujac..... 365,906	Police man's club, A. J. Bradish..... 365,904	Vaporizer for medicinal purposes, electrolytic, M. M. Gillam..... 366,164
Gas burner, F. G. Bielefeld..... 365,899	Pool table attachment, X. Margheri..... 366,123	Vehicle gear, J. N. Brown..... 365,786
Gas burner, C. M. Lungren..... 365,831	Pool tables, pocket frame clamp for, A. G. Nygard..... 365,849	Vehicle spring equalizer, T. D. Toy et al..... 365,884
Gas, composite burner for fuel, F. Barnhart..... 365,959	Post. See Hitching post.	Vehicle, steam road, J. H. Bullard..... 365,788
Gas furnace, J. H. Taylor..... 365,950	Potassium bichromate, making, W. Simon..... 366,036	Vehicle, two-wheeled, J. P. Barker..... 366,063
Gas generating machine, L. C. Huber..... 366,168	Potato digger, I. & E. Saltsman..... 365,855	Vehicle, two-wheeled, B. J. Healy..... 365,812
Gas, inlet for natural, T. Shelton..... 366,085	Potato digger, C. C. Stover..... 365,880	Vehicles, wear plate for, B. W. Beach..... 365,960
Gas machines, mechanism for driving, H. Allen..... 366,061	Potato digging machine, F. M. Thorn..... 366,044	Velocipede, J. R. Trigwell..... 366,045, 365,046
Gas motor, E. Korting..... 366,116	Press. See Copying press. Cotton press. Cotton and hay press. Seal press.	Vending apparatus, automatic, H. J. Ennis..... 365,912
Gas, obtaining hydrogen from water, H. H. Edgerton..... 366,081	Printing frames, folding rack for solar, J. Strachan..... 366,134	Vermin eradicator, C. Meeker..... 365,930
Gate. See End gate. Sliding or rolling gate.	Printing machines, sheet delivery apparatus for cylinder, S. D. Tucker..... 365,952	Watch case, R. E. Fennel..... 366,081
Gate, W. J. Pyle..... 365,860	Printing machines, tripping mechanism for cylinder, R. Miehle..... 365,931	Watch case, C. K. Giles..... 365,984 to 365,988, 365,990
Gate, G. Shine..... 365,870	Projectiles, machine for rolling, C. Fairbairn..... 365,980	Watch case bezel, W. Lang..... 365,825
Gate, H. W. Wilson..... 365,892	Protector. See Bedding protector.	Watch cases, process of manufacturing, W. Lang..... 365,826
Gearing, C. D. Harcastle..... 365,933	Puller. See Stump puller.	Watch dials, making enameled, E. C. Fitch..... 366,085
Generator. See Steam generator.	Pulp, sulphite solution for wood, C. A. Catlin..... 366,153	Water, apparatus for purifying, J. W. Hyatt..... 366,171
Glass, leet for annealing, Halsey & Miller..... 365,813	Pump, H. G. Bott..... 366,072	Water closet, G. H. Holgate..... 365,920
Governor, air current, S. P. Smith..... 365,945	Pump, S. W. Martin..... 365,885	Water closet, J. Park..... 365,937
Grain cradle, W. B. Smith..... 365,947	Pump, M. D. Temple..... 365,951	Water heater and circulator, combined, T. R. Chase..... 366,074
Grain meter, Springer & Kent..... 365,874 to 365,877	Rack. See Harness rack.	Water, injector for aeration of, J. W. Hyatt..... 366,169
Grapple, W. Potter..... 365,940	Railway construction, cable, Z. P. Boyer..... 365,964	Weatherboarding tool, G. W. Pelton..... 365,857
Grates, ash screen for, J. D. Vance..... 365,954	Railway crossings, signal for, E. Fontaine..... 366,086	Wells, device for operating the pumps of a group of oil, H. H. Noyes..... 366,125
Guard. See Sewing machine thread guard.	Railway tie, R. Morrell..... 365,932, 365,933	Wheel. See Car wheel.
Hame coupling, Franklin & Ryser..... 366,161	Railways, permanent way of, E. Samuel..... 366,081	Windmill, W. H. Goff..... 365,901
Handles, art of making hollow, W. W. Lee..... 365,829	Rake. See Hay rake.	Windmill, D. D. Walker..... 365,955
Hanger. See Broom hanger. Coat hanger.	Reaper, binder, and harvester, J. Bachman..... 365,771	Window, storm, O. G. Andrews..... 365,769
Harness loops, machine for forming, C. Pellissier..... 366,024	Recorder. See Music recorder.	Wire mats, frame for, C. C. Hill..... 366,098
Harness rack, suspension, W. H. Robinson..... 366,030	Reel. See Harvester reel.	Wire stretcher, J. B. Cleveland..... 366,076
Harrow, A. C. Evans..... 366,160	Refrigerator, C. A. Blumh..... 365,901	Wires, making heddle, J. H. Williams..... 366,056
Harrow, sulky, Benton & Godding..... 365,962	Regulator. See Furnace air regulator.	Wringer. See Tobacco wringer.
Harvester reel, G. G. Hunt..... 366,004	Relay, polarized, G. T. Woods..... 366,192	Yarn, finishing mixture for cotton, H. Adams..... 365,957
Harvesting machines, folding reel for, H. Kellogg..... 366,114	Remedy for rheumatism, E. E. Burnett..... 366,149	Yarn from the chain, machine for spooling, J. Stone..... 365,949
Hat sizing machine, S. C. Palmer..... 365,852	Road and ditching machine, direct-draught, H. C. Moore..... 365,845 to 365,847	Yoke, neck, P. Walker..... 365,886
Hats, machine for pressing straw, S. Beatty..... 366,066	Roaster. See Coffee roaster.	
Hats, pressing straw, S. Beatty..... 366,067	Rock drill, electric, L. J. Phelps..... 366,184	
Hatchway operating device, P. Byrne..... 365,791	Roller. See Land roller.	
Hay rake and stacker, B. Mason..... 366,016	Rollers, adjusting cam, F. H. Richards..... 366,189	
Head rest, folding, W. C. Doubleday..... 366,080	Rolling mills, conductor for, F. G. Tallman..... 366,186	
Heater. See Car heater. Water heater.	Ruler and calendar, combined, A. S. Goodrich..... 365,916	
Hearth furnace, open, D. E. Park et al..... 365,936	Ruling machine and printing press, combined, J. Dale..... 365,972	
Hinge, clamp, Andrews & Burnap..... 366,143	Salt, apparatus for the manufacture of, R. G. Peters..... 366,026	
Hinge, lock, E. C. Byam..... 366,151	Salt rolls, machine for compressing, J. Macdonald..... 366,175	
Hinge pin and other holes, means for forming, Keep & Jamieson..... 366,113	Sandpapering machine, G. L. Knauss..... 366,009	
Hinge, watch case, C. K. Giles..... 365,989	Sawback, adjustable, H. E. Moriarty..... 366,017	
Hitching device, line, A. J. Brouillard..... 365,965	Sawing machine, portable, P. R. Gottstein..... 365,917	
Hitching post, A. A. Wheelock..... 366,052	Scarf neckbands, tip for, L. C. F. Frees..... 366,162	
Holder. See Bedclothes holder. Pen holder.	Scraper, road, C. E. Kilpatrick..... 365,923	
Hook. See Coat and hat hook. Lacing hook.	Screw, G. B. N. Dow..... 366,158	
Horn tip, N. E. Parks..... 365,856	Sectional boiler, L. De Naeyer..... 365,801	
Horseshoe nails, tool for clinching, J. W. Delano..... 365,974	Seal press, C. C. Abbe..... 366,193	
Hydrant, Bardo & Ford..... 365,896	Seesaw, H. R. Edmonds..... 366,082	
Hydrocarbon fuel, furnace for burning, J. H. Bulard..... 365,789, 365,790	Separator. See Flaxseed and grain separator.	
Ingot in a sectional mould, apparatus for forming steel, J. B. D. Boulton..... 365,902	Teeth separator.	
Iron chair, A. O. Hozberg..... 365,999	Sewing machine, buttonhole, C. S. Jordan..... 366,006	
Ironing and polishing machine, A. T. Hagen..... 366,092	Sewing machine cording attachment, W. F. Brooks et al..... 366,147	
Jar. See Fruit jar.	Sewing machine driving mechanism, J. G. Greene..... 365,918	
Key fastener, J. Busfield..... 366,150	Sewing machine feeding device, G. F. Wilson..... 365,956	
Knob attachment, C. E. Steller..... 365,878	Sewing machine thread guard, M. E. Chapman..... 365,793	
Knob spindles, fastening for, J. J. Bennett..... 365,775	Sheeting mechanism, F. H. Richards..... 366,187	
Lacing hook or stud, H. A. Kingsland..... 365,822	Sheet materials, machine for uniting, Holman & Bean..... 366,001	
Lamp, L. Henkle..... 365,996	Sheet metal vessel, F. A. Walsh..... 366,049	
Lamp standard, C. Maschmeyer..... 366,014	Shoes, manufacture of, S. W. Wardwell, Jr..... 365,888	
Lamps, wick holding attachment for, De Bondini & Seefelder..... 365,973	Shovel, J. Hinchman..... 366,099	
Land roller, H. M. Bailey..... 365,773	Shutter fastener, Cochard & Gano..... 365,735	
Lantern, J. W. Orphy..... 366,020	Sifter, ash, J. L. Barrows..... 366,065	
Lantern, tubular, D. C. Kline..... 366,008	Signal box, H. A. Chase..... 366,154	
Leather, composition for cleaning, blacking, and oiling of, H. C. Parker..... 365,854	Silver from its ores by lixiviation, extracting, O. Hofmann..... 366,103	
Leather softening or staking machine, A. M. Bowers..... 365,963	Siphon or spigot extension or shank, W. A. Bond..... 366,070	
Leggin, child's, S. Rauh..... 365,941	Sliding or rolling gate, R. S. & W. W. Higgins..... 366,097	
Lighting, refractory filament for, C. M. Lungren..... 365,832	Spark arrester, J. H. Swartzbaugh..... 366,135	
Lock. See Nut lock.	Splintoon, hearth, W. D. Smith..... 365,872	
Looms for weaving double pile fabrics, let-off mechanism for, C. Coupland..... 365,910	Splints, manufacture of, J. E. Lee..... 366,120	
Lubricator. See Axle lubricator.	Spool, O. Cate..... 366,073	

Advertisements.

Inside Page, each insertion - - - 25 cents a line.
Back Page, each insertion - - - \$1.00 a line.

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisement at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

SEBASTIAN, MAY & CO'S
Improved Screw Cutting
LATHES Foot & Power \$60.

Drill Presses, Chucks, Drills, Dogs, and machinists' and amateurs' outfits. Lathes on trial. Catalogues mailed on application.
165 W. 2d St., Cincinnati, O.

SUPERIOR
Stationary Engines
with Plain and Automatic Cut-off. Vertical and Horizontal.
Penna. Diamond Drill Co., Birdsboro, Pa.

PROPULSION OF STREET CARS.
A paper by A. W. Wright, in which an endeavor is made to solve the problem as to the amount of power required to start a street car and keep it in motion under average conditions. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 533. Price 10 cents. To be had at this office and from all newsdealers.

Syracuse Malleable Iron Works

ELECTRICAL. Edward P. Thompson, Solicitor of Electrical Patents, 3 Beekman Street, N. Y. Write for testimonials and instructions.

WHY DOES STEEL HARDEN?—BY
William Metcalf, C.E. An interesting paper showing what has thus far been done in the way of gathering facts preparatory to an attempt to determine what are the chemical or physical changes that occur in the phenomena of hardening, tempering and annealing of steel. Full details of the experiments made by the author and others during the last five years, and statements of the results obtained. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 223 and 224. Price 10 cents each. To be had at this office and from all newsdealers.

EXCELLENT BLACK COPIES of anything written or drawn with any Pen (or Type Writer) by the Patent
AUTOCOPYIST Lithography. Specimens Free.
AUTOCOPYIST CO., 166 William Street, New York.

THE COPYING PAD.—HOW TO MAKE
and how to use; with an engraving. Practical directions how to prepare the gelatine pad, and also the aniline ink by which the copies are made; how to apply the written letter to the pad; how to take off copies of the letter. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 438. Price 10 cents. For sale at this office and by all newsdealers in all parts of the country.

THE CHEAPEST AND BEST
Photo Engraving Co.
67 PARK PLACE, NEW YORK
ENGRAVING FOR ALL ILLUSTRATIVE AND ADVERTISING PURPOSES

2d HAND MACHINERY Lists sent. N.Y. Machinery Depot, Bridge Street No. 15, Frankfort Street, N. Y.

FIRE-BRICK.—BY R. A. COOK, A.M.
An interesting description of the mining of fire clay and the manufacture of fire brick at Mt. Savage, Maryland where is located one of the largest establishments in the country devoted to this industry. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 535. Price 10 cents. To be had at this office and from all newsdealers.

MALLEABLE AND FINE GRAY IRON ALSO STEEL
THOMAS DEVLIN & CO. FINE TUNING JAPANNING AND FINISHING
LEHIGH AVE. & AMERICAN ST. PHILA.

ON STEAM BOILERS.—A LECTURE
by J. M. Allen, delivered in the Sibley College course. The steam boiler, its construction and management. Different types of boilers. Material. Methods of riveting. Fractures. Boiler explosions. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 533. Price 10 cents. To be had at this office and from all newsdealers.

Corrugated Copper Gaskets.
(patented), used in place of rubber or other destructible packings for connecting flange pipes, cylinder heads, steam chests, etc. This gasket is not injured by steam, oil, or acid solutions. U. S. Mineral Wool Company, 22 Cortlandt St., N. Y.


ALCOHOL, SWEET POTATO.—AN
account of a new industry recently established at the Azores—that of the distillation of alcohol from raw sweet potatoes. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 572. Price 10 cents. To be had at this office and from all newsdealers.

ON THE HYGIENIC AND THERAPEUTIC
Influences of Habits and Character in the Medical Profession.—By Edw. T. Tibbitts, M.D. In this paper the author points out to the profession the immense power they possess of working either harm or good to their patients through their own personal habits or their influence; and with a knowledge of how powerful this influence is he counsels that they should endeavor to lead as nearly as possible model lives—lives which will not only bear but court imitation. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 211. Price 10 cents. To be had at this office and from all newsdealers.

PERFECT
NEWSPAPER FILE

The Koch Patent File, for preserving newspapers, magazines, and pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can be supplied for the low price of \$1.50 by mail, or \$1.25 at the office of this paper. Heavy board sides; inscription "SCIENTIFIC AMERICAN" in gilt. Necessary for every one who wishes to preserve the paper.
Address
MUNN & CO.,
Publishers SCIENTIFIC AMERICAN.

THE ONLY PRACTICAL
ELECTRIC MOTORS
FOR FAMILY SEWING MACHINES
THE ELECTRO-DYNAMIC CO. PHILA. PA.
224 CARTER ST. PHILA. PA.



Immisch's Avitrous Clinical Thermometer
IN SILVER OR GOLD.
The Best Thermometer in the World.
Easy to read and easy to use, but not easy to break. Will never vary with age, like the glass thermometers. Absolutely correct, and guaranteed to the fraction of a degree by Kew Observatory Certificates. Sold by the Surgical Instrument Dealers, Opticians, and Druggists throughout the United States and Canada. At Wholesale by SARDY, COLES & CO., owners of the U. S. Patent, 36 & 38 Maiden Lane, New York.

SCIENTIFIC BOOK CATALOGUE, JUST PUBLISHED.

Our new catalogue containing over 100 pages, including works on more than fifty different subjects. Will be mailed free to any address on application.

MUNN & CO., Publishers Scientific American, 361 Broadway, New York.

PATENTEES and manufacturers of novelties for their interest to communicate with me. Address, "COMMISSION MERCHANT," P. O. Box 773, N.Y. City.



PROSPECTUS OF THE Scientific American FOR 1887.

The Most Popular Scientific Paper in the World. Only \$3.00 a Year, including Postage. Weekly. 52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. All Classes of Readers find in the SCIENTIFIC AMERICAN a popular resume of the best scientific information of the day; and it is the aim of the publishers to present it in an attractive form, avoiding as much as possible abstruse terms. To every intelligent mind, this journal affords a constant supply of instructive reading. It is promotive of knowledge and progress in every community where it circulates.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for one year—52 numbers—postage prepaid, to any subscriber in the United States or Canada, on receipt of three dollars by the publishers; six months, \$1.50; three months, \$1.00.

Clubs.—One extra copy of the SCIENTIFIC AMERICAN will be supplied gratis for every club of five subscribers at \$3.00 each; additional copies at same proportionate rate.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to

MUNN & CO.,
361 Broadway, New York.

THE Scientific American Supplement.

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archaeology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information pertaining to these and allied subjects is given, the whole profusely illustrated with engravings.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are represented and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, \$5.00 a year, or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for \$7.00. Address and remit by postal order, express money order, or check.

MUNN & CO., 361 Broadway, N. Y.,
Publishers SCIENTIFIC AMERICAN.

To Foreign Subscribers.—Under the facilities of the Postal Union, the SCIENTIFIC AMERICAN is now sent by post direct from New York, with regularity, to subscribers in Great Britain, India, Australia, and all other British colonies; to France, Austria, Belgium, Germany, Russia, and all other European States; Japan, Brazil, Mexico, and all States of Central and South America. Terms, when sent to foreign countries, Canada excepted, \$4. gold, for SCIENTIFIC AMERICAN, one year; \$9. gold for both SCIENTIFIC AMERICAN and SUPPLEMENT for one year. This includes postage, which we pay. Remit by postal or express money order, or draft to order of MUNN & CO., 361 Broadway, New York.

CURE FOR THE DEAF


PECK'S PATENT IMPROVED CUSHIONED EAR DRUMS Perfectly Restore the Hearing, and perform the work of the natural drum. Invisible, comfortable and always in position. All conversation and even whispers heard distinctly. Send for illustrated book with testimonials, FREE. Address on call on F. HUSCOX, 853 Broadway, New York. Mention this paper.

PILES. Instant relief. Final cure and never returns. No incision. Neither knife, purge, salve or suppository. Liver, kidney and all bowel troubles—especially constipation—cured like magic. Sufferers will learn of a simple remedy free, by addressing, J. H. REEVES, 78 Nassau St., N. Y.



us as long as you live. Fact!

MAHER & GROSH, 40 S Street, Toledo, Ohio.



LIGHT DRAFT STEAM LAUNCHES. COAL AND WOOD BURNING.

Small Marine and High Speed Engines, also Patent Steel Tubular Boilers. Patent Automatic Adjustable SKAG.

MANUFACTURED BY
H. B. WILLIAMS & CO., Rochester, N. Y., U. S. A.

TO CAPITALISTS.

The proprietor of an Extensive Machine Works, Foundry, &c., located at one of the most enterprising, prosperous, and healthy cities in North Georgia, desires to correspond with a party with Capital, with a view to a business arrangement.

These works command a large trade, have several valuable specialties, and have now contracts on hand even beyond their capacity, and daily refusing orders and contracts amounting to thousands of dollars. The proprietor desires to increase the capacity of the works, so as to do all the work offered, but lacks capital, therefore would be pleased to communicate with a party with means, with whom a favorable arrangement would be made. Address "PROGRESS," P. O. Box 773, New York.

ROSE POLYTECHNIC INSTITUTE, TERRE HAUTE, IND. | A School of Engineering.

Well endowed, well equipped departments of Mechanical and Civil Engineering, Electricity, Chemistry and Drawing. Extensive Shops and Laboratories. For Catalogue, address T. C. MENDEHALL, Pres.

TELESCOPIC OBJECTIVES AND MIRRORS.

Their preparation and testing. By H. Grubb, F. R. S. An interesting description of the processes now employed in the construction of telescopic objectives, prefaced with a short history of the manufacture of glass. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 548 and 549. Price, 10 cents each. To be obtained at this office or from any newsdealer.


GAS MOTORS. — DESCRIPTION, ACCOMPANIED BY EIGHT FIGURES, SHOWING DETAILS OF WORKING PARTS OF A SYSTEM OF SMALL GAS MOTORS AS MADE BY BUSS, SOMMART & CO.

Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 265. Price 10 cents. To be had at this office and from all newsdealers.

STEAM ROAD ROLLERS

Manufactured by
Foundry and Machine Dept.,
Harrisburgh, Pa.

VULCANITE EMERY WHEELS.



Large Wheels made on Cast Iron Centers if desired. Knife Grinding Wheels a Specialty.

Warehouse: 15 Park Row, New York.

AGENTS: PERSICANER & CO., Pickhuben 5, Hamburg.

Made SOLID of the Celebrated
WELLINGTON MILLS EMERY.

SUPERIOR TO ALL OTHERS.

Thousands of manufacturers testify to its being the Strongest, most Durable, and Healthiest Emery Wheel made.

RUNS WET or DRY.

CUTS COOL and FREE.

A SAFE WHEEL.

NEW YORK BELTING & PACKING CO.,
Sole Manufacturers.


Shafting and Gearing, Textile Machinery, ELEVATORS, ETC.

THOS. WOOD & CO.
222 and Wood Sts.,
Philadelphia, Pa.

ELECTRIC CONVEYORS.—DESCRIPTION of two ingenious systems for the electric carriage of small packages. Illustrated with 13 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 464. Price 10 cents. To be had at this office and from all newsdealers.

CIVIL, MECHANICAL AND MINING ENGINEERING at the Rensselaer Polytechnic Institute, Troy, N. Y.

The oldest engineering school in America. Next term begins September 14th. The Register for 1887 contains a list of the graduates for the past 62 years, with their positions, also course of study, requirements, expenses, etc. Address
DAVID M. GREENE, Director.



Address: The American Writing Machine Co., Hartford, Conn.; New York Office, 237 Broadway.

ICE-HOUSE AND REFRIGERATOR.

Directions and Dimensions for construction, with one illustration of cold house for preserving fruit from season to season. The air is kept dry and pure throughout the year at a temperature of from 34° to 38°. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. 116. Price 10 cents. To be had at this office and of all newsdealers.

VALUABLE PATENT FOR SALE.

For particulars write to the ADAMSON CO. (Agents for Selling Patents), Muncie, Indiana.

CAPILLARY TUBES, SPONTANEOUS

Motion in.—A paper by C. Decharme upon the application of electricity to the study of the spontaneous ascension of liquids in capillary tubes—the question being studied from a dynamic standpoint. With 10 engravings of apparatus and details. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 538. Price 10 cents. To be had at this office and from all newsdealers.

The New Catalogue of Valuable Papers

contained in SCIENTIFIC AMERICAN SUPPLEMENT, sent free of charge to any address.
MUNN & CO., 361 Broadway, N. Y.


OUR PRIDE. The Pattern Maker. Has two inches marked by eight lines on the large blade; oil-tempered, rather hard, made for severe use. The small blade is one to please mechanics. Ebony handle, metal ends. Price \$1.00; but for 30 days we will sell for \$3.00, post-paid. Remit in what is most convenient. Send for our 48-page illustrated list, free also. "How to Use a Razor." If we sell you one knife, you will buy of

SOLID EMERY WHEELS.—BY T. D. PARET.

Early forms of emery wheels and their defects. Vulcanite wheels. The tanite wheels. Testing of tanite wheels at Stroudsburg. Best working speeds for emery wheels. Bursting of emery wheels. Tests for emery wheels. Comparative merits of American and English emery wheels. With 2 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 538. Price 10 cents. To be had at this office and from all newsdealers.

SHIELDS & BROWN

Manufacturers and Sole Proprietors of



For BOILERS and STEAM PIPES

Reduces Condensation of Steam.

FOR GAS AND WATER PIPES.

Prevents Sweating and Freezing.

The Best Non-Conductor of Heat and Cold in the World

Send for illustrated descriptive Circular, and name this paper.

143 Worth Street, New York.

78 and 80 Lake Street, Chicago.

USEFUL BAGS AND HOW TO MAKE THEM.

A paper by J. T. Humphrey, giving full directions for making hand, brief, cricket and other bags from leather, with four illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 561. Price 10 cents. To be had at this office and from all newsdealers.

Proposals for Steel-cast Guns for the Navy.

NAVY DEPARTMENT,
WASHINGTON, D. C., June 23, 1887.

Under authority conferred by the act of Congress, approved March 3, 1887, making an appropriation "for the purchase and completion of three steel-cast, rough-bored and turned, six-inch, high-power rifle cannon, of domestic manufacture, one of which shall be of Bessemer steel, one of open-heart steel, and one of crucible steel," sealed proposals from domestic manufacturers, to furnish the same, will be received at this Department until Tuesday, the second day of August, 1887, at 12 o'clock noon, at which time the proposals will be opened.

Proposals may be made either to furnish three completely finished six-inch, breech-loading, high-power rifle cannon, made from unforged castings, one of Bessemer steel, one of open-heart steel, and one of crucible steel, or three unforged, rough-bored and turned castings for such cannon, of the same material, respectively, to be finished by the Department in accordance with the bidder's design.

Such finished guns or such castings must be in accordance with the specifications prepared in the Bureau of Ordnance, and each gun, when completed, must be capable of safely discharging projectiles weighing 100 pounds each, with a muzzle velocity of not less than 2,000 feet per second.

No gun or casting for a gun will be paid for until the gun "shall have been completed and have successfully stood the statutory test required by the act of July twenty-sixth, eighteen hundred and eighty-six," entitled "an act making appropriations for the naval service for the fiscal year ending June thirtieth, eighteen hundred and eighty-seven, and for other purposes."

Proposals may be made separately for one or more guns or for one or more castings as aforesaid, but no proposal will be considered unless accompanied by satisfactory evidence that the bidder controls a plant adequate to the production of the gun or guns, casting or castings, which he proposes to furnish.

Each successful bidder will be required to execute, within fifteen days after notice of award, a formal contract in accordance with his proposal, and to furnish a bond, with satisfactory sureties, in a penal sum equal to fifteen per cent. of the amount of his bid, conditioned for the faithful performance of such contract.

Copies of the specifications, with blank forms of proposals, and all additional information desired, can be obtained on application to the Bureau of Ordnance, Navy Department.

All proposals must be in duplicate, inclosed in envelopes marked "Proposals for Steel-cast Cannon," and addressed to the Secretary of the Navy, Navy Department, Washington, D. C.

The right is reserved to waive defects in form and to reject any or all bids.

WILLIAM C. WHITNEY,
Secretary of the Navy.

PATENT for sale, U. S. and Canadian. Valuable, cheap. JAMES F. MORTON, Newton Centre, Mass.



GEO. W. MARBLE, Sole Manufacturer of THE ACME WRENCH.

The best made, all steel, and warranted, 5 sizes.


28 to 32 South Canal Street, Chicago, U. S. A.

FOR SALE.

One 10x30 Wheelock Automatic Cut-off Engine, recently rebuilt. One 48x16 ft. tubular boiler, pump, heater, steam and exhaust pipes, all complete and but little used. Will be sold cheap. Address box 366, New Haven, Conn.

Water Wheels New and Second Hand

Address FLENNIKEN TURBINE CO., Dubuque, Iowa.



Any one can take good Photographs. Outfits \$10. and upward.

SEND FOR A COPY OF MODERN PHOTOGRAPHY AND OUR ILLUSTRATED CATALOGUE.

ROCHESTER OPTICAL CO.,
21 ADELBERT ST., ROCHESTER, N.Y.

WELL

Encyclopedia of 700 Engravings of WELL TOOLS, Diamond Drills and Lighting Hydraulic Wells, Book free, 25c. for mailing it. American Well Works, Aurora, Ill.

FOREIGN PATENTS.

Their Cost Reduced.

The expenses attending the procuring of patents in most foreign countries having been considerably reduced the obstacle of cost is no longer in the way of a large proportion of our inventors patenting their inventions abroad.

CANADA.—The cost of a patent in Canada is even less than the cost of a United States patent, and the former includes the Provinces of Ontario, Quebec, New Brunswick, Nova Scotia, British Columbia, and Manitoba.

The number of our patentees who avail themselves of the cheap and easy method now offered for obtaining patents in Canada is very large, and is steadily increasing.

ENGLAND.—The new English law, which went into force on Jan. 1st, 1885, enables parties to secure patents in Great Britain on very moderate terms. A British patent includes England, Scotland, Wales, Ireland and the Channel Islands. Great Britain is the acknowledged financial and commercial center of the world, and her goods are sent to every quarter of the globe. A good invention is likely to realize as much for the patentee in England as his United States patent produces for him at home, and the small cost now renders it possible for almost every patentee in this country to secure a patent in Great Britain, where his rights are as well protected as in the United States.

OTHER COUNTRIES.—Patents are also obtained on very reasonable terms in France, Belgium, Germany, Austria, Russia, Italy, Spain (the latter includes Cuba and all the other Spanish Colonies), Brazil, British India, Australia, and the other British Colonies.

An experience of FORTY years has enabled the publishers of THE SCIENTIFIC AMERICAN to establish competent and trustworthy agencies in all the principal foreign countries, and it has always been their aim to have the business of their clients promptly and properly done and their interests faithfully guarded.

A pamphlet containing a synopsis of the patent laws of all countries, including the cost for each, and other information useful to persons contemplating the procuring of patents abroad, may be had on application to this office.

MUNN & CO., Editors and Proprietors of THE SCIENTIFIC AMERICAN, cordially invite all persons desiring any information relative to patents, or the registry of trade-marks, in this country or abroad, to call at their offices, 361 Broadway. Examination of inventions, consultation, and advice free. Inquiries by mail promptly answered.

Address, MUNN & CO.,
Publishers and Patent Solicitors,
361 Broadway, New York.

BRANCH OFFICES: No. 622 and 624 F Street, Pacific Building, near 7th Street, Washington, D. C.

OTTO GAS ENGINE AGENCY, NEW YORK.

A. C. MANNING & CO., 47 Dey Street

Removes on May 1st to 18 VESEY STREET.

ICE & REFRIGERATING


Machines. York Patent. YORK MFG. CO., York, Pa.

Advertisements.

Inside Page, each insertion --- 25 cents a line.
Back Page each insertion --- \$1.00 a line.
The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

W. L. DOUGLAS
\$3 SHOE.

The only \$3 SEAMLESS Shoe in the world.
Finest Calf, perfect fit, and warranted. Congress, Button and Lace, all styles toe. As stylish and durable as those costing \$5 or \$6.
W. L. DOUGLAS \$2.50 SHOE excels the \$3 Shoes advertised by other firms.



Boys all wear the W. L. DOUGLAS \$2 SHOE. If your dealer does not keep them, send your name on postal to W. L. DOUGLAS, Brockton, Mass.

OUTLINES OF A NEW ATOMIC THEORY.—A paper by Dr. T. L. Phipson, putting forth a new atomic theory, which does not necessitate any great change in the nomenclature or teaching of chemistry. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 565. Price 10 cents. To be had at this office and from all newsdealers.

INFORMATION
For Users of Steam Pumps.
Van Duzen's Patent Steam Pump
Requires No Packing or Oil. Is Reliably and Easily Operated. Can pump any kind of liquid; ever-ready; no moving parts; all brass; cannot clog nor get out of order; fully tested; hundreds in daily use; every pump guaranteed; not like cheap Pumps made of iron; all sizes to 8 inch discharge; prices from \$7 upward; capacities from 100 to 20,000 gallons per hour. State for what purpose wanted and send for Catalogue of "Pumps."
VAN DUZEN & TIFT, Cincinnati, O.

DRIVING-BELTS.—A PAPER BY John Tullis, discussing the comparative value of various kinds of belting. Main driving-belts. Patent leather chain belting. Half-twist belts. Cotton belts. Leather ropes. With 3 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 542. Price 10 cents. To be had at this office and from all newsdealers.



AIR PUMP, AN INEXPENSIVE.—BY G. M. Hopkins. Directions for making an efficient air pump for both exhaustion and compression, from materials costing one dollar and fifty cents, and with the expenditure of not more than two or three hours' labor. With 20 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 569. Price 10 cents. To be had at this office and from all newsdealers.

LEPAGE'S
THE ONLY GENUINE
LIQUID GLUE
UNEQUALLED for CEMENTING wood, glass, china, paper, leather, &c. Always ready for use. Pronounced strongest glue known.
(IS MADE BY THE) AWARDED TWO GOLD MEDALS.
Russia Cement Co., Sample 20c stamps

CAPILLARY ATTRACTION.—AN INTERESTING paper by William Thomson, discussing the question whether the attraction between any particle of matter in one body and any particle of matter in another continues to vary inversely as the square of the distance, when the distance between the nearest points of the two bodies is diminished by various degrees. With 30 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 562 and 563. Price 10 cents each. To be had at this office and from all newsdealers.

MODEL and EXPERIMENTAL WORK SPECIALTY.
Send for Circulars.
C. E. Jones & Bro.
CINCINNATI, O.
(Mention this Paper.)

THE NEW CROTON AQUEDUCT.—Detailed description of the great aqueduct now being constructed to increase the water supply of New York City, and also of the great dam which it is proposed to build across the Croton River, at Quaker Bridge. With engravings and a map. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 558. Price 10 cents. To be had at this office and from all newsdealers.

PATENTS.

MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had forty-one years' experience, and now have unequalled facilities for the preparation of Patent Drawings, Specifications, and the prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs. Munn & Co. also attend to the preparation of Caveats, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business entrusted to them is done with special care and promptness, on very reasonable terms.

A pamphlet sent free of charge, on application, containing full information about Patents and how to procure them; directions concerning Labels, Copyrights, Designs, Patents, Reissues, Infringements, Assignments, Rejected Cases, Hints on the Sale of Patents, etc.

We also send, free of charge, a Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world.

MUNN & CO., Solicitors of Patents,
361 Broadway, New York.
BRANCH OFFICES.—No. 622 and 624 F Street, Patent Building, near 7th Street, Washington, D. C.



CLARK'S NOISELESS RUBBER WHEELS
No more Splintered Floors.
Different Styles. Catalogue Free.
GEO. P. CLARK,
Box L. Windsor Locks, Ct.

THE AMERICAN BELL TELEPHONE CO.
95 MILK ST. BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use, and all the consequences thereof, and liable to suit therefor.

TUNNEL FOR FOOT PASSENGERS IN Stockholm.—Description of a difficult piece of tunneling, in which the freezing method was applied with success. With 7 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 542. Price 10 cents. To be had at this office and from all newsdealers.

ELECTRIC LEATHER BELTING
BEST and most RELIABLE for swift running.
Chas. A. Schieren & Co.
47 Ferry St., New York.
416 Arch St., Phila.
86 Federal St., Boston.

ASPHALT MASONRY FOR ENGINE BEDS.—By L. Malo. Description of the author's system of bituminous masonry beds, to deaden the vibrations produced by steam engines. With 5 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 581. Price 10 cents. To be had at this office and from all newsdealers.

TIGHT & SLACK BARREL MACHINERY
A SPECIALTY
JOHN GREENWOOD & CO.
ROCHESTER N. Y.

ROCK BREAKERS AND ORE CRUSHERS.
We manufacture and supply at short notice and lowest rates, Stone and Ore Crushers, containing the invention described in Letters Patent issued to Eli W. Blake, June 15th, 1858, together with NEW AND VALUABLE IMPROVEMENTS, for which Letters Patent were granted May 11th and July 20th, 1880, to Mr. S. L. Marsden. All Crushers supplied by us are constructed under the superintendence of Mr. Marsden, who, for the past twenty years, has been connected with the manufacture of Blake Crushers in this country and England.
FARREL FOUNDRY AND MACHINE CO., Manuf'rs., Ansonia, Conn.
COPELAND & BACON, Agents, NEW YORK.

AMATEUR SMITH'S WORK.—A CONDENSED description of the various smith's tools and their uses, together with a few practical hints on the management of iron and steel. With 62 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 589. Price 10 cents. To be had at this office and from all newsdealers.

FOR SALE. Valuable Patented Novelty for family use. Desire to sell outright, or arrange to have manufactured on royalty. Address JOHN M. PHASE (Room 38), 157 La Salle Street, Chicago.

NEW ANTISEPTIC COMPOUND.—Description, by Prof. A. Barff, of an antiseptic compound recently discovered by him, and an account of his successful experiments in preserving food with it. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 532. Price 10 cents. To be had at this office and from all newsdealers.

USEFUL BOOKS.

Manufacturers, Agriculturists, Chemists, Engineers, Mechanics, Builders, men of leisure, and professional men, of all classes, need good books in the line of their respective callings. Our post office department permits the transmission of books through the mails at very small cost. A comprehensive catalogue of useful books by different authors, on more than fifty different subjects, has just been published for free circulation at the office of this paper. Subjects classified with names of author. Persons desiring a copy, have only to ask for it, and it will be mailed to them. Address, MUNN & CO., 361 Broadway, New York.

CARBOLIC ACID.—AN INTERESTING paper by Frank French, M.D., treating of the history of carbolic acid, the mode of manufacturing it, and its uses as a therapeutic agent, anæsthetic and dentifrice, its effect upon animal organisms, and the antidotes for it in cases of poisoning. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 438. Price 10 cents. To be had at this office and from all newsdealers.

EPPS'S
GRATEFUL—COMFORTING.
C O C O A

EXPERIMENTS IN ACOUSTICS.—A valuable paper containing accounts of an interesting series of acoustical experiments made by Mr. A. C. Egert, to show how sound may be propagated and improved by the use of steel plates and wires, and the principle involved in which is believed to be capable of development and application to the improvement of sound in buildings not properly planned for that purpose. The system has the advantage of simplicity and readiness of application; it is not cumbersome or unsightly, and need not interfere with architectural arrangements. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 247. Price 10 cents. To be had at this office and from all newsdealers.

SHAFTING, PULLEYS,

The Original Unvulcanized Packing
CALLED THE STANDARD—As it is the Packing by which all others are compared.
Accept no packing as JENKINS PACKING unless stamped with our "Trade Mark."
JENKINS BROS.
71 John Street, N. Y.
105 Milk Street, Boston.
18 So. Fourth St., Phila.
54 Dearborn St., Chicago.

PATENT
JACKET KETTLES,
P1 in or Porcelain Lined. Tested to 100 lb. pressure. Send for Lists.
HAND, BURR & CO.,
614 and 616 Market St., Philadelphia, Pa.

To Business Men.
The value of the SCIENTIFIC AMERICAN as an advertising medium cannot be overestimated. Its circulation is many times greater than that of any similar journal now published. It goes into all the States and Territories, and is read in all the principal libraries and reading rooms of the world. A business man wants something more than to see his advertisement in a printed newspaper. He wants circulation. This he has when he advertises in the SCIENTIFIC AMERICAN. And do not let the advertising agent influence you to substitute some other paper for the SCIENTIFIC AMERICAN, when selecting a list of publications in which you decide it is for your interest to advertise. This is frequently done, for the reason that the agent gets a larger commission from the papers having a small circulation than is allowed on the SCIENTIFIC AMERICAN.
For rates see top of first column of this page, or address
MUNN & CO., Publishers,
361 Broadway, New York.

THE USE OF TORPEDOES IN WAR.—A paper by Commander E. P. Gallert, U.S.N., giving a clear presentation of the present state of efficiency of the torpedo, the degree of perfection that it has now reached, and describing the kinds which are in ordinary use in all naval services. With 3 plates, containing many figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 536 and 537. Ten cents each. To be had at this office and from all newsdealers.

CARY & MOEN
STEEL WIRE OF EVERY DESCRIPTION
234 W. 29 ST. EVERY & STEEL SPRINGS. NEW YORK CITY

GEOLOGY OF NATURAL GAS.—BY Chas. Ashburner.—Conditions under which natural gas occurs. The antinatural theory. Opinion as to the duration of the supply. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 543. Price 10 cents. To be had at this office and from all newsdealers.

Barnes' Foot-Power Machinery.
Complete outfits for Actual Workshop Business. Read what a customer says: "Considering its capacity and the accuracy of your No. 4 Lathe, I do not see how it can be produced at such low cost. The velocipede foot-power is simply elegant. I can turn steadily for a whole day and at night feel as little tired as if I had been walking around." Descriptive Catalogue and Price List Free. W. F. & JOHN BARNES Co. Address 1369 Main St., Rockford, Ill.


PRICE REDUCED.
ASBESTOS
ROOFING
FIRE AND WATER-PROOF BUILDING FELT, FIRE-PROOF PAINTS, STEAM PACKINGS, BOILER COVERINGS, ETC.
Samples and descriptive Price List free by mail.
H. W. JOHNS MFG CO., 87 MAIDEN LANE, N. Y.

THE GREAT AQUEDUCT OF NEW YORK CITY.—Largely and very complete account of the great aqueduct now being built by the City of New York, to increase its water supply. With 6 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 558 and 560. Price 10 cents each. To be had at this office and from all newsdealers.

ARMATURES.—A PAPER BY R. FUGE describing the usual method of winding armatures. With 7 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 559. Price 10 cents. To be had at this office and from all newsdealers.

WITHERBY, RUGG & RICHARDSON, Manufacturers of Patent Wood Working Machinery of every description. Facilities unsurpassed. Shop formerly occupied by R. Ball & Co., Worcester, Mass. Send for Catalogue.

GENESIS OF THE ELEMENTS.—A review of Mr. Crooke's theory of the subject. With one illustration. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 589. Price 10 cents. To be had at this office, and from all newsdealers.



VOLNEY W. MASON & CO.,
FRICTION PULLEYS CLUTCHES and ELEVATORS
PROVIDENCE, R. I.

COMPRESSION OF AIR.—DESCRIPTION of Messrs. Dubois & Francois' improved air compressing machine, devised for the use of the larger industries and for mining purposes. With 8 figures, illustrating the apparatus in plan, elevation and detail. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 435. Price 10 cents. To be had at this office and from all newsdealers.

SHAFTING, PULLEYS,

HANGERS, AND GEARING.
Get estimate from Christiana Machine Co., 206 No. 4th Street, Phila., Pa., before ordering.

PHOTOGRAPHIC OUTFITS

Every description of first-class APPARATUS. Outfits from \$8 upward. Send for our catalogue of supplies which gives full information regarding this new method of PHOTOGRAPHY. Anybody can make good Photographs with the Dry Plate outfits. No previous knowledge of the art necessary. Business suitable for everybody. \$50 to \$75 per week easily made. Process simple and sure. Catalogue of 180 pages with complete instructions of how to make Pictures, sent on receipt of 20 cents for postage. Address
L. M. PRINCE & BRO.,
148 West Fourth Street, Cincinnati, Ohio.
Ohio Agents for the Blair Camera.

NAVAL ARCHITECTURE.—AN INTERESTING review, by Mr. E. Duncan, of the progress that has been made in this branch of science during the last fifty years. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 589. Price 10 cents. To be had at this office and from all newsdealers.

Scientific American
Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid Magazine of Architecture, richly adorned with elegant plates in colors, and with fine engravings; illustrating the most interesting examples of modern Architectural Construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with full Plans, Specifications, Costs, Bills of Estimate, and Sheets of Details.

Architects, Builders, and Owners will find this work valuable in furnishing fresh and useful suggestions. All who contemplate building or improving homes or erecting structures of any kind, have before them in this work an almost endless series of the latest and best examples from which to make selections, thus saving time and money.

Many other subjects, including Sewerage, Piping, Lighting, Warming, Ventilating, Decorating, Laying Out of Grounds, etc., are illustrated. An extensive Compendium of Manufacturers' Announcements is also given, in which the most reliable and approved Building Materials, Goods, Machines, Tools, and Appliances are described and illustrated, with addresses of the makers, etc.

The fullness, richness, cheapness, and convenience of this work have won for it the Largest Circulation of any Architectural publication in the world. Sold by all newsdealers.

MUNN & CO., Publishers,
361 Broadway, New York.

Building Plans and Specifications.

In connection with the publication of the BUILDING EDITION of the SCIENTIFIC AMERICAN, Messrs. Munn & Co. furnish Plans and Specifications for Buildings of every kind, including Public Buildings, Churches, Schools, Stores, Dwellings, Carriage Houses, Barns, etc. In this work they are assisted by able and experienced architects.

Those who contemplate building, or who wish to alter, improve, extend, or add to existing buildings, whether wings, porches, bay windows, or attic rooms, are invited to communicate with the undersigned. Our work extends to all parts of the country. Estimates, plans, and drawings promptly prepared. Terms moderate. Address
MUNN & CO.,
361 Broadway, New York.

PRINTING INKS.

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard Sts., Phila., and 47 Rose St., opp. Duane St., N. Y.